


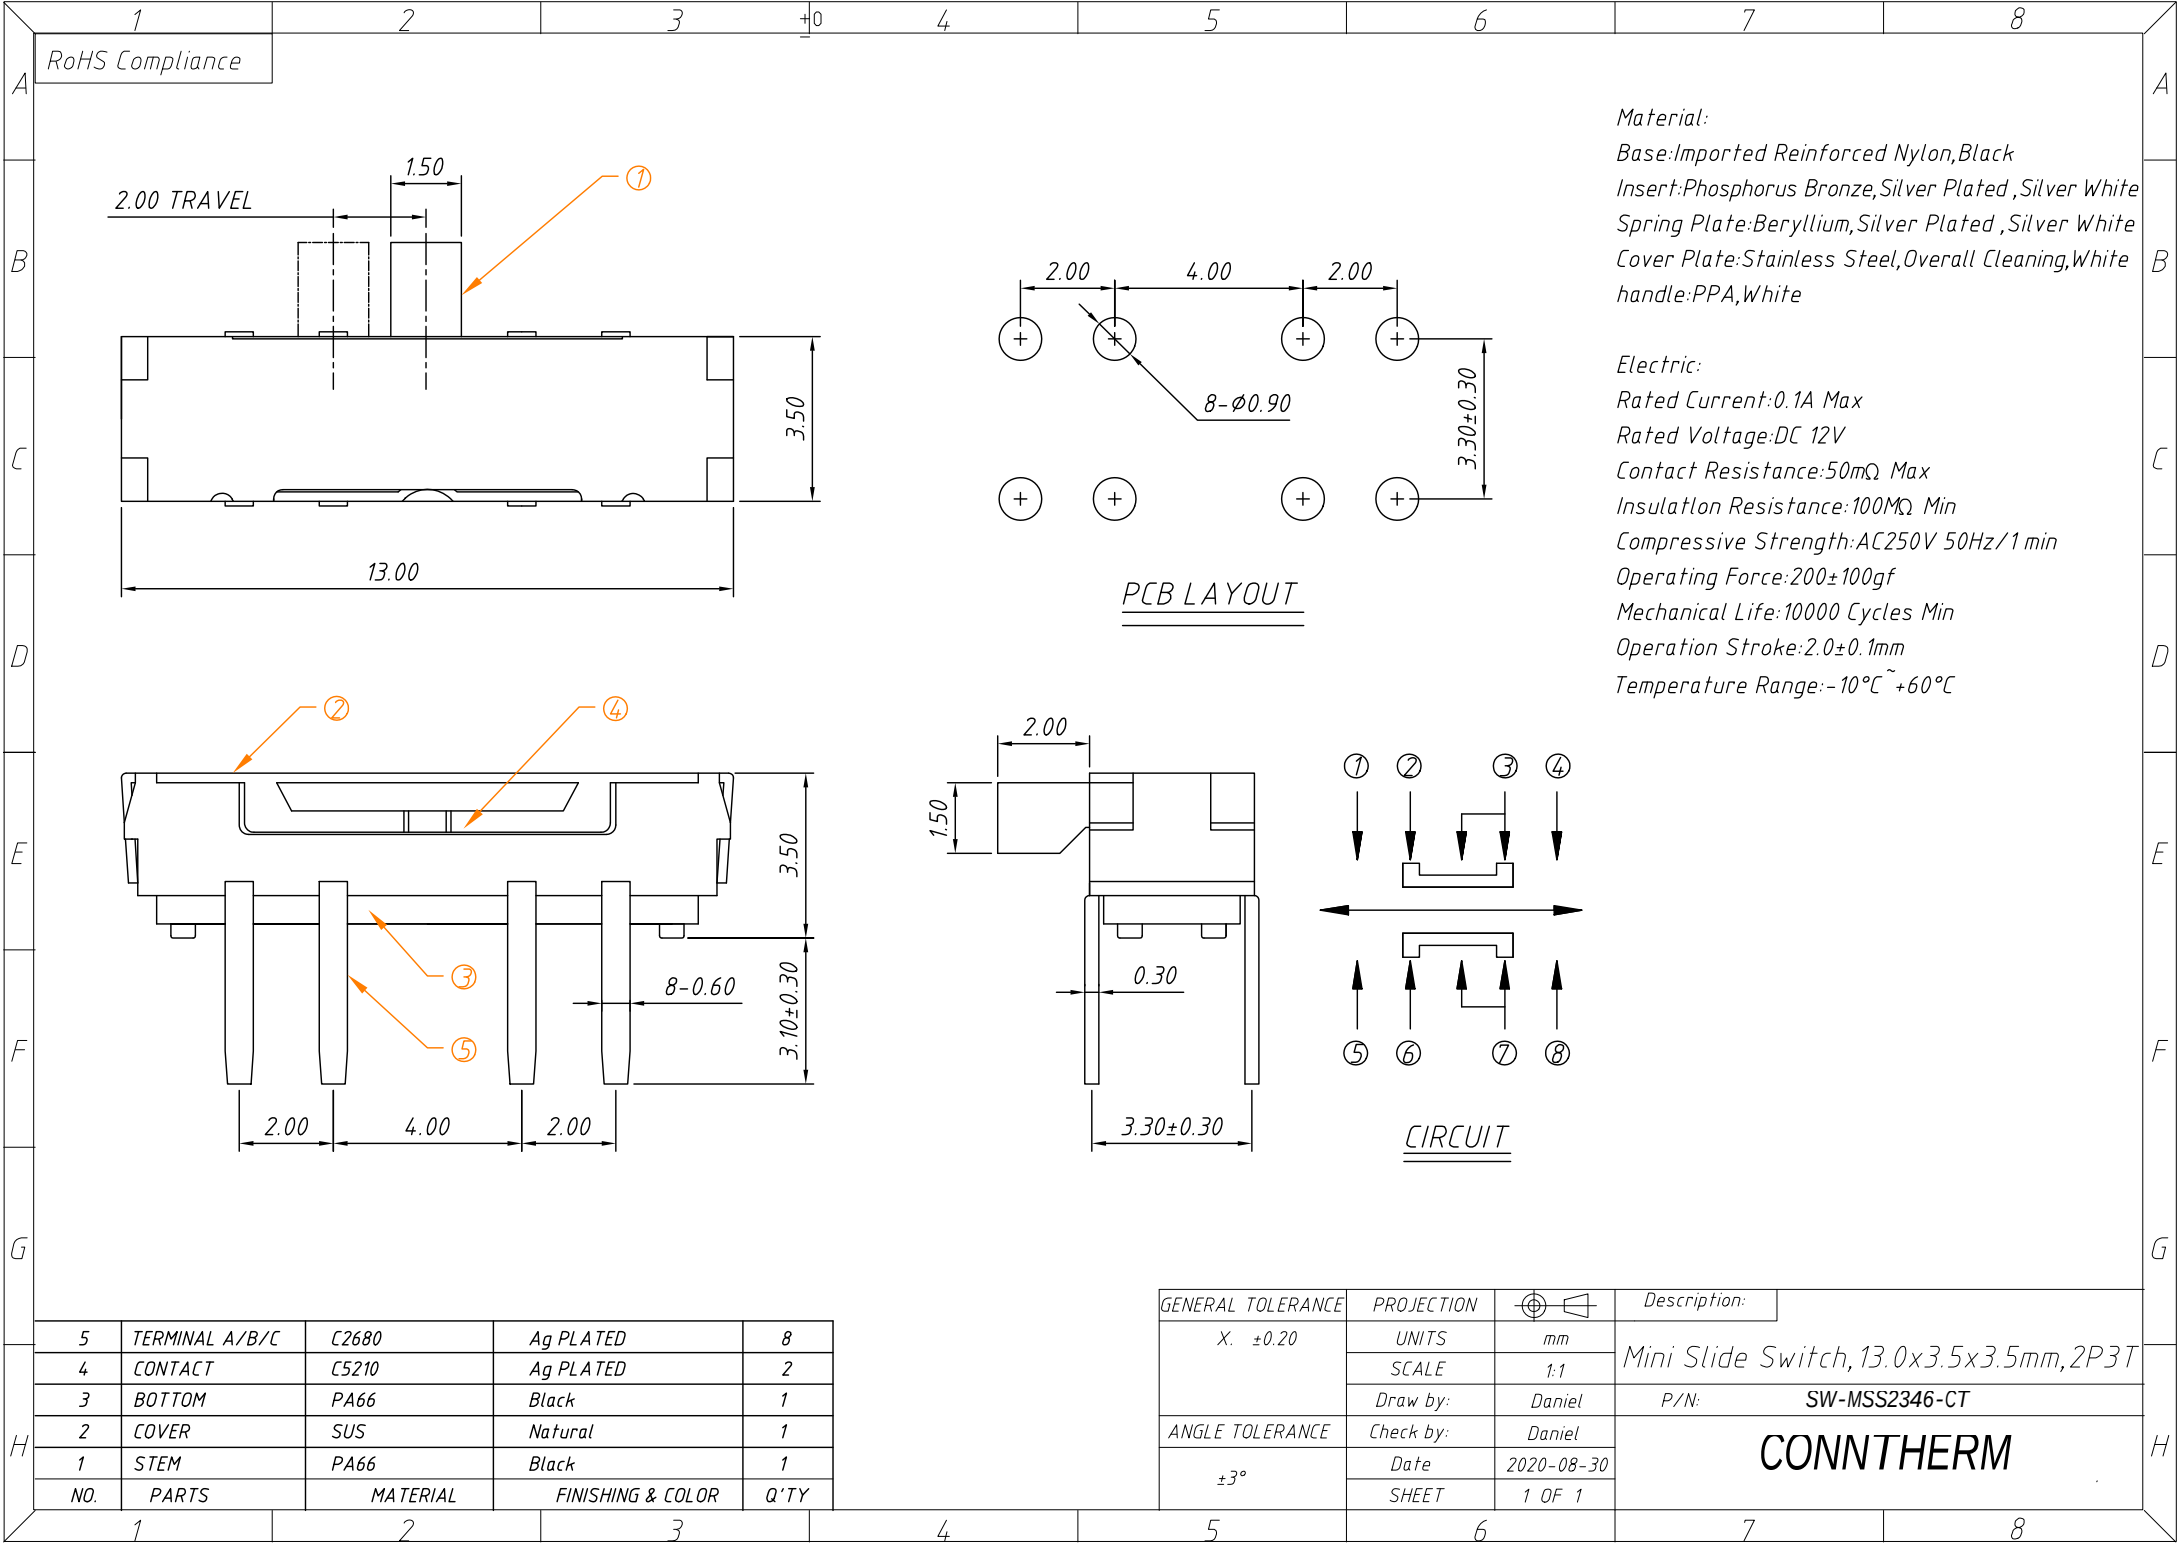

Material:
Base:Imported Reinforced Nylon,Black
Insert:Phosphorus Bronze,Silver Plated ,Silver White
Spring Plate:Beryllium,Silver Plated ,Silver White
Cover Plate:Stainless Steel,Overall Cleaning,White
handle:PPA,White

Electric:
Rated Current:0.1A Max
Rated Voltage:DC 12V
Contact Resistance:50mΩ Max
Insulation Resistance:100MΩ Min
Compressive Strength:AC250V 50Hz/1 min
Operating Force:200±100gf
Mechanical Life:10000 Cycles Min
Operation Stroke:2.0±0.1mm
Temperature Range:-10℃~+60℃

PCB LAYOUT

CIRCUIT

5	TERMINAL A/B/C	C2680	Ag PLATED	8
4	CONTACT	C5210	Ag PLATED	2
3	BOTTOM	PA66	Black	1
2	COVER	SUS	Natural	1
1	STEM	PA66	Black	1
NO.	PARTS	MATERIAL	FINISHING & COLOR	Q'TY

GENERAL TOLERANCE	PROJECTION		Description:
X. ±0.20	UNITS	mm	Mini Slide Switch, 13.0x3.5x3.5mm, 2P3T
	SCALE	1:1	
	Draw by:	Daniel	
ANGLE TOLERANCE	Check by:	Daniel	P/N: SW-MSS2346-CT
±3°	Date	2020-08-30	CONNTHERM
	SHEET	1 OF 1	