
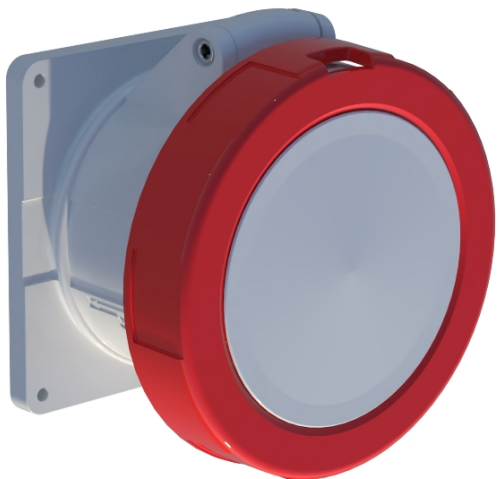
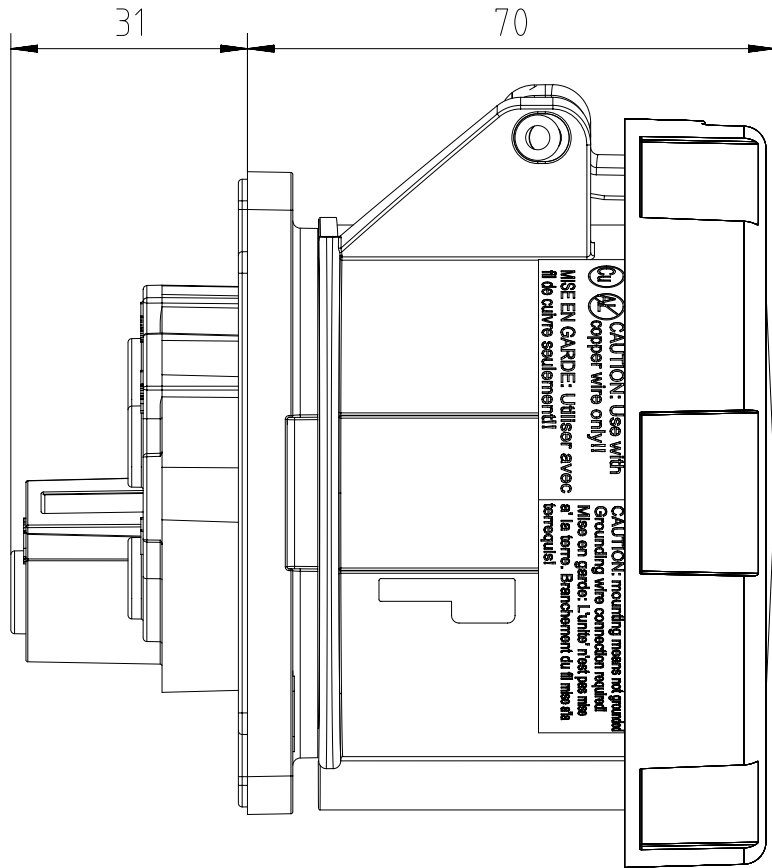


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA101319R1000	Easy&Safe	432ERU6W	Panel mounted socket	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP67	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 6 mm ²	12 - 10 AWG	Screw	75x75	Straight	0.23 Kg

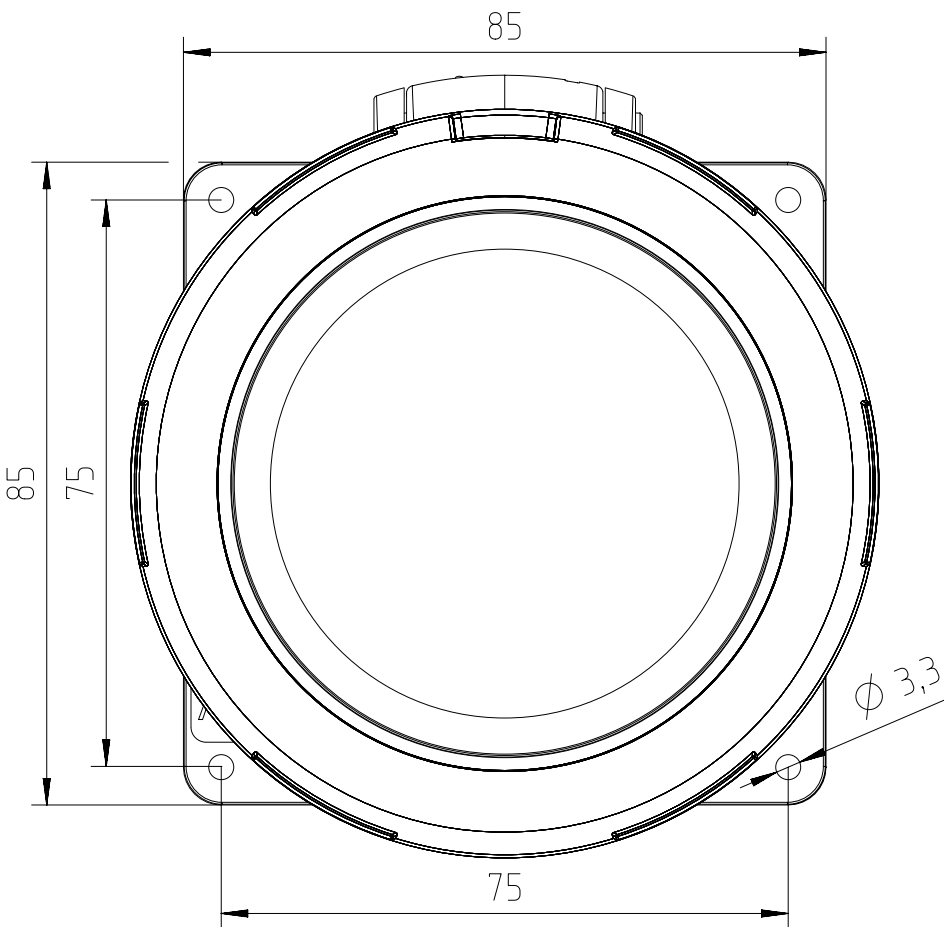

CE
IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 230 g				Zul. Abw./Tolerances:		Maßstab / Scale : 1:1		A3			
 Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING			
Teileindex / Partindexnumber:						432ERU6W Panel mounted socket <i>Panel mounted socket</i>					
minor change:											
				Gez.	25.11.2024						
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	06.02.2025						
				Checked	HBENMANAA	M 2CMA101319R1000					
				Amphenol Tuchel Industrial GmbH							
01	2024-00052	25.11.2024	WBEN							Blatt / Sheet 1	
Index	Änderung / Description	Datum / Date	Name			Ers. f. / Replacement for :				1 Bl.	