

LED Modules 557x26mm LEDIL LIANNA family are LED module based on the CREE LED[®] J Series[®] 2835 G class and J class optimized for cost effective and high efficacy applications and for LEDIL's LIANNA 2R optics. LED Modules 557x26mm LEDIL LIANNA family are providing optimized and easy integration, with excellent quality, reliability and precision.

- High efficacy **219 lm/W** and up to **16430 lm**.
- LM-80 lifetime projections (IEC 62717) **> 100,000 (L70)¹**
- Quick and effective heat dissipation due to the using MCPCB 1.0 mm with thermal conductivity 2.2 W/mK, or standard FR4 1.6mm, Lead Free HASL.
- EPREL registered product.
- Available CCT 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K.
- Available CRI 80 or 90.



➤ **SPECIFICATION**

LED FAMILY	MOD-72R557x26-JB2835B						
CCT/SDCM	2700K 3-STEP	3000K 3-STEP	3500K 3-STEP	4000K 3-STEP	5000K 3-STEP	5700K 3-STEP	6500K 3-STEP
Viewing Angle	120°						
Nominal Module Lumen Output ²	G class CRI 80						
	2012 lm	2088 lm	2158 lm	2220 lm	2220 lm	2220 lm	2214 lm
	G class CRI 90						
	1708 lm	1784 lm	1847 lm	1910 lm	1910 lm	1910 lm	1902 lm
	J class CRI 80						
	1942 lm	2018 lm	2087 lm	2150 lm	2150 lm	2150 lm	2150 lm
Nominal Efficacy ²	G class CRI 80						
	192 lm/W	200 lm/W	206 lm/W	212 lm/W	212 lm/W	212 lm/W	212 lm/W
	G class CRI 90						
	163 lm/W	171 lm/W	177 lm/W	182 lm/W	182 lm/W	182 lm/W	182 lm/W
	J class CRI 80						
	185 lm/W	192 lm/W	199 lm/W	205 lm/W	205 lm/W	205 lm/W	205 lm/W
CRI	80; 90						
	80; 90						
Nominal Driving Current	110 mA						
Voltage DC (typ.) ²	48 V						
Power Consumption ²	10.6 W						
Max. LED module working current³	0.96 A / module						
Voltage DC (max) ³	57.2 V						
Max power³	108.6 W						
Max. LED module lumen output³	G class CRI 80						
	14895	15458	15969	16430	16430	16430	16379
	G class CRI 90						
	13338	13932	13666	14904	14904	14904	14796
	J class CRI 80						
	14082	14634	15138	15590	15590	15590	15590
Number of LEDs	72						
	72						
Power Supply Type	Constant Current						
Risk Group Classification ⁴	RG-1 Low Risk for 2700K, 3000K, 4000K; RG-2 Moderate Risk for 5700K/6500K when above 262 mA per LED						
Energy Class	G class CRI 80						
	B	B	B	A	A	A	A
	G class CRI 90						
	C	C	C	C	C	C	C
	J class CRI 80						
	B	B	B	B	B	B	B
Operating Temperature	-30°C + +60°C						
	-30°C + +60°C						
Tc max.	85°C						
Lifetime ¹ /Tc life	>102 000 h @ 85°C/105°C, 240 mA,						

¹ Lifetime of LEDs as declared by the manufacturer **CREE LED®** according to [IES LM-80-2015 Testing Results Revision:32 :2025](#).

² Source performance in real-life conditions at Tc=55°C, 110 mA without heatsink.

³ External heatsink required.

⁴ According to [Eye safety Cree document](#)

➤ **FEATURES**

Application:


- ❖ Task lighting
- ❖ Accent lighting
- ❖ Decorative lighting

- ❖ General lighting
- ❖ Recessed furniture LED spotlight


Features:

- ❖ The module is dimmable by current set (0-100%)
- ❖ Long Lifetime
- ❖ Energy Saving


EPREL Database link
QR CODE

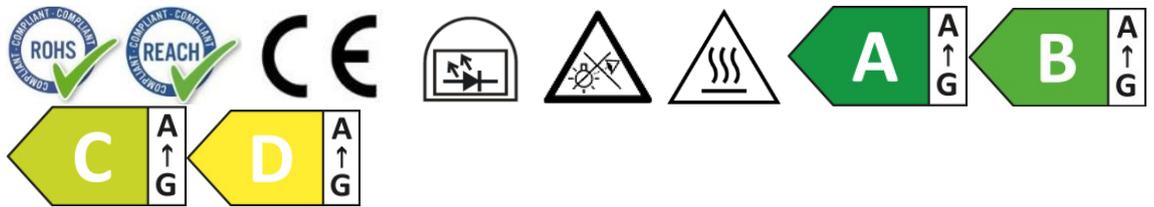


➤ **TYPICAL SPATIAL DISTRIBUTION**

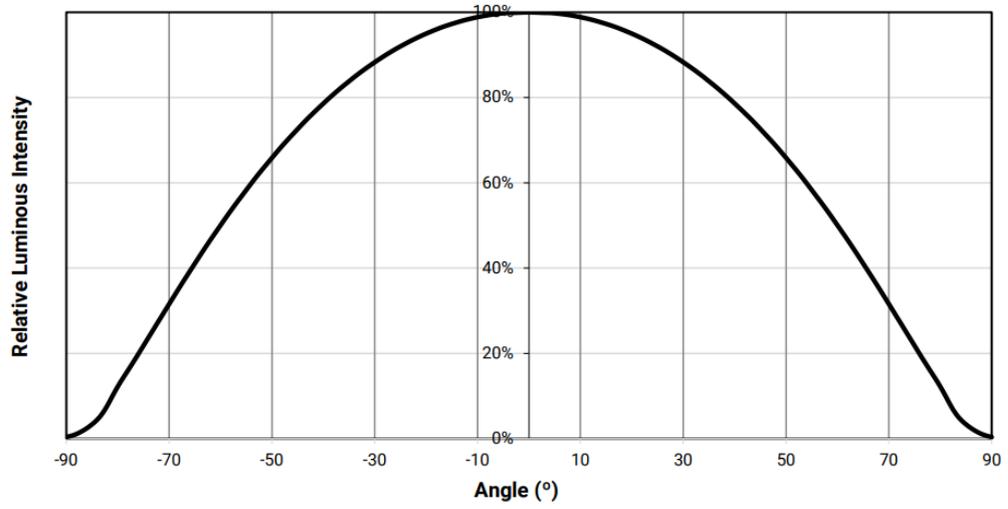


➤ **RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT (mA) J class**

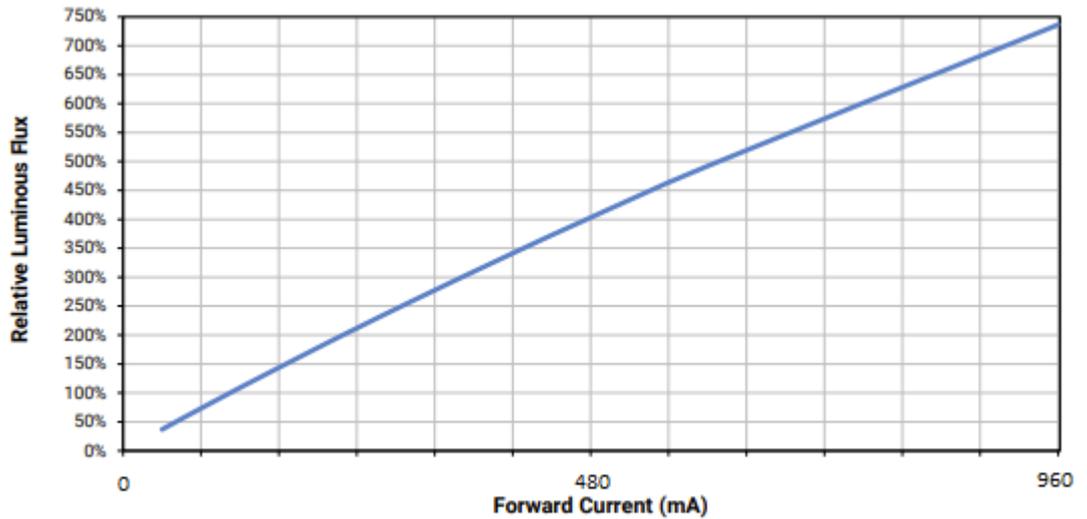


➤ **LUMINOUS EFFICACY (lm/W) VS. MODULE LED POWER (W) G class**

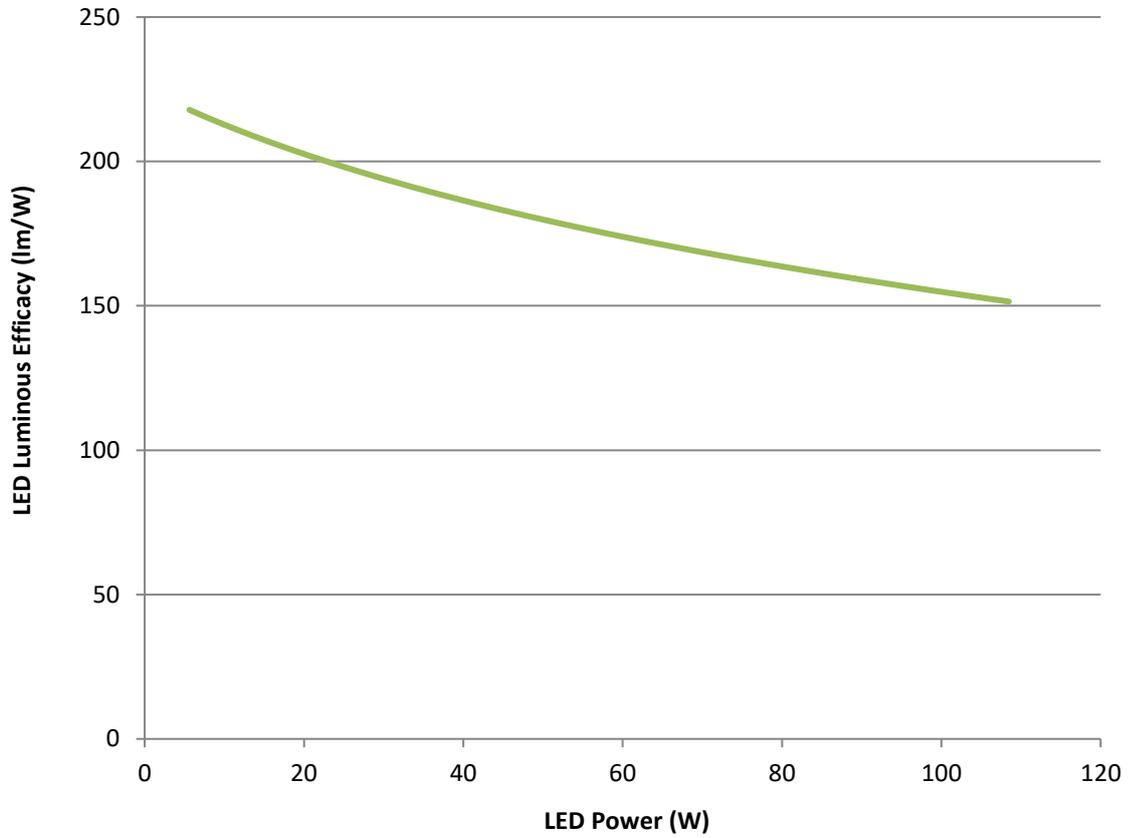


➤ **LUMINOUS FLUX VS. JUNCTION TEMPERATURE**

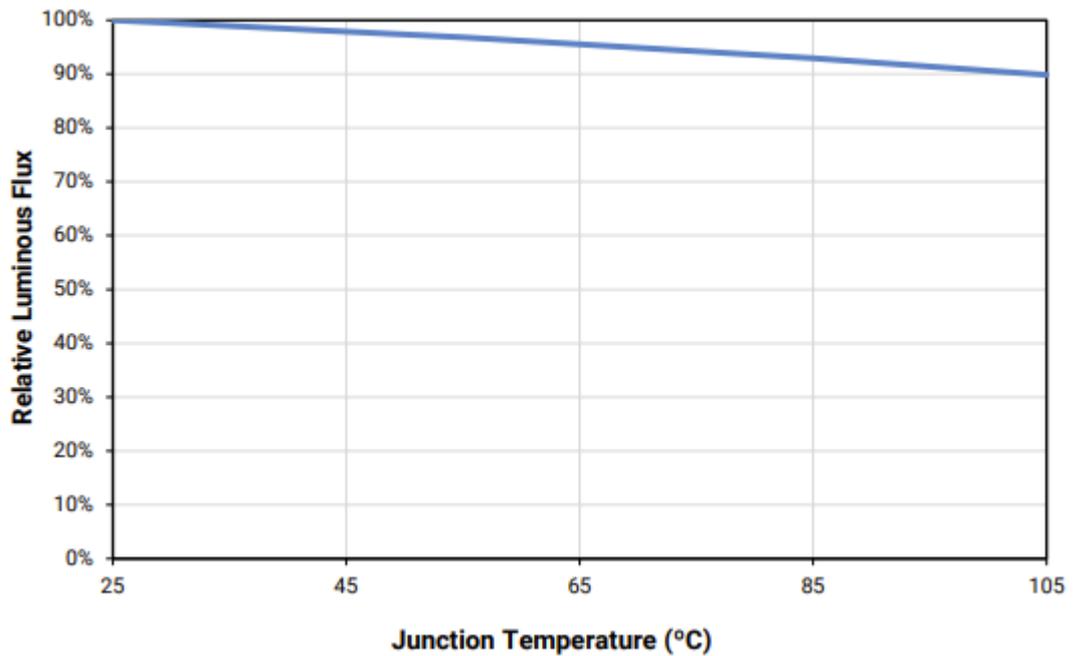


➤ RELATIVE CHROMATICITY VS. TEMPERATURE

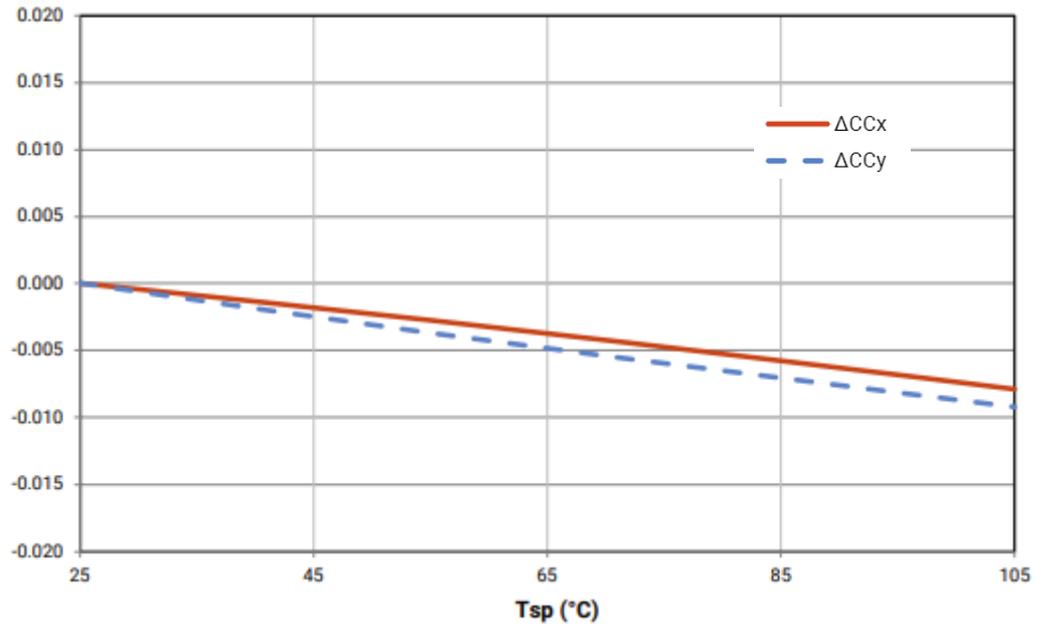

➤ RELATIVE CHROMATICITY VS. CURRENT

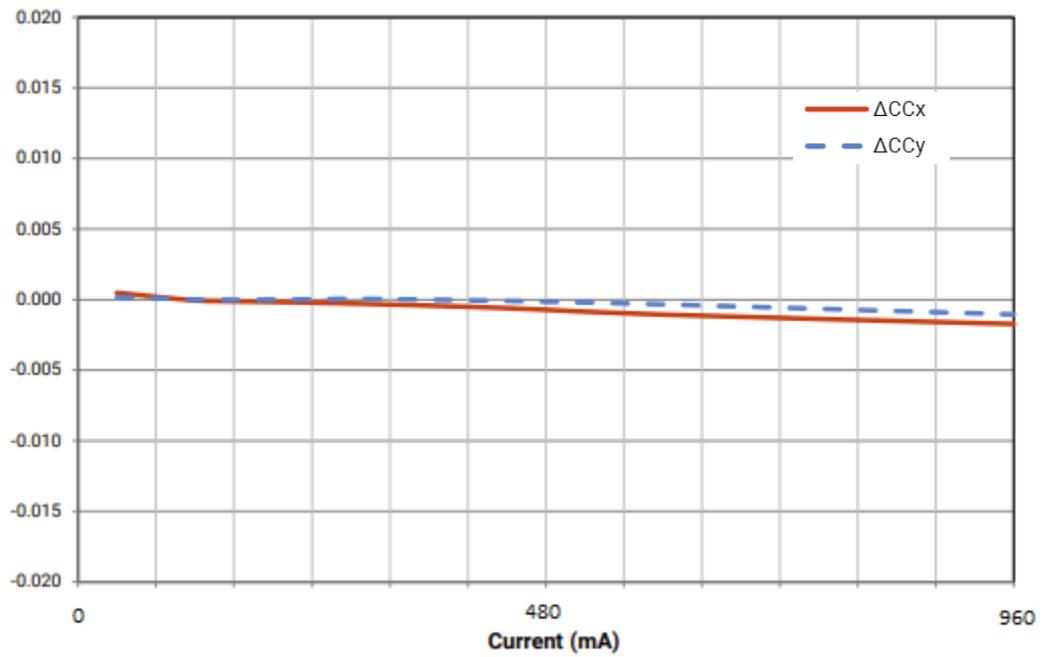


➤ **DIMENSIONS**

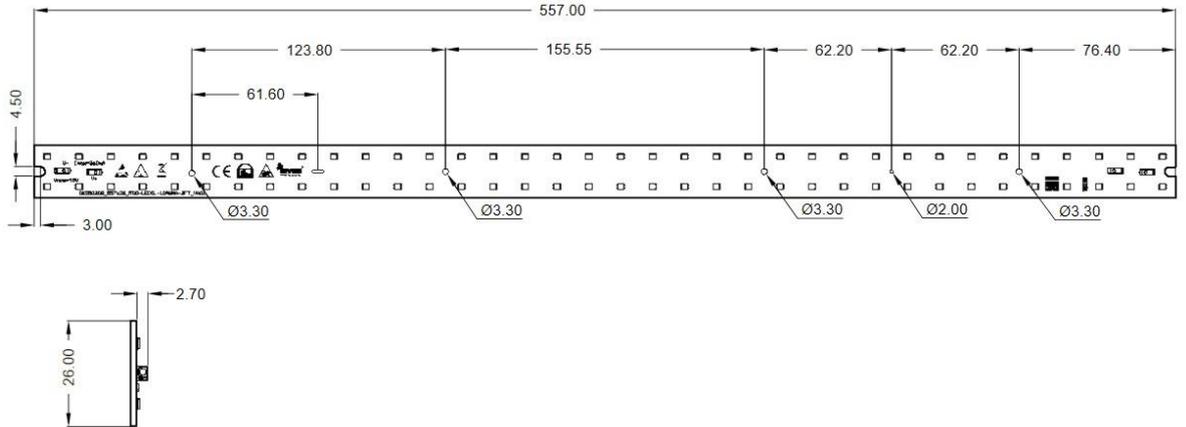

Notes:
Drawing is not to scale.
All dimensions are in millimeters.

MECHANICAL SPECIFICATION		
Dimensions	557 x 26 mm	
Board Thickness	1.0 mm	1.6 mm
Board Material	MCP PCB, 5052 Alloy, 2.2W/(m²K); high reflectivity white soldermask	FR4; high reflectivity white soldermask
Shape	Rectangular	


➤ **CONNECTION**

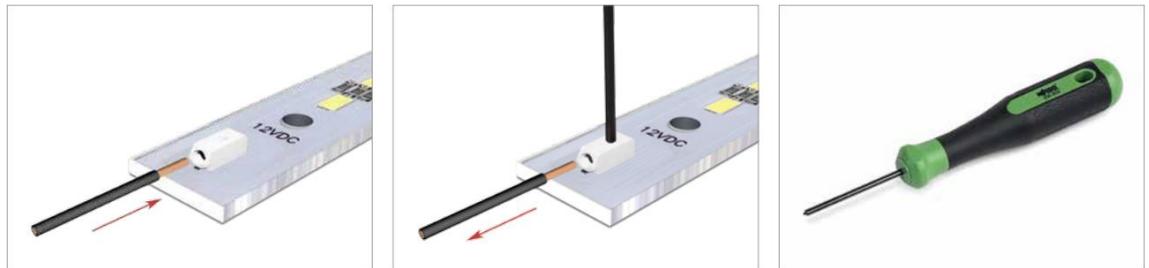


Inserting solid conductors via push-in termination.

Easy conductor removal, e.g., via 206-859 operating tool.

➤ **ELECTRICAL SCHEMA**

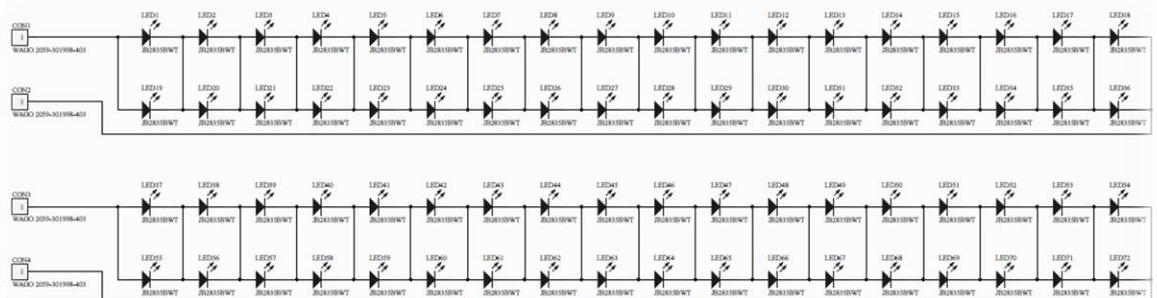

➤ **ELECTRICAL
INSTALLATION**

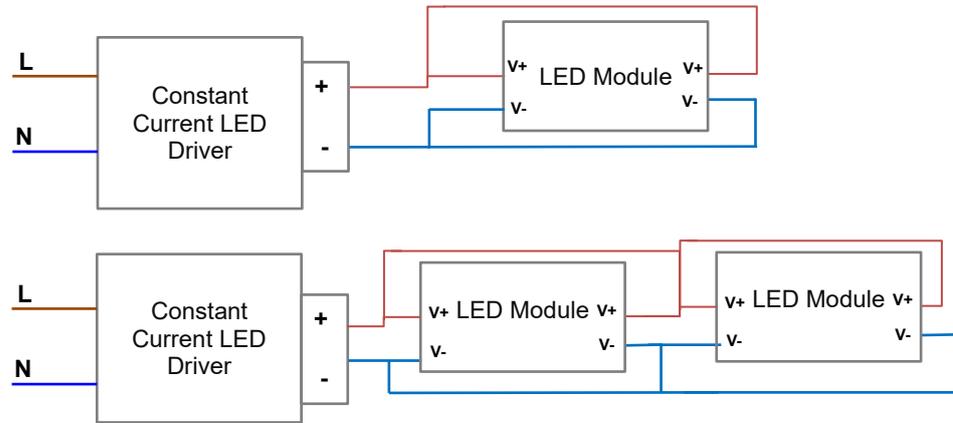

MOD-FR72R557X26-JB2835BJ-4080-N-VA01	LED Module 557x26 mm, High Efficacy High Reflectivity White Soldermask, 72 LED, JB2835B class J, 4000K, CRI 80, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-5780-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 5700K, CRI 80, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-6580-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 6500K, CRI 80, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-2790-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 2700K, CRI 90, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-3090-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 3000K, CRI 90, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-4090-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 4000K, CRI 90, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-5790-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 5700K, CRI 90, 1.6 mm FR-4
MOD-FR72R557X26-JB2835BJ-6590-N-VA01	LED Module 557x26 mm, High Efficacy, High Reflectivity White Soldermask, 72 LED, JB2835B class J, 6500K, CRI 90, 1.6 mm FR-4

➤ **COMMERCIAL INFORMATION**

COMMERCIAL INFORMATION	
Connector	WAGO 2059
Available Lenses	LEDIL LIANNA-2R-30 LEDIL LIANNA-2R-60 LEDIL LIANNA-2R-90
Minimum Order Quantity	10 pcs.
Warranty	2 years
Power Supply	FLS-25-700DALI2-LA1 EAGLERISE LCM-25 MEAN-WELL LCM-25DA MEAN-WELL LDC-35 MEAN-WELL LDC-35B MEAN-WELL

➤ **GENERAL TERMS OF USE**

- The range of acceptable input voltages must include the expected voltage dropout across the LED string check on CREE LED [Website J Series® 2835](#)
- Connecting to the power supply should be done when the power supply is off.
- Modules should be connected to heatsink to dissipate heat from LED module. Temperature on the module shouldn't be higher than recommended by Cree®. Due to power of the module, appropriate heatsink should be used with thermal conductive tape or paste. The lower temperature on LED module causes longer lifetime.
- During installation of the LED module it is absolutely necessary to use ESD protection. Luminaire design should protect the module from ESD. Installation of the LED module should be done by qualified person.
- Lenses, diodes and other components on the module must be protected against mechanical damage and exposure to liquids and dirt.
- The modules shouldn't have contact with hazardous and corrosive substances or aromatic organic compounds such as toluene, acetone, xylene, benzene.
- For installation of modules use substances recommended and tested by the CREE LED®. List of substances available on the manufacturer's website: [cree-led.com](#)

Niviss is not responsible for any damage or failure due to not comply with above rules.

Otherwise, the complaint will not be taken into account.

➤ **ENVIRONMENTAL CAUTION**



Caution!

It is prohibited to dispose of obsolete and waste electrical and electronic equipment together with regular household wastes. They should be properly sorted and recycled. Old electrical and electronic equipment should be returned to a waste collection point established by a waste-management service. Waste electrical and electronic equipment can be broken down to base materials and then recycled. For more information regarding waste management please contact your local authorities, waste-management service or the seller of electrical and electronic devices.

➤ **DATA DOWNLOAD**

- [3D PDF FILE](#)
- [STEP FILE](#)
- [EU DECLARATION OF CONFORMITY \(CE\)](#)