



Copied or reproduced in whole or in part without the written permission of AMPHENOL is strictly prohibited. Any use of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA103591R1000	Easy&Safe	416EP6B	Plug	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
16 A	200/346 - 240/415V	6 h	50 Hz/60 Hz	IP44	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
1 - 2.5 mm²	14 - 12 AWG	Screw		Straight	0.18 Kg

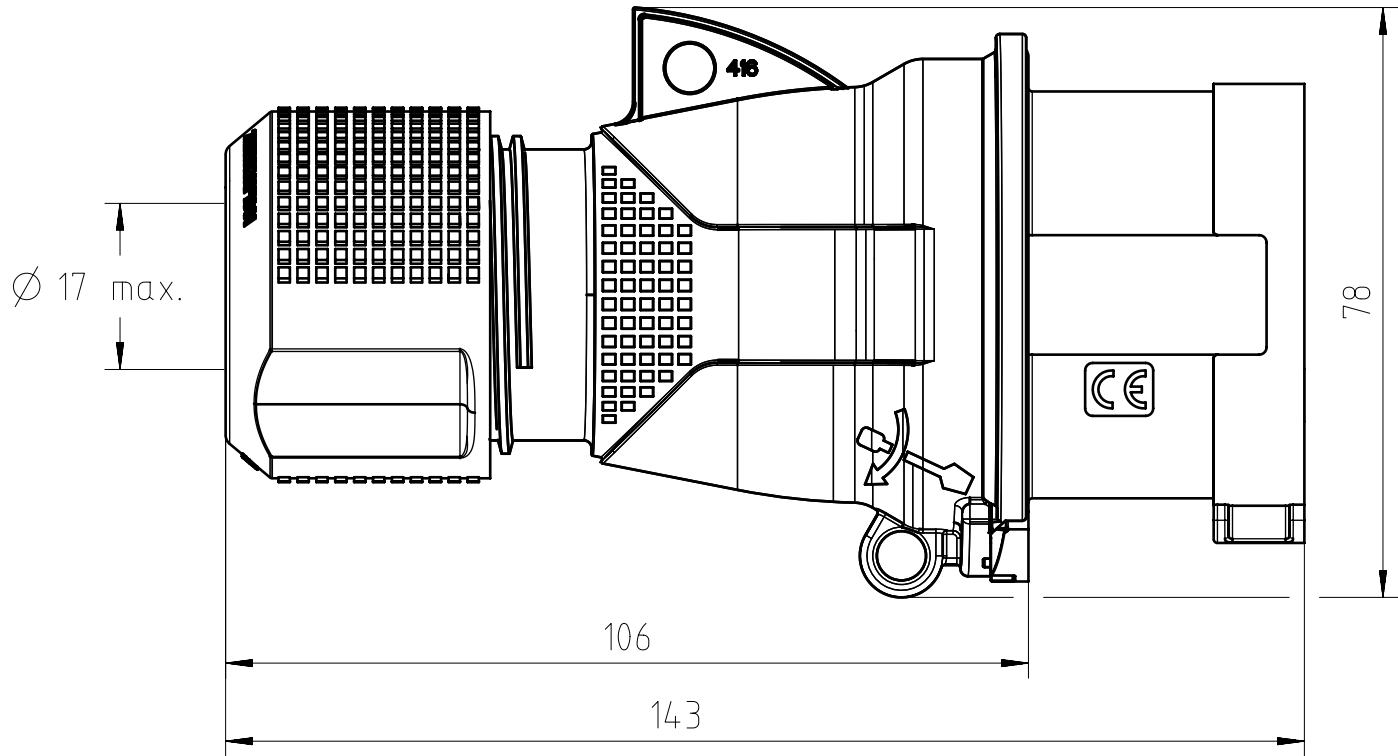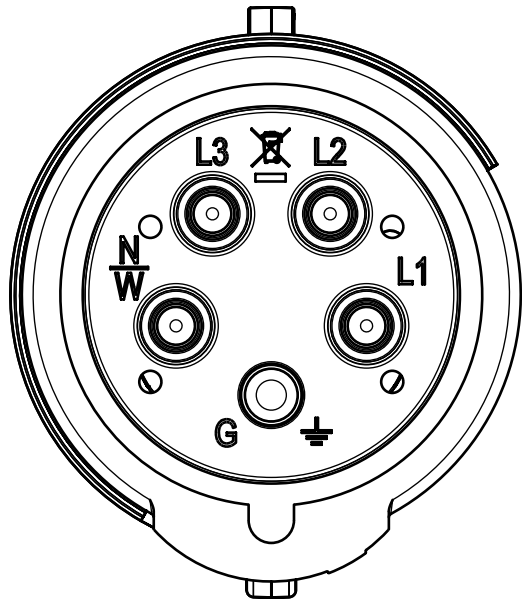

CE

IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 180 g				Zul. Abw./Tolerances:		Maßstab / Scale : 1:1		A3			
Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING			
Teileindex / Partindexnumber:											
minor change:											
				Gez.	31.12.2025	416EP6B Industrial Plug					
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	01.01.2026						
				Checked	HBENMANAA						
				Amphenol Tuchel Industrial GmbH		M 2CMA103591R1000				Blatt/Sheet 1	
01	202500075	31.12.2025	WBEN							1 Bl.	
Index	Änderung/Description	Datum/Date	Name			Ers. f. / Replacement for :					