


DC Brushless FAN 60x60x15m-A Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 38g (Weight: 38g)

P@Q CURVE (AT RATED VOLTAGE)



DIMENSIONS DRAWING (unit:mm)

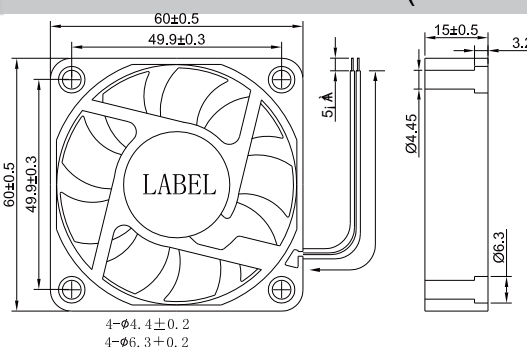

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY

X means bearing type, can be S (sleeve bearing), can be B (ball bearing), can be Y (HY bearing), can be SU (sleeve with UL), can be BU (ball with UL), can be YU (HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 2038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG6015L05X		5	1.8~3~6	0.14	0.72	2000	0.268	9.41	1.34	0.053	21.1
MG6015M05X		5	1.8~3~6	0.19	0.96	3000	0.328	11.5	1.86	0.073	24.8
MG6015ML05X		5	1.8~3~6	0.24	1.2	3500	0.406	14.2	2.61	0.103	29.8
MG6015H05X		5	1.8~3~6	0.29	1.44	4000	0.468	16.4	3.5	0.138	31.2
MG6015L12X		12	7~13.5	0.06	0.72	2000	0.268	9.41	1.34	0.053	21.1
MG6015M12X		12	7~13.5	0.08	0.96	3000	0.328	11.5	1.86	0.073	24.8
MG6015ML12X		12	7~13.5	0.1	1.2	3500	0.406	14.2	2.61	0.103	29.8
MG6015H12X		12	7~13.5	0.12	1.44	4000	0.468	16.4	3.5	0.138	31.2
MG6015HL12X		12	7~13.5	0.14	1.68	4500	0.524	18.3	4.35	0.171	34.8
MG6015HH12X		12	7~13.5	0.16	1.92	5000	0.584	20.5	5.34	0.210	36.6
MG6015HV12X		12	7~13.5	0.18	2.16	5500	0.640	22.4	6.35	0.25	39.0
MG6015VH12X		12	7~13.5	0.2	2.4	6000	0.603	21.1	7.33	0.289	41.0
MG6015L24X		24	18~26.5	0.03	0.72	2000	0.268	9.41	1.34	0.053	21.1
MG6015M24X		24	18~26.5	0.04	0.96	3000	0.328	11.5	1.86	0.073	24.8
MG6015ML24X		24	18~26.5	0.05	1.2	3500	0.406	14.2	2.61	0.103	29.8
MG6015H24X		24	18~26.5	0.06	1.44	4000	0.468	16.4	3.5	0.138	31.2
MG6015HL24X		24	18~26.5	0.07	1.68	4500	0.524	18.3	4.35	0.171	34.8
MG6015HH24X		24	18~26.5	0.08	1.92	5000	0.584	20.5	5.34	0.210	36.6
MG6015HV24X		24	18~26.5	0.09	2.16	5500	0.640	22.4	6.35	0.25	39.0
MG6015VH24X		24	18~26.5	0.1	2.4	6000	0.603	21.1	7.33	0.289	41.0