

广州美嘉科技有限公司


UL[®] US CE RoHS

DC Brushless FAN 40x40x10mm-B Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame: Plastic(Flammability:UL94V-0)
扇叶材质: 塑胶:(等级:UL94V-0)
Impeller: Plastic:(Flammability:UL94V-0)
风扇单重: 16g(Weight: 16g)

P@Q CURVE(AT RATED VOLTAGE)

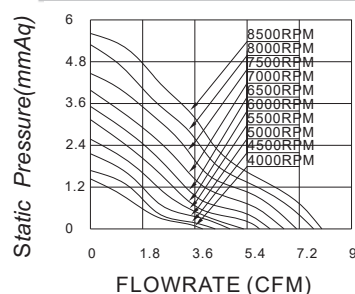

DIMENSIONS DRAWING(unit:mm)

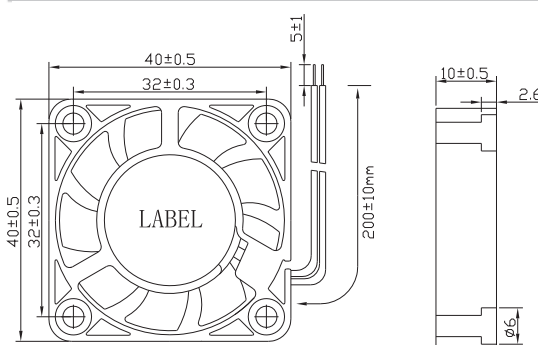

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extno P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	BY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG4010L05X		5	1.8~3~6	0.072	0.36	4500	0.122	4.31	1.71	0.067	24.2
MG4010LV05X		5	1.8~3~6	0.096	0.48	5000	0.136	4.81	2.21	0.087	27.3
MG4010LM05X		5	1.8~3~6	0.12	0.60	5500	0.148	5.23	2.54	0.100	29.2
MG4010M05X		5	1.8~3~6	0.144	0.72	6000	0.164	5.80	3.06	0.120	31.1
MG4010ML05X		5	1.8~3~6	0.168	0.84	6500	0.177	6.24	3.50	0.138	33.4
MG4010H05X		5	1.8~3~6	0.19	0.96	7000	0.187	6.59	3.91	0.154	35.1
MG4010HL05X		5	1.8~3~6	0.22	1.08	7500	0.201	7.10	4.51	0.178	37.1
MG4010HH05X		5	1.8~3~6	0.24	1.2	8000	0.219	7.73	5.22	0.206	39.1
MG4010VH05X		5	1.8~3~6	0.26	1.32	8500	0.227	8.02	5.57	0.219	40.2
MG4010L12X		12	8.5~13.5	0.03	0.36	4500	0.122	4.31	1.71	0.067	24.2
MG4010LV12X		12	8.5~13.5	0.04	0.48	5000	0.136	4.81	2.21	0.087	27.3
MG4010LM12X		12	8.5~13.5	0.05	0.60	5500	0.148	5.23	2.54	0.100	29.2
MG4010M12X		12	8.5~13.5	0.06	0.72	6000	0.164	5.80	3.06	0.120	31.1
MG4010ML12X		12	8.5~13.5	0.07	0.84	6500	0.177	6.24	3.50	0.138	33.4
MG4010H12X		12	8.5~13.5	0.08	0.96	7000	0.187	6.59	3.91	0.154	35.1
MG4010HL12X		12	8.5~13.5	0.09	1.08	7500	0.201	7.10	4.51	0.178	37.1
MG4010HH12X		12	8.5~13.5	0.10	1.2	8000	0.219	7.73	5.22	0.206	39.1
MG4010VH12X		12	8.5~13.5	0.11	1.32	8500	0.227	8.02	5.57	0.219	40.2