
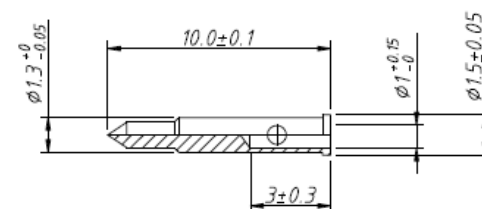



RoHS Compliance

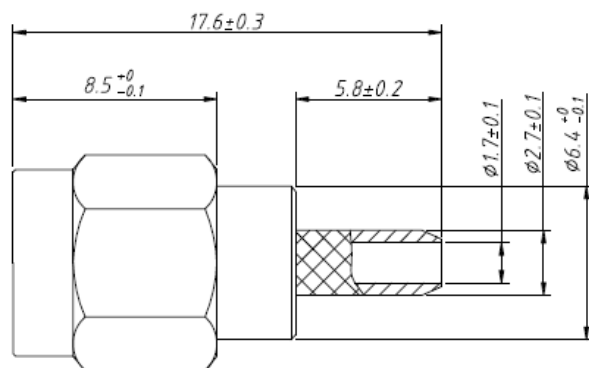

Description:

Material:

Connector Body: Brass, 0.015-0.03um Gold Plated

Insulator: PTFE, White


Tube: Brass, Ni Plated

Pin: Brass, 0.015-0.03um Gold Plated, Salt spray for 48 hours.

Impedance: 50Ω

Frequency Range: 0~6GHz

Durability: 500 Cycles Min

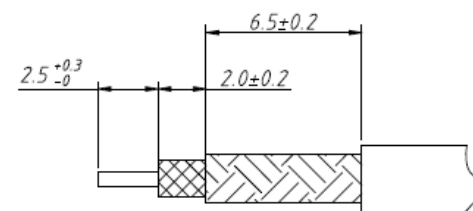

Wire stripping diagram

ANGLE TOLERANCE	PROJECTION		Description:	
±3°			SMA connector	
GENERAL TOLERANCE	UNITS	mm	PN	SMA101G02RG174-CT
x.x ±0.30	SHEET SIZE	A4		CONNTHERM
x.xx ±0.20	Draw:	Song		
x.xxx ±0.10	Check:	Daniel		