
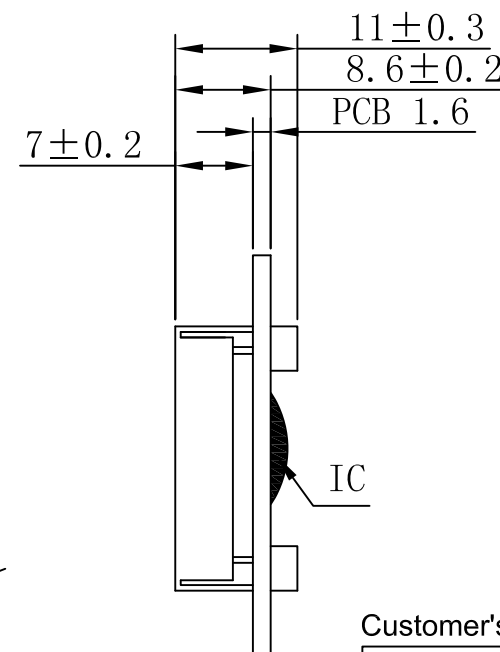



Revised Record	1.0	New issue	2012-12-6						

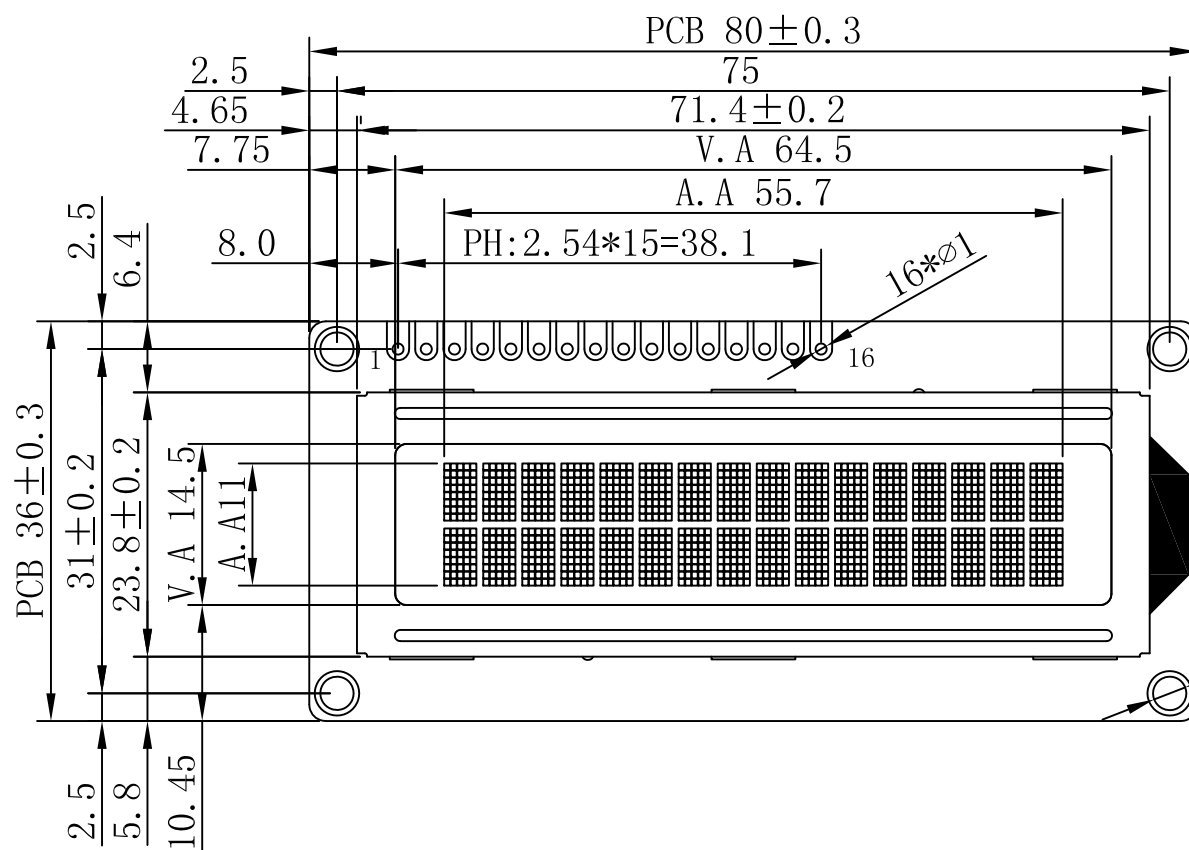

INTERFACE:	
1	VSS
2	VDD(5.0V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5.0V)
16	LED-K

Customer's Choices:

DISPLAY TYPE:	
View angle:	
Temp:	
Voltage:	
IC:	
Fonts:	
Backlight:	
Other:	

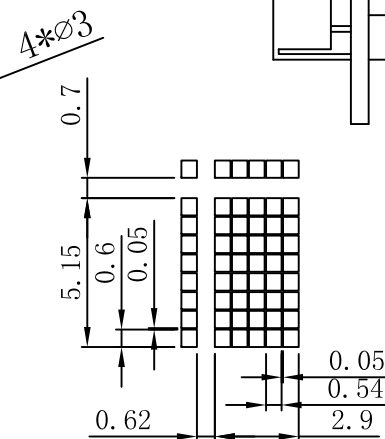

NOTES:

- | | | |
|----------------------------|------------------------------|------|
| 01. DISPLAY TYPE: | STN-YG/POSITIVE/TRANSMISSIVE | RoHS |
| 02. OPERATING VOLTAGE: | VOP=4.7V,VDD=5.0V | |
| 03. OPERATING TEMPERATURE: | -20°C~+70°C | |
| 04. STORAGE TEMPERATURE: | -30°C~+80°C | |
| 05. DRIVE MODE: | 1/16DUTY,1/5BIAS | |
| 06. VIEWING DIRECTION: | 6:00 | |
| 07. DRIVE IC: | ST7066U-0A(OR-EQV) | |
| 08. CONNECTOR: | ZEBER | |
| 09. BACKLIGHT: | LED(YELLOW-GREEN) | |
| 10. CUSTOMER'S PART ID: | BLAZE STANDARD PRODUCT | |

BLAZE Blaze Display Technology Co., Ltd.

DESIGNED BY: BDT-24		VERSION: 1.0
CHECKED BY: BDT-06		PAGE 1 OF 1
APPROVED BY: BDT-02		UNIT: mm
Website: http://www.blazedisplay.com		DATE: 2012-12-6