

Data sheet

Commercial Art.No.: 99.712.0000.7

cable assembly RST20I3K1BF 15 15SW

RST® CLASSIC mains connection cable, female - Schuko plug, number of poles 3, rated voltage 250 V, rated current 16 A, cable type H07RN-F, total length 1.5 m, nominal cross section conductor 1.5 mm², color of coding/ contact carrier black



Commercial Art.No.	99.712.0000.7
EAN	4015573983687
Order Unit	1

Technical data

general

rated current	16 A
rated voltage	250 V
rated impulse voltage	4 kV
continuity resistor	18.2 mOhm
lockable	self-locking (unlocking by tool)
color of coding/ contact carrier	black
Pole codification	L, N, PE
color of housing inclusive strain relief	black

model

type of construction	shrinkage tube
connection type	crimp
nominal cross section conductor	1.5 mm ²
degree of protection (IP)	IP20
wire strip length	9 mm
sheath strip length	35 mm
preparation of conductor ends	ultrasonically compressed wire ends
cable type	H07RN-F
cable color	black
cable diameter min.	9.5 mm
cable diameter max.	9.9 mm
version of cable	female - male CEE 7/4
type of cord set	mains connection cable
version cable end 1	female
version cable end 2	SchuKo plug

shielded	no
----------	----

material

surface finish	silver-plated
halogen free	no
continuous temperature of cable	60 °C
insulation components continuous temperature	100 °C
fire load	0 kWh/St

dimensions

total length	1.5 m
--------------	-------

note

note	The total length may vary up to + / - 3 %.
------	--

classification


ECLASS 11	
ECLASS 8.1	27440604
ETIM 9.0	EC002587
ETIM 8.0	EC002587
ETIM 7.0	EC002587
ETIM 6.0	EC002587
ETIM 5.0	EC002587
ETIM 4.0	EC002587

product compliance

ROHS conformity status	compliant/exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Plumbum
REACH-SVHC CAS numbers	7439-92-1

Fits with

Commercial Art.No.:	Article-type description:	Description:
99.906.0000.7	distributor RST20I3B 3P1 F VG SW	RST® CLASSIC compact distributor 1I / 3O, rated voltage 250 V, rated current 20 A, number of poles 3, degree of protection (ip) IP66/68 (3m 2h) /IP69, number of inputs 1, number of outputs 3, pole codification L, N, PE, color of coding/ contact carrier black, ral number coding/contact insert
99.929.0000.7	distributor RST20I3B 7P1 V SW	RST® CLASSIC multi-distribution unit 1I / 7O, rated voltage 250 V, rated current 20 A, number of poles 3, degree of protection (ip) IP66/68 (3m 2h) /IP69, number of inputs 1, number of outputs 7, pole codification L, N, PE, color of coding/ contact carrier black, ral number coding/contact insert

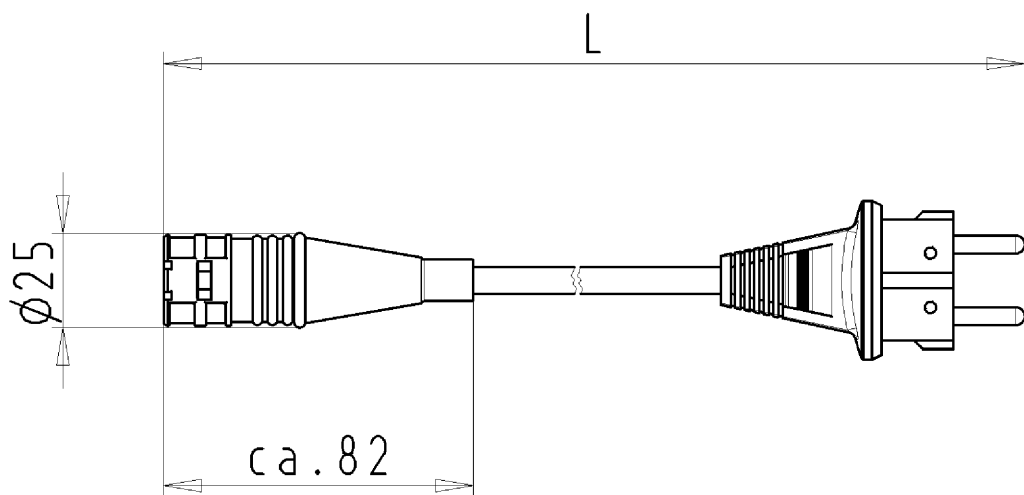

KONFEKT. LEITUNG
 99.712.0000.7 10W
 26.05.2009 HOF
 M1:2