



**SOT-23-6L Plastic-Encapsulate MOSFETS****CJL8820 Dual N-Channel MOSFET**


$V_{(BR)DSS}$	$R_{DS(on)MAX}$	I_D
20V	21m Ω @10V	7A
	24m Ω @4.5V	
	28m Ω @3.8V	
	32m Ω @2.5V	
	50m Ω @1.8V	

**DESCRIPTION**

The CJL8820 uses advanced trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. It is ESD protected. This device is suitable for use as a uni-directional or bi-directional load switch, facilitated by its common-drain configuration.

MARKING:

L8820=Device code
Solid point=Pin1 positioning point
XX=Date Code

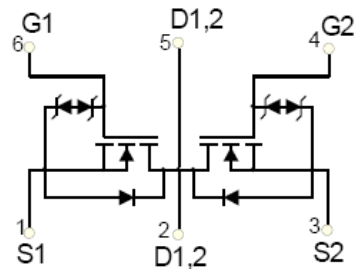Equivalent Circuit**MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)**

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 12	V
Continuous Drain Current	I_D	7	A
Pulsed Drain Current(note1)	I_{DM}^*	25	A
Thermal Resistance from Junction to Ambient	$R_{\theta JA}^{**}$	208.3	$^{\circ}\text{C/W}$
Operation Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^{\circ}\text{C}$
Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	T_L	260	$^{\circ}\text{C}$

*Repetitive rating: Pulse width limited by junction temperature.

** Surface mounted on FR4 board using 1 square inch pad size, 1oz single-side copper.

MOSFET ELECTRICAL CHARACTERISTICS







T_a=25 °C unless otherwise specified

Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC PARAMETERS						
Drain-source breakdown voltage	V _{(BR) DSS}	V _{GS} = 0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =16V,V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±10V, V _{DS} = 0V			±5	μA
Gate threshold voltage (note 1)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.5	0.77	1.1	V
Drain-source on-resistance (note 1)	R _{DS(on)}	V _{GS} =10V, I _D =3A	8	15	21	mΩ
		V _{GS} =4.5V, I _D =3A	10	17	24	mΩ
		V _{GS} =3.8V, I _D =3A	12	18	28	mΩ
		V _{GS} =2.5V, I _D =3A	16	22	32	mΩ
		V _{GS} =1.8V, I _D =3A	25	34	50	mΩ
Forward tranconductance (note 1)	g _{FS}	V _{DS} =5V, I _D =7A	9			S
Diode forward voltage(note 1)	V _{SD}	I _S =1A, V _{GS} = 0V			1	V
DYNAMIC PARAMETERS (note 2)						
Input Capacitance	C _{iss}	V _{DS} =10V,V _{GS} =0V,f =1MHz		650		pF
Output Capacitance	C _{oss}			140		pF
Reverse Transfer Capacitance	C _{rss}			60		pF
Total gate charge	Q _g	V _{DS} =10V,V _{GS} =4.5V,I _D =6A		8		nC
Gate-source charge	Q _{gs}			2.5		nC
Gate-drain charge	Q _{gd}			3		nC
SWITCHING PARAMETERS(note 2)						
Turn-on delay time	t _{d(on)}	V _{GS} =5V,V _{DD} =10V, R _L =1.5Ω,R _{GEN} =3Ω		0.5		ns
Turn-on rise time	t _r			1		ns
Turn-off delay time	t _{d(off)}			12		ns
Turn-off fall time	t _f			4		ns


Notes :

1. Pulse Test : Pulse width≤300μs, duty cycle≤0.5%.
2. Guaranteed by design, not subject to production testing.

Typical Characteristics

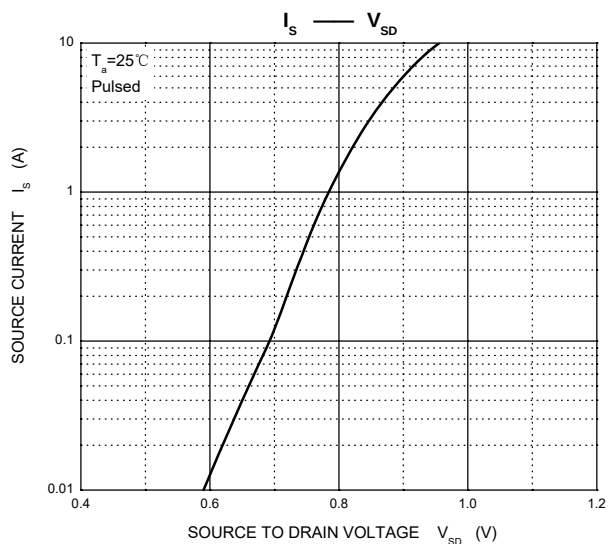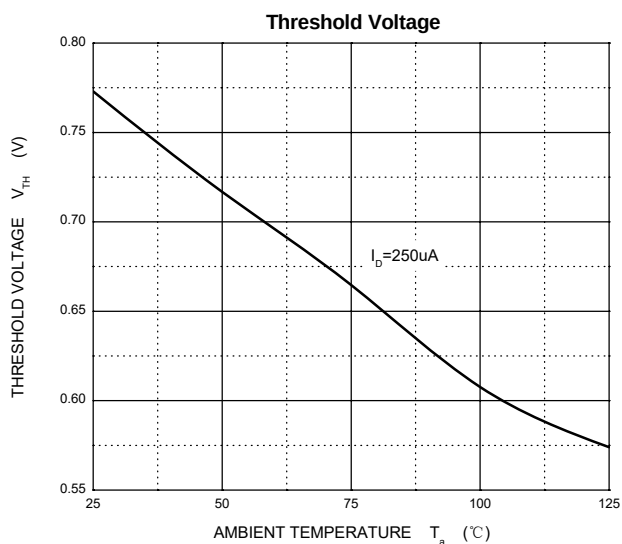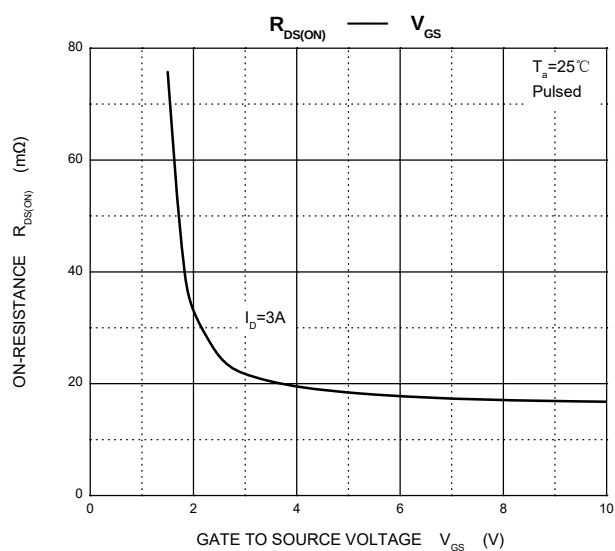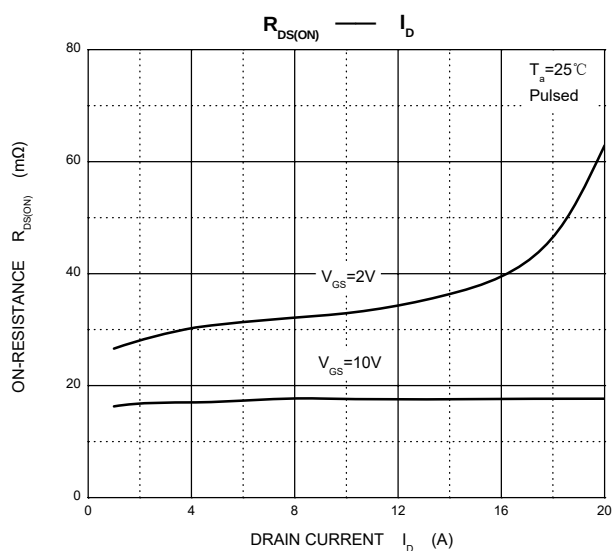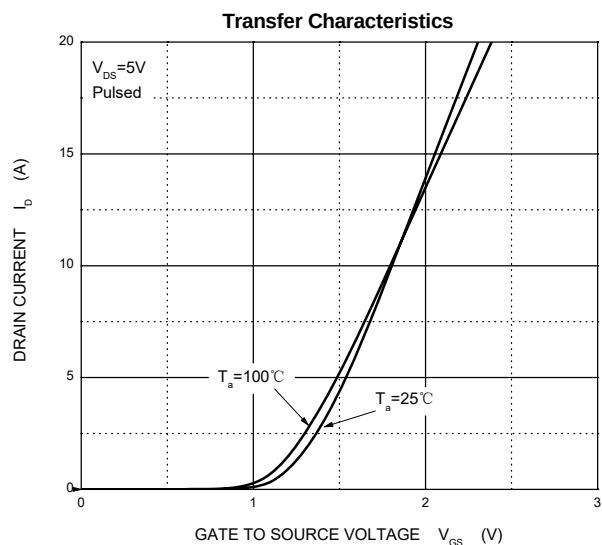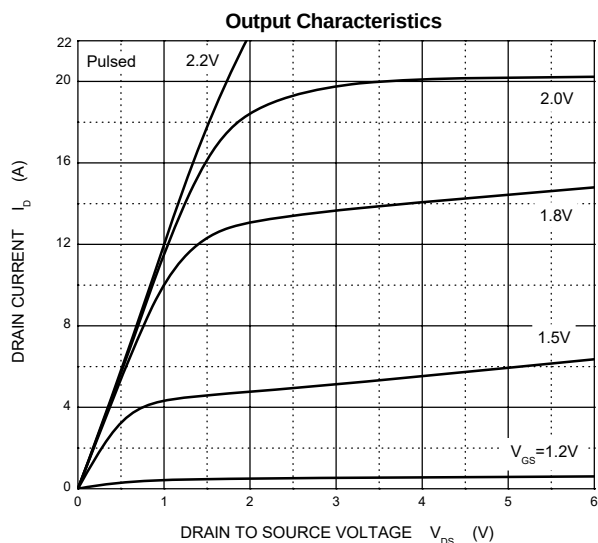


SOT-23-6L Package Outline Dimensions

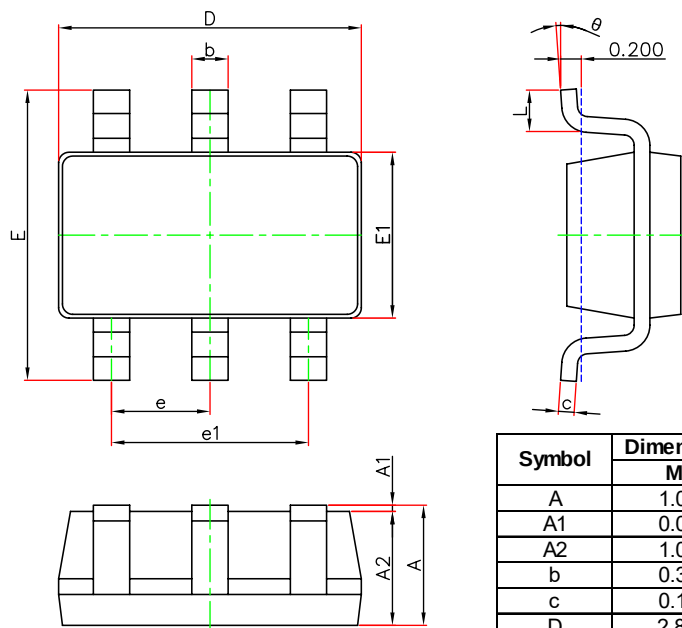

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E1	1.500	1.700	0.059	0.067
E	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

SOT-23-6L Suggested Pad Layout

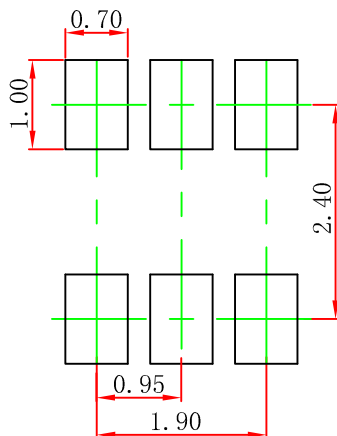

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: ± 0.05 mm.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

SOT-23-6L Tape and Reel


SOT-23-6L Embossed Carrier Tape

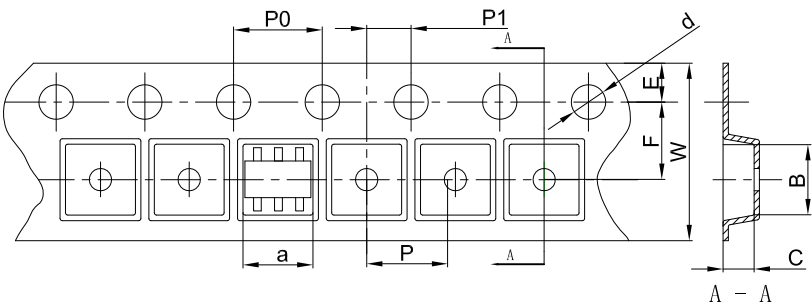


Packaging Description:
SOT-23-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
SOT-23-6L	3.23	3.17	1.37	Ø1.55	1.75	3.50	4.00	4.00	2.00	8.00

SOT-23-6L Tape Leader and Trailer

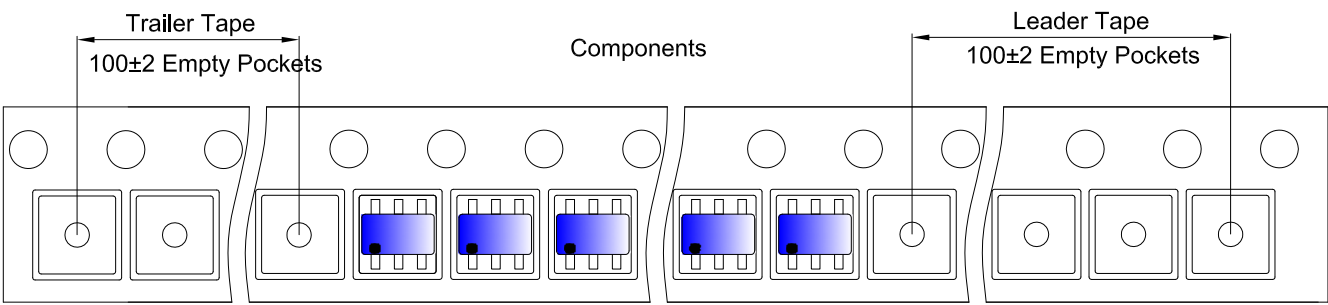

SOT-23-6L Reel

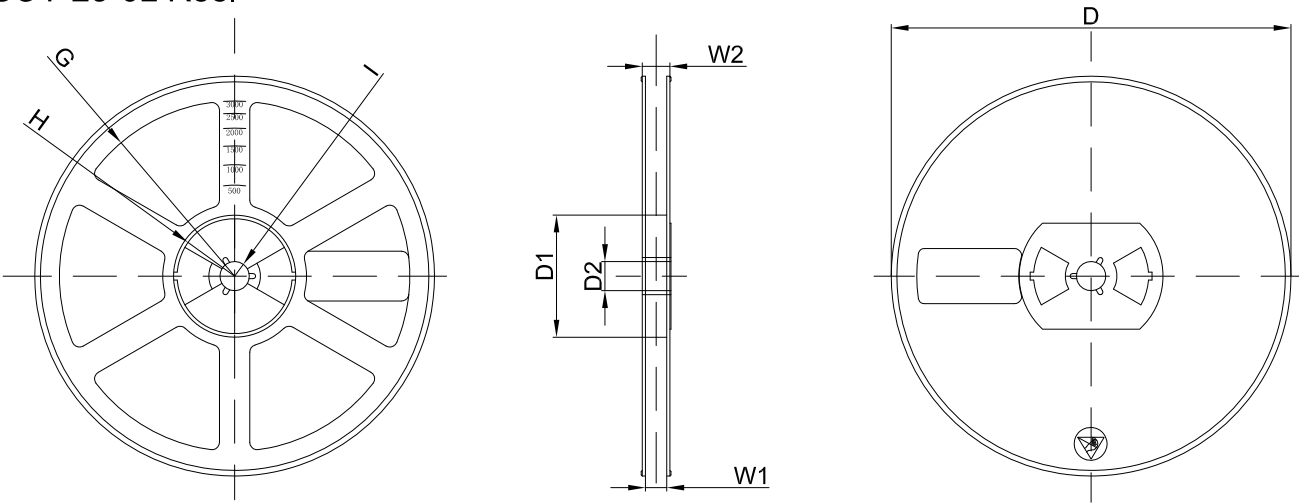

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	