

F

E

D

C

B

A

F

E

D

C

B

A

1

2

3

4

5

6

7

8

9


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
03	△3	依業務要求增加膠紙配方.	2013.01.30	李芳忠
04	△4	依實物變更CAP尺寸	2014.04.12	李芳忠
05	△5	依業務要求變更尺寸公差	2015.08.05	馮國東
06	△6	依業務要求增加底插式Layout	2017.01.23	馮國東

Specifications
Current Rating:3Amp
Insulation Resistance:1000MΩMin.
Dielectric Withstanding Voltage:600VAC
Contact Resistance:20mΩMax.
Operating Temperature:-40°C to +105°C
Materials

Contact Material:Phosphor Bronze
Insulator Material:High Temperature
Thermoplastic, UL 94V-0 Nylon 6T(Halogen Free)
or the equivalent material
All materials must meet Greenconn
hazardous substances control standards.



Recommended P.C.Board
Layout

(Tolerance:±0.05)

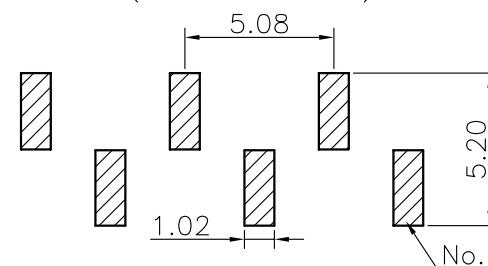



Recommended P.C.Board
Bottom Entry Layout

(Tolerance:±0.05)

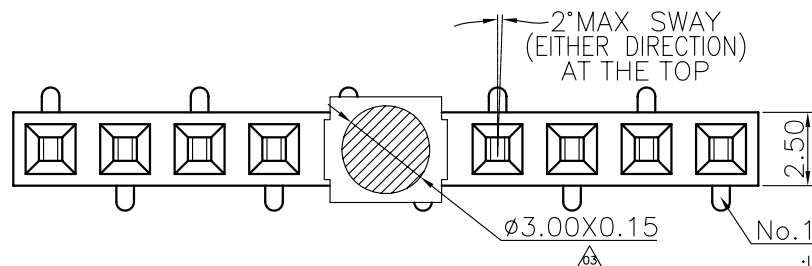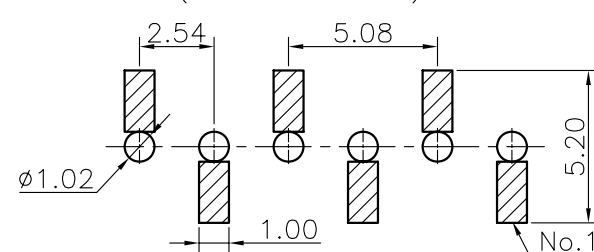

acetate tape

△3

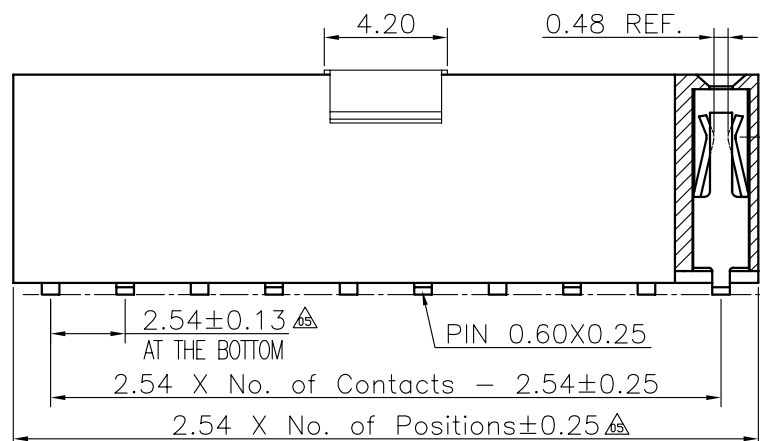

Ordering Information

C SHC121- XX XX A 001 R 1 A X

No. of Pins per Row
02~40

Standard Plating
01=Tin
Selective Plating
02=Gold Flash
05=Gold Flash/Tin

Color
1=Black

Standard Packing
C=Tube
Selective Packing
A=Box
F=Cap+Tape&Ree
G=Acetate Tape+Tube
H=Acetate Tape+Tape&Reel

格菱股份有限公司
Greenconn Corporation

GENERAL TOLERANCE

X.*±5.0°	X.±0.30
.X*±3.0°	.X±0.25
.XX*±2.0°	.XX±0.15
.XXX*±1.0°	.XXX±0.10

DESIGNED: 馮國東

DATE: 2017.01.23

CHECKED: 曹 熙

DATE: 2017.01.23

CO SIGNED: 劉北平

DATE: 2017.01.23

APPROVED: 李 輝

DATE: 2017.01.23

DWG. NO.

CSHC121-CA1RA

PART NO.

CSHC121-XXXX A001R1AX

TITLE.

2.54 FEMALE HEADER
SINGLE ROW SMT TYPE
BASE 7.10H

1

2

3

4

5

6

7

8

9