
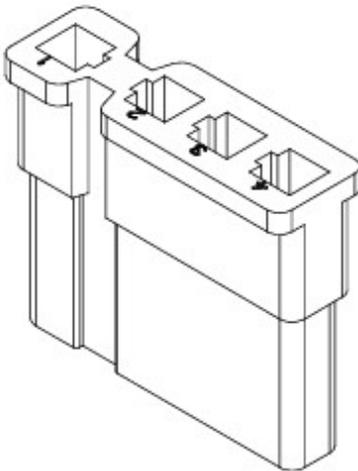




RoHS Compliance

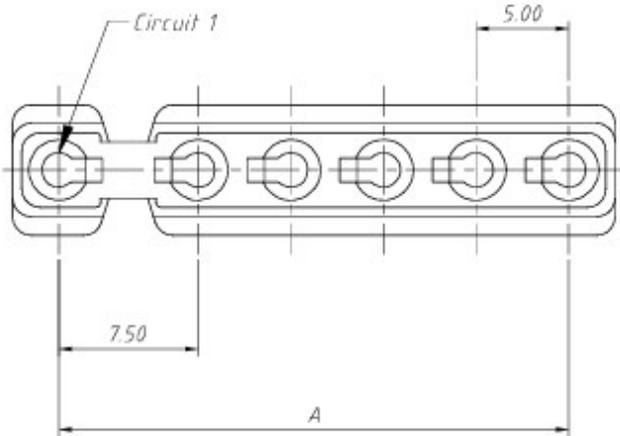

**Material:**  
Housing: PA66, UL94 V-0

**Electrical Characteristics:**  
Rated Current: 7.0AMP  
Voltage rating: 250V AC, DC  
Temperature range: -25°C ~ +85°C  
Insulator Resistance: 1000MΩ Min  
Withstand Voltage: 1500V AC/DC  
Contact Resistance: 10mΩ Max

Pin	Dimensions (mm)	
	A	B
01	---	5.00
02	7.50	12.50
03	12.50	17.50
04	17.50	22.50
05	22.50	27.50
06	27.50	32.50

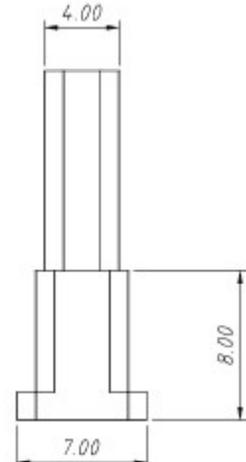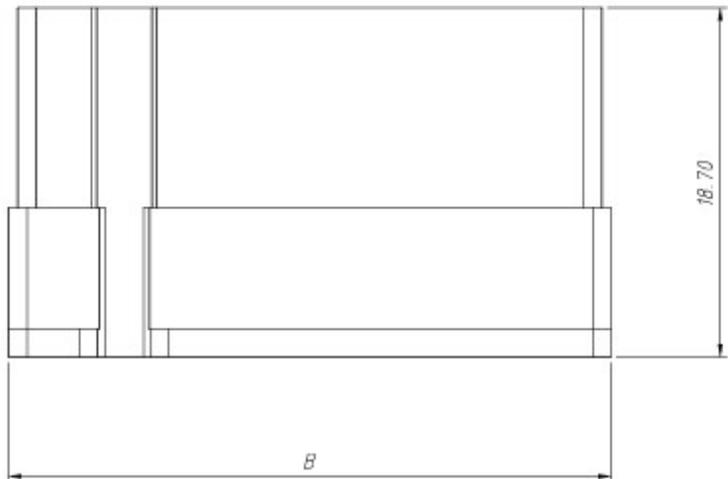

ANGLE TOLERANCE	PROJECTION	Description:		
±3°		7.50mm Pitch Wire To Board Connector		
GENERAL TOLERANCE	UNITS	mm	P/N:	ACHxx-CT
x.x ±0.30	SHEET SIZE	A4		
x.xx ±0.20	Draw:	Daniel	2021-01-11	<b>CONNTERM CO.,LTD.</b>
x.xxx ±0.10	Check:	Daniel	2021-01-11	