

Data Sheet | Item Number: 733-107/037-000



1-conductor female connector; CAGE CLAMP®; 0.5 mm²; Pin spacing 2.5 mm; 7-po-
le; 100% protected against mismating; Lateral locking levers; light gray

<https://www.wago.com/733-107/037-000>



Color: ■ light gray

Similar to illustration

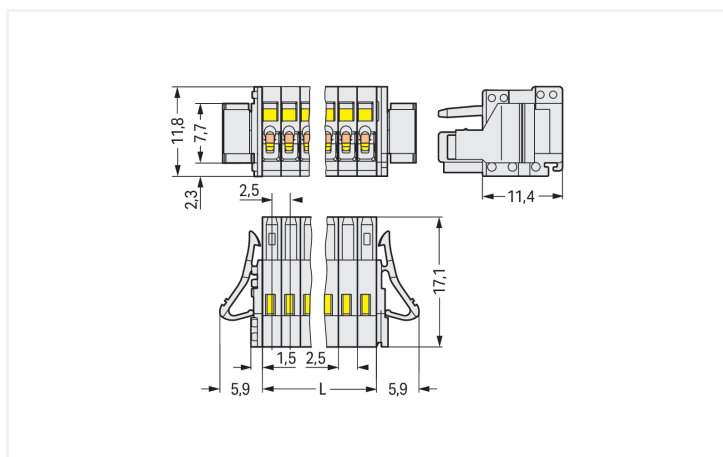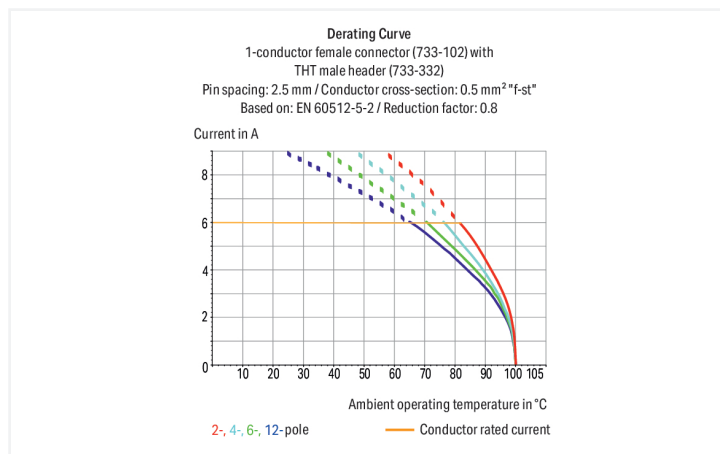

Dimensions in mm

L = pole no. x pin spacing

Female connector, 733 Series, 0 ° conductor exit to connection direction

Enjoy convenient electrical installations with this female connector (item number 733-107/037-000). Strip lengths must be between 5 and 6 mm when connecting conductors to this female connector. Featuring one conductor terminal along with CAGE CLAMP®, this product delivers reliable performance. Our tried-and-tested universal connection known as CAGE CLAMP® leads the way when it comes to connection technology and electrical interconnections. The item's dimensions are (29.3 x 11.8 x 17.1) mm (width x height x depth). Depending on the type of conductor, this female connector is designed for conductor cross sections ranging from 0.08 mm² to 0.5 mm².

Tin is used for coating the contact surfaces.



Notes	
Safety Information	The MCS – MULTI CONNECTION SYSTEM includes connectors without breaking capacity in accordance with DIN EN 61984. When used as intended, these connectors must not be connected/disconnected when live or under load. When used as intended, these connectors must not be connected/disconnected when live or under load. The circuit design should ensure header pins, which can be touched, are not live when unmated.
Variants:	Other pole numbers Gold-plated or partially gold-plated contact surfaces Other versions (or variants) can be requested from WAGO Sales or configured at https://configurator.wago.com/ .

Electrical data				
Ratings per		IEC/EN 60664-1		
Overvoltage category		III	III	II
Pollution degree		3	2	2
Nominal voltage		100 V	160 V	320 V
Rated impulse withstand voltage		2.5 kV	2.5 kV	2.5 kV
Rated current		6 A	6 A	6 A
Approvals per		UL 1059		
Use group		B	C	D
Rated voltage		150 V	-	-
Rated current		4 A	-	-
Approvals per		CSA		
Use group		B	C	D
Rated voltage		150 V	-	-
Rated current		4 A	-	-

Connection Data		
Clamping units	7	Connection 1 Connection technology CAGE CLAMP® Actuation type Operating tool Actuation direction 1 Operation parallel to conductor entry Actuation direction 2 Operation perpendicular to conductor entry Solid conductor 0.08 ... 0.5 mm² / 28 ... 20 AWG Fine-stranded conductor 0.08 ... 0.5 mm² / 28 ... 20 AWG Fine-stranded conductor; with insulated ferrule 0.25 ... 0.34 mm² Fine-stranded conductor; with uninsulated ferrule 0.25 ... 0.34 mm² Strip length 5 ... 6 mm / 0.2 ... 0.24 inches Pole number 7 Conductor entry direction to mating direction 0°

Physical data	
Pin spacing	2.5 mm / 0.098 inches
Width	29.3 mm / 1.154 inches
Height	11.8 mm / 0.465 inches
Depth	17.1 mm / 0.673 inches



Mechanical data																																										
Variable coding		Yes																																								
Anti-rotation protection		Yes																																								
Plug-in connection																																										
Contact type (pluggable connector)		Female connector/socket																																								
Connector (connection type)		for conductor																																								
Mismating protection		Yes																																								
Locking of plug-in connection		Locking lever																																								
Material data																																										
Note (material data)		Information on material specifications can be found here																																								
Color		light gray																																								
Material group		I																																								
Insulation material (main housing)		Polyamide (PA66)																																								
Flammability class per UL94		V0																																								
Clamping spring material		Chrome-nickel spring steel (CrNi)																																								
Contact material		Copper alloy																																								
Contact Plating		Tin																																								
Fire load		0.063 MJ																																								
Weight		3.5 g																																								
Environmental requirements																																										
Limit temperature range	-60 ... +100 °C	<table><tr><th colspan="2">Environmental Testing</th></tr><tr><td>Test specification: Railway applications – Rolling stock – Electronic equipment</td><td>DIN EN 50155 (VDE 0115-200):2022-06</td></tr><tr><td>Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests</td><td>DIN EN 61373 (VDE 0115-0106):2011-04</td></tr><tr><td>Spectrum/Mounting location</td><td>Service life test, Category 1, Class A/B</td></tr><tr><td>Functional test with noise-like oscillations</td><td>Test passed according to Section 8 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.101g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>10 min.</td></tr><tr><td>Test directions</td><td>X, Y and Z axes</td></tr><tr><td>Monitoring of contact faults and interruptions</td><td>Passed</td></tr><tr><td>Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Simulated service life test through increased levels of noise-like oscillations</td><td>Test passed according to Section 9 of the standard</td></tr><tr><td>Frequency</td><td>f₁ = 5 Hz to f₂ = 150 Hz</td></tr><tr><td>Acceleration</td><td>0.572g (highest test level used for all axes)</td></tr><tr><td>Test duration per axis</td><td>5 h</td></tr><tr><td>Test directions</td><td>X, Y and Z axes</td></tr><tr><td>Extended testing: Monitoring of contact faults and interruptions</td><td>Passed</td></tr><tr><td>Extended testing: Voltage drop measurement before and after each axis</td><td>Passed</td></tr><tr><td>Shock test</td><td>Test passed according to Section 10 of the standard</td></tr><tr><td>Shock pulse form</td><td>Half sine</td></tr></table>	Environmental Testing		Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06	Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04	Spectrum/Mounting location	Service life test, Category 1, Class A/B	Functional test with noise-like oscillations	Test passed according to Section 8 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.101g (highest test level used for all axes)	Test duration per axis	10 min.	Test directions	X, Y and Z axes	Monitoring of contact faults and interruptions	Passed	Voltage drop measurement before and after each axis	Passed	Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard	Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz	Acceleration	0.572g (highest test level used for all axes)	Test duration per axis	5 h	Test directions	X, Y and Z axes	Extended testing: Monitoring of contact faults and interruptions	Passed	Extended testing: Voltage drop measurement before and after each axis	Passed	Shock test	Test passed according to Section 10 of the standard	Shock pulse form	Half sine
Environmental Testing																																										
Test specification: Railway applications – Rolling stock – Electronic equipment	DIN EN 50155 (VDE 0115-200):2022-06																																									
Test procedure: Railway applications – Rolling stock equipment – Vibration and shock tests	DIN EN 61373 (VDE 0115-0106):2011-04																																									
Spectrum/Mounting location	Service life test, Category 1, Class A/B																																									
Functional test with noise-like oscillations	Test passed according to Section 8 of the standard																																									
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz																																									
Acceleration	0.101g (highest test level used for all axes)																																									
Test duration per axis	10 min.																																									
Test directions	X, Y and Z axes																																									
Monitoring of contact faults and interruptions	Passed																																									
Voltage drop measurement before and after each axis	Passed																																									
Simulated service life test through increased levels of noise-like oscillations	Test passed according to Section 9 of the standard																																									
Frequency	f ₁ = 5 Hz to f ₂ = 150 Hz																																									
Acceleration	0.572g (highest test level used for all axes)																																									
Test duration per axis	5 h																																									
Test directions	X, Y and Z axes																																									
Extended testing: Monitoring of contact faults and interruptions	Passed																																									
Extended testing: Voltage drop measurement before and after each axis	Passed																																									
Shock test	Test passed according to Section 10 of the standard																																									
Shock pulse form	Half sine																																									
Processing temperature	-35 ... +60 °C																																									



Environmental Testing	
Acceleration	5g (highest test level used for all axes)
Shock duration	30 ms
Number of shocks (per axis)	3 pos. und 3 neg.
Test directions	X, Y and Z axes
Extended testing: Monitoring of contact faults and interruptions	Passed
Extended testing: Voltage drop measurement before and after each axis	Passed
Vibration and shock stress for rolling stock equipment	Passed

Commercial data	
Product Group	3 (Multi Conn. System)
PU (SPU)	50 pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454215637
Customs tariff number	85366990990

Product Classification	
UNSPSC	39121409
eCl@ss 10.0	27-44-03-09
eCl@ss 9.0	27-44-03-09
ETIM 9.0	EC002638
ETIM 10.0	EC002638
ECCN	NO US CLASSIFICATION

Environmental Product Compliance	
RoHS Compliance Status	Compliant, No Exemption

Approvals / Certificates

Declarations of conformity and manufacturer's declarations

Approvals for marine applications



Approval	Standard	Certificate Name
Railway WAGO GmbH & Co. KG	-	Railway Ready



Approval	Standard	Certificate Name
BV Bureau Veritas S.A.	IEC 60998	11915/E0 BV



Downloads			
Environmental Product Compliance			
Compliance Search			
Environmental Product Compliance	733-107/037-000		

Documentation			
Additional Information			
Technical Section	03.04.2019	pdf 2027.26 KB	

CAD/CAE-Data			
CAD data		CAE data	
2D/3D Models	733-107/037-000	EPLAN Data Portal	733-107/037-000
		ZUKEN Portal	733-107/037-000

1 Compatible Products			
1.1 System counterpart			
1.1.1 Male connector/plug			



Item No.: 733-207 1-conductor male connector; CAGE CLAMP®; 0.5 mm²; Pin spacing 2.5 mm; 7-pole; 100% protected against mismatching; light gray	Item No.: 733-367 THT male header; 0.8 x 0.8 mm solder pin; angled; 100% protected against mismatching; Pin spacing 2.5 mm; 7-pole; light gray	Item No.: 733-337 THT male header; 0.8 x 0.8 mm solder pin; straight; 100% protected against mismatching; Pin spacing 2.5 mm; 7-pole; light gray
--	--	--

1.2 Optional Accessories			
1.2.1 Ferrule			
1.2.1.1 Ferrule			



Item No.: 216-321 Ferrule; Sleeve for 0.25 mm² / AWG 24; insulated; electro-tin plated; yellow	Item No.: 216-151 Ferrule; Sleeve for 0.25 mm² / AWG 24; uninsulated; electro-tin plated	Item No.: 216-322 Ferrule; Sleeve for 0.34 mm² / 22 AWG; insulated; electro-tin plated; light turquoise	Item No.: 216-152 Ferrule; Sleeve for 0.34 mm² / AWG 24; uninsulated; electro-tin plated
--	--	---	--



1.2.2 Marking

1.2.2.1 Marking strip



Item No.: 210-331/250-202
Marking strips; as a DIN A4 sheet; MARKED; 1-16 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-331/250-207
Marking strips; as a DIN A4 sheet; MARKED; 1-48 (100x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-331/250-204
Marking strips; as a DIN A4 sheet; MARKED; 17-32 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white



Item No.: 210-331/250-206
Marking strips; as a DIN A4 sheet; MARKED; 33-48 (400x); Height of marker strip: 2.3 mm/0.091 in; Strip length 182 mm; Horizontal marking; Self-adhesive; white

1.2.3 Strain relief

1.2.3.1 Strain relief plate



Item No.: 734-128
Strain relief plate; for female and male connectors; 12.5 mm wide; 1 part; Pin spacing 3.5 mm; light gray

1.2.4 Test and measurement

1.2.4.1 Testing accessories



Item No.: 735-500
WAGO Test pin; 1 mm Ø; 30 V AC / 60 V DC; CAT0; 1 A; 6 mm uninsulated; Test lead for soldering up to 0,5mm²

1.2.5 Tool

1.2.5.1 Operating tool



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a partially insulated shaft



Item No.: 210-251
Operating tool; for MCS MICRO and MINI with CAGE CLAMP® connection; yellow



Item No.: 233-335
Operating tool; green



Item No.: 233-331
Operating tool; insulated; yellow



Item No.: 733-130
Operating tool; made of insulating material; 1-way; loose; white




Item No.: 733-191
Operating tool; made of insulating material; 1-way; loose; yellow



Item No.: 233-332
Operating tool; made of insulating material; white

Installation Notes

Mismating protection




Male headers and female connectors are 100% protected against mismating. Only mating halves with the same pole number can be connected.



Conductor termination




Inserting conductor via (2.5 x 0.4) mm screwdriver – CAGE CLAMP® actuation perpendicular to conductor entry.



Conductor termination via screwdriver (233-335) – parallel to CAGE CLAMP® actuation



Conductor termination via operating tool (733-191)




Conductor termination via operating tool (210-251)

Coding




Coding a female connector – removing coding finger(s).

Marking



Strain relief



Strain relief plates for factory or in-the-field assembly

Testing




Testing via 1 mm Ø test pin (735-500), touch contact.

Locking system



Locking levers prevent accidental disconnection.



Locking levers prevent accidental disconnection.