


C-C310023101

Amphenol PCD SZ
ORIGINAL
PDF Format
R&D

REV	ECN	DESCRIPTION	DATE	MODIFIED
A	C2389	RELEASE	Aug-31-17	Luik.Peng
B	C2656	ADD WIRE RANGE		


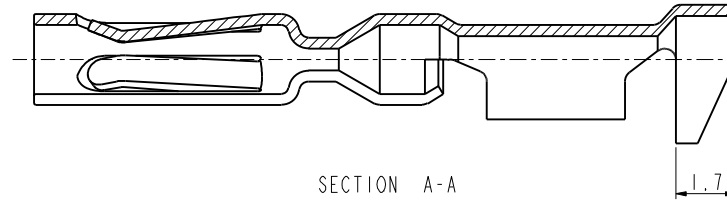


SECTION A-A

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen

受 控 文 件



2018 年 1月24日

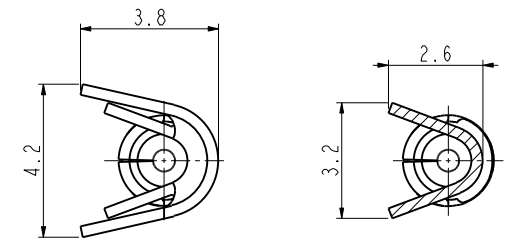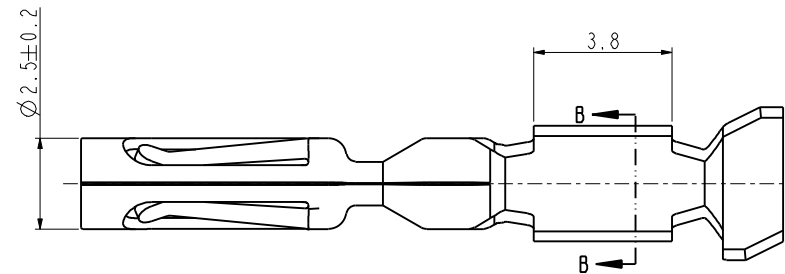

SECTION B-B



NOTES:

1. MATERIAL: COPPER ALLOY. 0.30 ± 0.01 MM THICKNESS.
2. PLATING: TIN PLATING.
3. WIRE RANGE: 22-14AWG ($0.35-2.0$ SQ MM),
WIRE INSULATION OD RANGE: 1.7-2.7MM.
4. ROHS COMPLIANCE.
5. REEL PACKAGE.

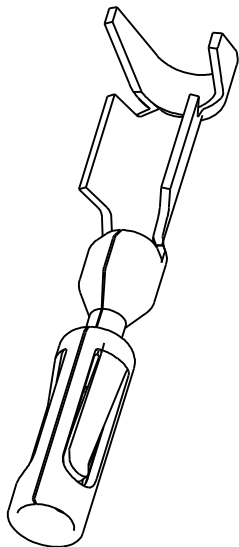

SCALE 6:1

DIMENSIONS	TOLERANCES	PROJECTION	Amphenol Pcd Shenzhen		TITLE				
ANSI Y14.5M	.X ±0.5		ENGR		LVRC SERIES FEMALE CONTACT				
UNITS: MM	.XX ±0.05		Luik.Peng Aug-31-17						
Pro/E FILE	ANGLES ±2.0°				SIZE	DWG NO.			REV
ORIGINAL	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD SHENZHEN		CHKD		A3	C-C310023101			B
			APPD						
							CODE: 58982	SCALE: 7:1	SHEET 1 OF 2

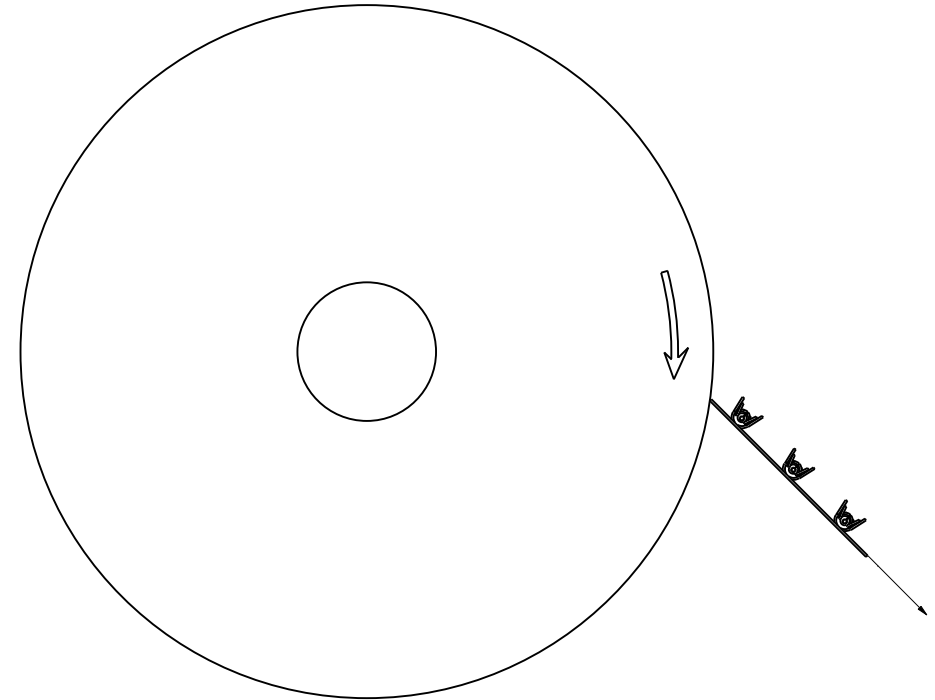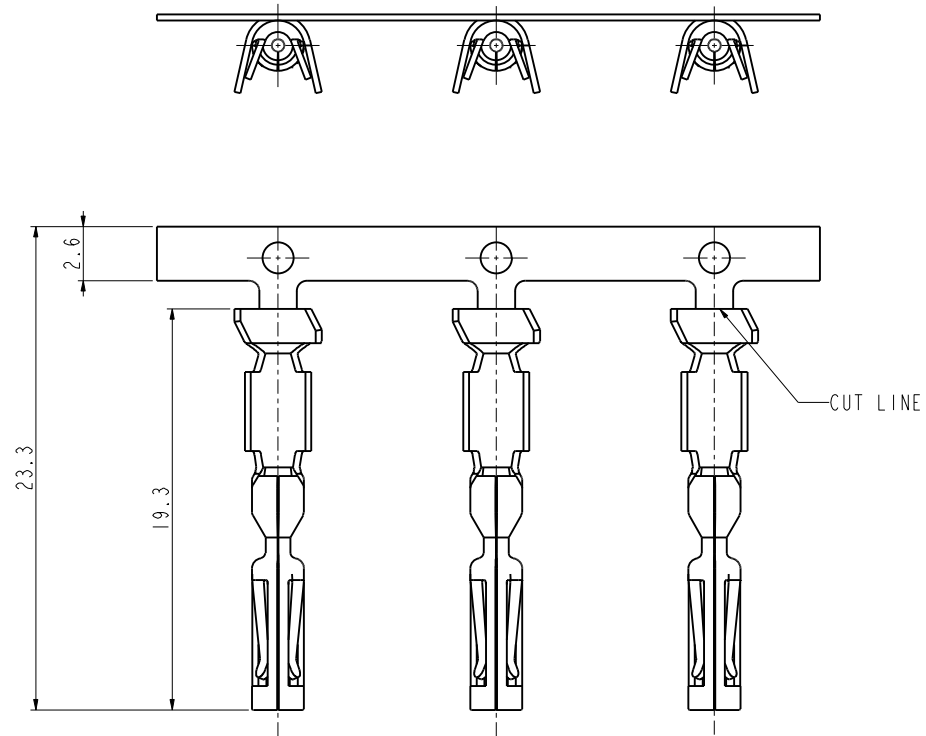

FEMALE CONTACT REEL PACKAGE

安费诺精密连接器(深圳)有限公司
Amphenol PCD Shenzhen

受 控 文 件

2018 年 1月24日

SIZE	DWG NO.	REV
A3	C-C310023101	B
CODE: 58982	SCALE: 4:1	SHEET 2 OF 2