


DC Brushless FAN 80x80x25mm-A Type




轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:85g(Weight:85g)

P@Q CURVE(AT RATEDVOLTAGE)

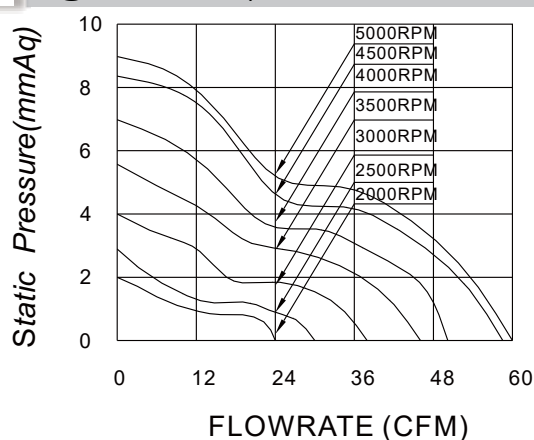

DIMENSIONS DRAWING(unit:mm)

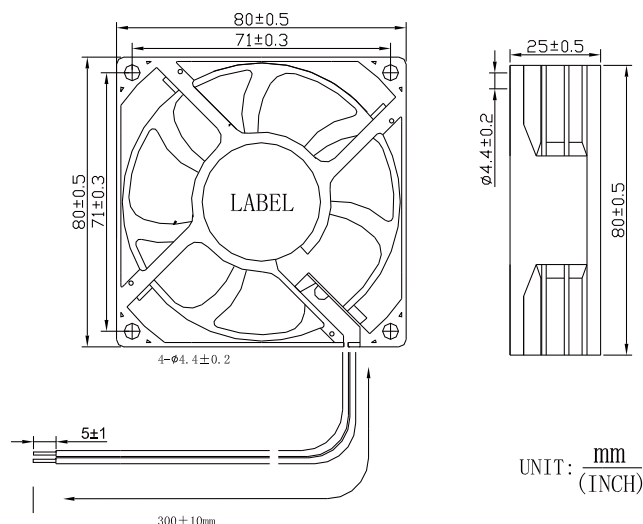

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12X; Extro P/N code is AY

X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)

Y means special function code, it will be used for a certain parts no. or client.

产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型,

S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)

Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG8025LL12X		12	7~13.5	0.08	0.96	2000	0.69	24.4	2.0	0.08	25.8
MG8025L12X		12	7~13.5	0.12	1.44	2500	0.89	31.4	2.8	0.11	29.1
MG8025M12X		12	7~13.5	0.15	1.8	3000	1.07	37.9	4.0	0.16	34.2
MG8025H12X		12	7~13.5	0.25	3.0	3500	1.25	44.3	5.3	0.21	36.9
MG8025HH12X		12	7~13.5	0.30	3.6	4000	1.44	50.8	7.0	0.28	41.8
MG8025VH12X		12	7~13.5	0.50	6.0	4500	1.63	57.6	8.5	0.33	45.4
MG8025HV12X		12	7~13.5	0.63	7.56	5000	1.71	60.5	8.9	0.35	46.3
MG8025M24X		24	18~26.5	0.08	1.92	3000	1.07	37.9	4.0	0.16	34.2
MG8025HH24X		24	18~26.5	0.16	3.84	4000	1.44	50.8	7.0	0.28	41.8
MG8025HV24X		24	18~26.5	0.32	7.68	5000	1.71	60.5	8.9	0.35	46.3
MG8025M48X		48	36~54	0.04	1.92	3000	1.07	37.9	4.0	0.16	34.2
MG8025HH48X		48	36~54	0.08	3.84	4000	1.44	50.8	7.0	0.28	41.8
MG8025HV48X		48	36~54	0.17	8.16	5000	1.71	60.5	8.9	0.35	46.3