

ZETTLER MAGNETICS

厦门赛特勒磁电有限公司



ZETTLER MAGNETICS INC
2410 BIRCH STREET
VISTA, CA 92081
Tel: 949-360-5938
Fax: 949-360-5839
E-Mail: sales@zettlermagnetics.com
Web: www.zettlermagnetics.com

ZETTLER CONTROLS INC
2410 BIRCH STREET
VISTA, CA 92081
Tel: 949-360-5840
Fax: 949-360-5639
E-Mail: sales@zettlercontrols.com
Web: www.zettlercontrols.com



ZETTLER ELECTRONICS
GmbH GERMANY
Am Wiesstrasse 3
82178 Puchheim
Germany
Tel: +49-8142-1570
Fax: +49-8142-1580
Web: www.zettler-electronics.de



ZETTLER ELECTRONICS
HK LTD
Unit 2A/Wing Tai Centre(Front Block)
No. 12 Hing Yip Street, Kwun Tong
Kwun Tong, Hong Kong
Tel: +852 2375 1288
Fax: +852 2375 7433
Web: www.zettlerhk.com



ZETTLER ELECTRONICS
NEDERLAND BV
Dennenstraat 1
4711 WA Zevenbergen
The Netherlands
Tel: +31 160 370 963
Fax: +31 160 371 048
Web: www.zettlerelectronics.nl



ZETTLER ELECTRONICS
POLAND sp. z o.o.
Osiedle Wysokich 40
59-700 Zary
Poland
Tel: +48 68 47 91 437
Fax: +48 68 47 91 430
Web: www.zettlerelectronics.pl




XIAMEN ZETTLER MAGNETICS CO., LTD
Ame Xu 5 Xinxing Road Haicang District
Xiamen, China
Tel: +86-592-2631598
Fax: +86-592-2631599
Email: sales@zettlercn.com
Web: www.zettlercn.com

厦门赛特勒磁电有限公司
福建省厦门市海沧区新营路5号
电话: +86-592-2631598
传真: +86-592-2631599
邮箱: sales@zettlercn.com
网址: www.zettlercn.com

ZETTLER MAGNETICS

变压器 | TRANSFORMERS

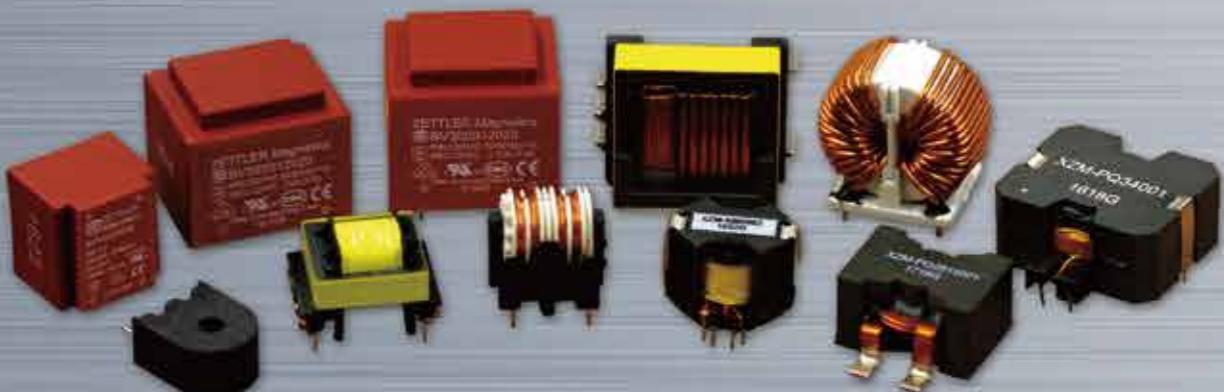

ZETTLER MAGNETICS

厦门赛特勒磁电有限公司

公司介绍 COMPANY PROFILE

赛特勒磁电公司作为专业从事电子变压器研发和生产的行业专家，我们始终以市场需求为导向，提供密封变压器、开关电源模块、高频变压器、低频变压器、电流互感器、环形变压器和工字型电感器等一系列产品，并着重于开发环保，高效，轻便，安全，经济的电源产品。我们的客户覆盖了许多全球知名家电、通讯、工业电子设备等领域的品牌。

实力雄厚、经验丰富的研发设计队伍使我们可以在最短的时间内完成对各种类型和规格的产品的设计和开发，并在性能符合各国认证要求的前提下满足不同客户的独特要求。公司绝大部分产品取得VDE、UL、CUL、CQC认证，符合EN61558、EN60950和UL1585、UL506标准。

同时，我们拥有特制的自动化设备、成功的生产运营管理经验、ISO9001质量管理体系认证等完善的质量控制模式和大型综合实验室以及ISO14001环境管理体系认证，能最大程度地保证我们产品生产工艺的稳定性和品质的可靠性。

As an dynamic and market-oriented industrial enterprise, Zettler Magnetics specializes in the development, engineering and production of environmentally friendly, safe, portable, highly efficient and economic power solutions - providing a wide range of transformer products including Encapsulated Power Transformers, Switch-Mode Power Supply Modules, Ferrite Switching Transformers, Laminated Transformers, Current Sensor Transformers, Toroidal Transformers, Drum Core Choke. We serve customers across the globe in many industries and application segments (such as Home Appliance, Communication, Industrial Electronic Products), including many well-known global brands.

Our experienced engineering team will complete even demanding custom product designs on short notice to meet customer specific requirements and comply with all pertinent safety standards. Most of our products carry the required VDE/UL/CUL/CQC approvals and are fully compliant with EN61558, EN60950, UL1585 and UL506.

Our production facilities are equipped with special-design automatic production lines, operated by a management team and staff with deep manufacturing experience, sophisticated quality assurance processes, ISO 9001 compliance, a comprehensive testing lab and in compliance with ISO14001.

典型应用 APPLICATION



CONTENTS 目录

ENCAPSULATED POWER TRANSFORMERS 密封变压器

01

- SURGE PROTECTED TRANSFORMER (SPT) 防雷击、浪涌冲击变压器 EI30-12.5/18
- EE20 MINI SERIES (0.3-0.6VA)
- EI30 SERIES (0.6-3.0VA)
- EI35 SERIES
- EI38 SERIES (2.4-4.0VA)
- EI42-14.6 SERIES (5.0VA)
- EI48-16.8 SERIES (10VA)

PFC MAIN CHOKES 电抗器

27

- EI3030 Series 20210128
- EI3035 Series 20210128
- EI4138 Series 20210128
- EI4140 Series 20210128

FERRITE TRANSFORMERS 高频变压器

35

- DESIGN REFERENCE OF FLYBACK SWITCHING TRANSFORMER 反激式开关变压器设计参考
- RECOMMENDED FOOT POSITION FOR POWER FREEITE SWITCHING TRANSFORMERS 常用脚位推荐
- E16 XZM-E16710—XZM—E16712
- E19 XZM-E19100—XZM—E19102
- E20 XZM-EF2050—XZM—EF2052
- E25 XZM-E25100—XZM—E25101
- ERL28 XZM-EC2850
- ETD29 XZM-ED2950
- ETD34 XZM-ED3450
- ETD39 XZM-ED3950
- ETD44 XZM-ED4450
- DC TO AC HIGH INSULATION AND STEP-UP TRANSFORMER 直流转交流高绝缘、升压变压器

COMMON MODE CHOKES FOR EMI SUPPRESSION 共模电感器

49

- E25 XZM-E25102-XZM-E25107
- U9.8 Series 20210128
- U10.5 Series 20210128
- U16 Series 20210128
- UC12 Series 20191217
- UC15 Series 20191217
- UC19 Series 20191227
- UC24 Series 20191220

DRUM CORE CHOKES 工字型电感器

67

CURRENT SENSOR TRANSFORMER 电流互感器

69

- ACST-200 SERIES

HIGH PRECISION CURRENT SENSOR TRANSFORMER 高精度电流互感器

70

LAMINATED TRANSFORMERS 低频变压器

72

- AH/ADH SERIES (1.1VA, 2.4VA, 6.0VA, 12.0VA, 20.0VA)
- AHI SERIES (2.5VA, 5.0VA, 10.0VA)
- AHF SERIES (2.4VA, 6.0VA, 12.0VA)
- AHR SERIES (30-50VA)

TOROIDAL TRANSFORMERS 环形变压器

80

TECHNICAL INFORMATION 技术信息

● RATED PRIMARY VOLTAGE(V) 初级额定电压

This is the supply voltage assigned to the transformer by the manufacturer.
生产厂家规定的变压器初级的工作电压。


● RATED SECONDARY VOLTAGE(V) 次级额定输出电压

This is the secondary output voltage assigned to the transformer when supplied with the rated primary voltage,frequency range, rated secondary current,all assigned by the manufacturer for the specified operating conditions of the transformer.
变压器生产厂家规定的变压器在额定初级输入电压, 额定初级频率, 额定的次级带载电流等特定条件下的变压器次级输出出电压。

● RATED POWER(VA) 额定功率

The specified power levels in this catalogue are the secondary power levels,in other words,those available when the transformer is loaded.It is the product of the RMS rated secondary voltage by the RMS rated current.If the transformer has more than one output winding,the rated power denotes the maximum sum of the products of RMS rated secondary voltage by the RMS rated secondary current,respectively.This rated power is defined for rated ambient temperature conditions.

额定功率代表变压器在低于或等于额定的环境温度条件下的次级带载时的输出功率, 为次级绕组的电压有效值乘以电流有效值; 如有多个绕组, 则是各绕组的电压有效值与电流有效值的乘积之和。

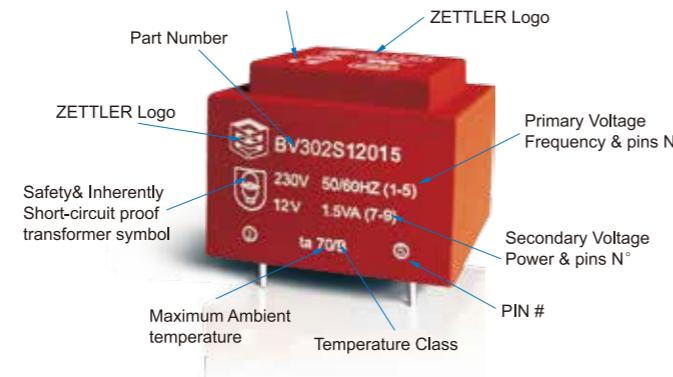

● AMBIENT TEMPERATURE(TA) 环境温度

The maximum temperature at which the transformer may be operated continuously under nominal conditions of use.It is the air temperature measured close to the transformer after thermal stabilization when operating at rated conditions.

在正常条件下, 变压器持续工作时的最高环境温度, 即测试变压器在额定负条件下工作到热平衡(稳态)时的变压器周围的环境温度。

● PARTICULAR POINTS OF EN 61558-2-6 STANDARD FOR SAFETY TRANSFORMERS 安全变压器的相关细节

On-load secondary voltage tolerance.

次级带载输出电压的公差

This should not differ from the rated value by more than:

此数值必须满足下面的规定

10% for transformers with build-in resistance to short-circuits (a supplement of 5% is granted on the 2nd secondary for transformers with 2 secondaries).

5% for other transformers whatever the secondaries number.

①.10%—针对固有短路保护变压器一个绕组

②.5%—针对固有短路保护变压器的其它绕组(多于一个输出绕组时)

③.5%—针对其它类型的变压器(不管输出绕组数目的多少)

Off-load secondary voltage. 次级空载电压

The values given in this catalogue are maximum theoretical values.

本目录所列到的电压为最大的理论值



ORDERING CODE 命名规则

BV	XX	2	S	15	010
Sealed Transformer					
EI Lamination Size Example	20,30,38,42,48,54,60,66				
Input V 1=115V 2=230V					
Output Type S=Single D=Dual					
Output Voltage 06=6V 09=9V 12=12V, etc.					
010=1VA 015=1.5VA 300=30VA, etc.					

SURGE PROTECTED TRANSFORMER(SPT) 防雷击、浪涌冲击变压器

FEATURES


- Withstand 10KV surge test.
- MTBF can reach more than 3,000,000 hours
- Withstand the double 85 test 1000 hours
- Encapsulated Design Prevent dust and humidity
- Self-Extinguishing Plastic 94V-0
- High efficiency, Low Temperature Rise
- Dielectric Strength 4200VAC
- Class B (130°C) insulation material.
- Operating temperature from -40 °C to 70°C
- Storage temperature from -40 °C to 120°C
- Design according to IEC61588
- Custom design available

产品特点


- 可耐受10KV浪涌电压冲击
- MTBF可达3,000,000以上
- 可耐受双85测试1000小时
- 密封线路防水防尘
- 采用可自熄灭的94V-0塑料
- 低温升，高效率
- 双重绝缘耐压强度4200VAC
- Class B (130度) 绝缘材料
- 工作温度范围：-40°C ~ 70°C
- 储存温度范围：-40°C ~ 120°C
- 根据IEC61588 设计
- 可根据客户的要求进行订制



Open circuit voltage waveform
开路电压波形

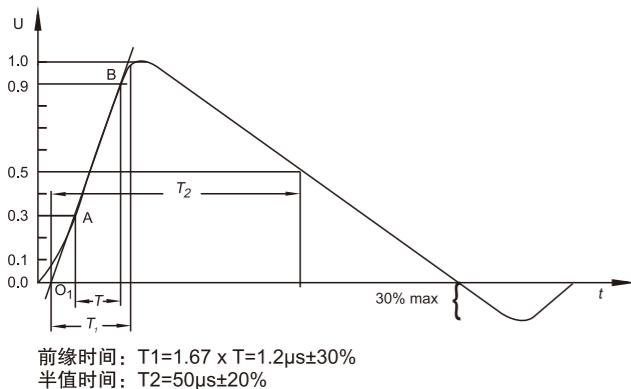

Short circuit current waveform
短路电流波形

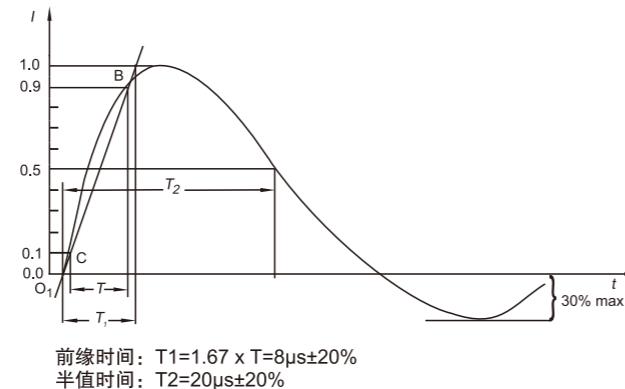

ADVANTAGES 优势


Item 项目	Gaseous Discharge tube 气体放电管	Varistor 压敏电阻	Transient diode 暂态抑制二极管	MSPT
Leakage current 泄漏电流	No/无	Less/小	Less/小	less/小
Follow current 续流	Ye/有	No/无	No/无	No/无
Stray capacitances 寄生电容	Small/小	Large/大	Large/大	No/无
Response time 响应时间	Slow/慢(us)	Fast/较快(ns)	Fast/快(ps)	Fast/快
Current range 通流容量	Large/大 1KA-100KA	large/大 0.1KA-100KA	Small/较小 0.1KA-1KA	N/A极小
Aging 老化现象	Yes/有	Yes/有	Little/几乎没有	No/极小
Damage type 损坏形式	Short /Open 短路或开路	Short /Open 短路或开路	Short /Open 短路或开路	Open开路
Clamp voltage 箱位电压	High/放电电压高	Middle/中等	Low/低	High/高

APPLICATION 适用场合


The MSPT is surge self-protection and high reliability power transformer, it can be widely used on Mountain Base Station, Car, Ship, AirCraft, Metering etc. that those applications is hard to grounding or requests high reliability.

高山电站，汽车，轮船，飞机等接地不便或不可靠的控制路，提供自带雷击浪涌保护的高可靠性电源变压器。

SURGE TEST SCHEMATIC 测试原理

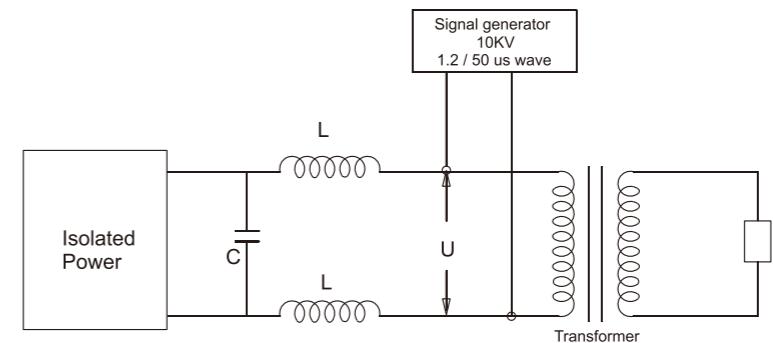

MECHANICAL SPECIFICATION 尺寸图

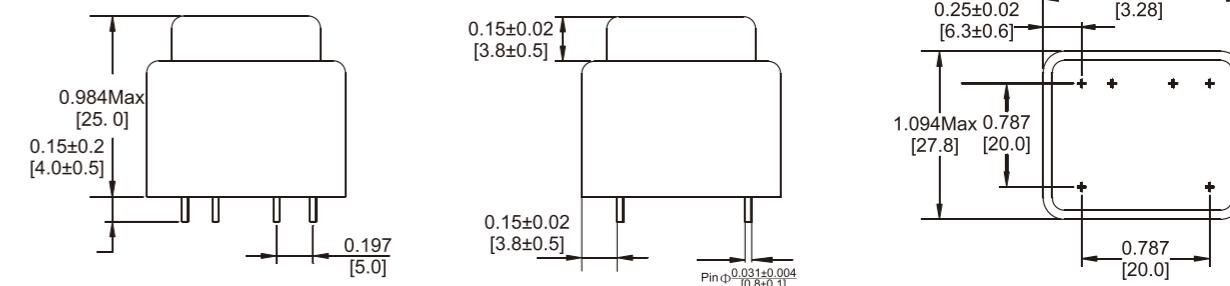

ELECTRICAL SPECIFICATION 电气规格

1.5VA EI30-12.5 SERIES

Order Number	Input Voltage(V)	SEC.Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP.(°C)	Surge Voltage	Height Dimension H(mm)	Weight(g)
HS301S06015	115V	6	250	1.5VA	10	T 70 B	10KV	25.0MAX	80
HS301S09015	115V	9	167	1.5VA	13.9	T 70 B	10KV	25.0MAX	80
HS301S10015	115V	10	150	1.5VA	14.9	T 70 B	10KV	25.0MAX	80
HS301S12015	115V	12	125	1.5VA	19.8	T 70 B	10KV	25.0MAX	80
HS301S15015	115V	15	100	1.5VA	24.9	T 70 B	10KV	25.0MAX	80
HS301S18015	115V	18	83	1.5VA	29.8	T 70 B	10KV	25.0MAX	80
HS301S24015	115V	24	63	1.5VA	40.5	T 70 B	10KV	25.0MAX	80
HS302S06015	230V	6	250	1.5VA	10	T 70 B	10KV	25.0MAX	80
HS302S10015	230V	9	167	1.5VA	13.9	T 70 B	10KV	25.0MAX	80
HS302S09015	230V	10	150	1.5VA	14.9	T 70 B	10KV	25.0MAX	80
HS302S12015	230V	12	125	1.5VA	19.8	T 70 B	10KV	25.0MAX	80
HS302S15015	230V	15	100	1.5VA	24.9	T 70 B	10KV	25.0MAX	80
HS302S18015	230V	18	83	1.5VA	29.8	T 70 B	10KV	25.0MAX	80
HS302S24015	230V	24	63	1.5VA	40.5	T 70 B	10KV	25.0MAX	80

ELECTRICAL SPECIFICATION 电气规格

2.0VA EI30-12.5 SERIES

Order Number	Input Voltage(V)	SEC.Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP.(°C)	Surge Voltage	Height Dimension H(mm)	Weight(g)
HS301S06020	115V	6	333	2.0VA	10.4	T 50 B	10KV	25.0MAX	80
HS301S09020	115V	9	222	2.0VA	14.5	T 50 B	10KV	25.0MAX	80
HS301S10020	115V	10	200	2.0VA	15.5	T 50 B	10KV	25.0MAX	80
HS301S12020	115V	12	167	2.0VA	20.7	T 50 B	10KV	25.0MAX	80
HS301S15020	115V	15	133	2.0VA	25.8	T 50 B	10KV	25.0MAX	80
HS301S18020	115V	18	111	2.0VA	30.8	T 50 B	10KV	25.0MAX	80
HS301S24020	115V	24	83	2.0VA	41.4	T 50 B	10KV	25.0MAX	80
HS302S06020	230V	6	333	2.0VA	10.4	T 50 B	10KV	25.0MAX	80
HS302S09020	230V	9	222	2.0VA	14.5	T 50 B	10KV	25.0MAX	80
HS302S10020	230V	10	200	2.0VA	15.5	T 50 B	10KV	25.0MAX	80
HS302S12020	230V	12	167	2.0VA	20.7	T 50 B	10KV	25.0MAX	80
HS302S15020	230V	15	133	2.0VA	25.8	T 50 B	10KV	25.0MAX	80
HS302S18020	230V	18	111	2.0VA	30.8	T 50 B	10KV	25.0MAX	80
HS302S24020	230V	24	83	2.0VA	41.4	T 50 B	10KV	25.0MAX	80



2.5VA EI30-18 SERIES

Order Number	Input Voltage(V)	SEC.Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP.(°C)	Surge Voltage	Height Dimension H(mm)	Weight(g)
HS301S06025	115V	6	417	2.5VA	10.4	T 50 B	10KV	29.8MAX	110
HS301S09025	115V	9	278	2.5VA	14.5	T 50 B	10KV	29.8MAX	110
HS301S10025	115V	10	250	2.5VA	15.5	T 50 B	10KV	29.8MAX	110
HS301S12025	115V	12	208	2.5VA	20.7	T 50 B	10KV	29.8MAX	110
HS301S15025	115V	15	167	2.5VA	25.8	T 50 B	10KV	29.8MAX	110
HS301S18025	115V	18	139	2.5VA	30.8	T 50 B	10KV	29.8MAX	110
HS301S24025	115V	24	104	2.5VA	41.4	T 50 B	10KV	29.8MAX	110
HS302S06025	230V	6	417	2.5VA	10.4	T 50 B	10KV	29.8MAX	110
HS302S09025	230V	9	278	2.5VA	14.5	T 50 B	10KV	29.8MAX	110
HS302S10025	230V	10	250	2.5VA	15.5	T 50 B	10KV	29.8MAX	110
HS302S12025	230V	12	208	2.5VA	20.7	T 50 B	10KV	29.8MAX	110
HS302S15025	230V	15	167	2.5VA	25.8	T 50 B	10KV	29.8MAX	110
HS302S18025	230V	18	139	2.5VA	30.8	T 50 B	10KV	29.8MAX	110
HS302S24025	230V	24	104	2.5VA	41.4	T 50 B	10KV	29.8MAX	110

2.3VA EI30-18 SERIES

Order Number	Input Voltage(V)	SEC.Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP.(°C)	Surge Voltage	Height Dimension H(mm)	Weight(g)
HS301S06023	115V	6	383	2.3VA	10.4	T 70 B	10KV	29.8MAX	110
HS301S09023	115V	9	256	2.3VA	14.5	T 70 B	10KV	29.8MAX	110
HS301S10023	115V	10	230	2.3VA	15.5	T 70 B	10KV	29.8MAX	110
HS301S12023	115V	12	192	2.3VA	20.7	T 70 B	10KV	29.8MAX	110
HS301S15023	115V	15	153	2.3VA	25.8	T 70 B	10KV	29.8MAX	110
HS301S18023	115V	18	128	2.3VA	30.8	T 70 B	10KV	29.8MAX	110
HS301S24023	115V	24	96	2.3VA	41.4	T 70 B	10KV	29.8MAX	110
HS302S06023	230V	6	383	2.3VA	10.4	T 70 B	10KV	29.8MAX	110
HS302S09023	230V	9	256	2.3VA	14.5	T 70 B	10KV	29.8MAX	110
HS302S10023	230V	10	230	2.3VA	15.5	T 70 B	10KV	29.8MAX	110
HS302S12023	230V	12	192	2.3VA	20.7	T 70 B	10KV	29.8MAX	110
HS302S15023	230V	15	153	2.3VA	25.8	T 70 B	10KV	29.8MAX	110
HS302S18023	230V	18	128	2.3VA	30.8	T 70 B	10KV	29.8MAX	110
HS302S24023	230V	24	96	2.3VA	41.4	T 70 B	10KV	29.8MAX	110

EI30 SERIES PACKAGING 包装规格

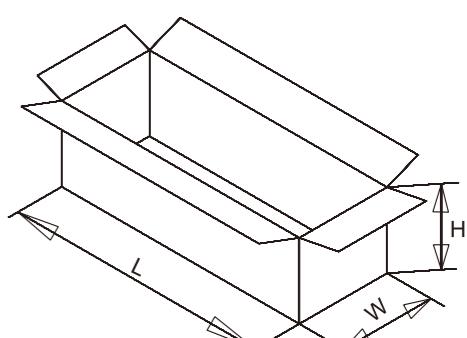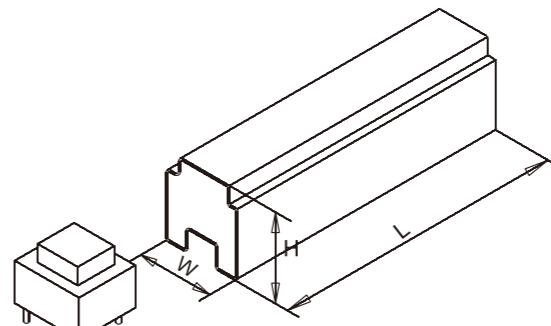

Model	Tube Size LXWXH(mm)	QTY (Per Tube)	Weight (Per Tube)
EI30-5 Series	510X31X26	15PCS	0.668kg
EI30-10.5 Series	510X31X32	15PCS	1.124kg
EI3012.5 Series	510X31X35	15PCS	1.275 kg
EI30-15.5 Series	510X31X38	15PCS	1.579 kg
EI30-18 Series	510X31X41	15PCS	1.733 kg

Model	Carton Outline LXWXH(mm)	QTY (Per Carton)	Weight (Per Carton)
EI30-5 Series	565X195X140	300PCS	13.5 kg
EI30-10.5 Series	565X195X140	225PCS	16.9 kg
EI3012.5 Series	565X195X130	150PCS	12.9 kg
EI30-15.5 Series	565X195X130	150PCS	15.9 kg
EI30-18 Series	565X195X140	150PCS	17.5 kg


EE20 MINI SERIES [0.3VA-0.6VA]

FEATURES


- VDE, UL5058-1,-2,-3,
UL file No. E214561 class2/3
VDE file No. 40032785
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
Input:230V 4200V
Input:115V 2800V
- Operation Frequency:50/60Hz
- Inherently Energy Limited
Resin Class B IEC 85
- (20,000 h Testing to IEC 216)
- Conforms to EN 61558 and UL5085
- 100% Production Tested

产品特点

- 通过VDE, UL5058-1,-2,-3,
UL认证号为: E214561 class2/3
VDE认证号为: 40032785
- 真空灌封
- 双槽胶芯设计
- UL94V-0自熄灭阻燃材料
- 介电强度
输入230V时: 4200Vrms
输入115V时: 2800Vrms
- 工作频率: 50/60Hz
- 固有能限设计
- 温度等级B级封胶
- (经过20000小时IEC 216测试)
- 符合EN61558 / UL5085
- 生产线全检

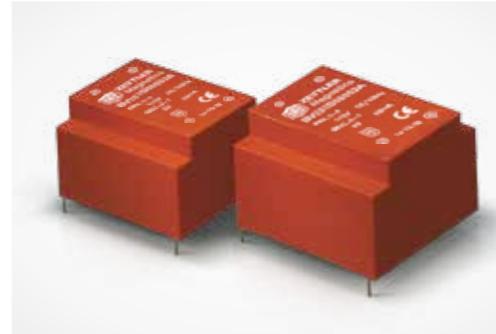


MECHANICAL SPECIFICATION 尺寸图

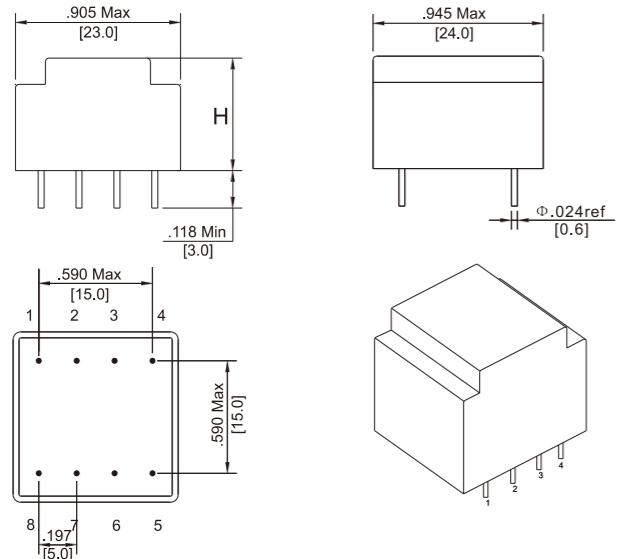


Recommended Drill Hole Diameter for Pins **0.039 inches**
1.0 mm


1 Secondary winding




2 Secondary windings



SCHEMATIC 原理图




Single output



Dual outputs

Bottom view



Recommended layout for transformers with
1 Secondary winding (allows the use of a
transformer with 2 secondary windings)

ELECTRICAL SPECIFICATIONS 电气规格

0.35VA EE20-6.2 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV201S06003A	115V	6	58	0.35	9.7	T 50 B	16.0MAX	29	●	●	
BV201S09003A	115V	9	38.9	0.35	14.7	T 50 B	16.0MAX	29	●	●	
BV201S10003A	115V	10	35	0.35	15.7	T 50 B	16.0MAX	29	●	●	
BV201S12003A	115V	12	29	0.35	20	T 50 B	16.0MAX	29	●	●	
BV201S15003A	115V	15	23.3	0.35	26.1	T 50 B	16.0MAX	29	●	●	
BV201S18003A	115V	18	19.4	0.35	31.3	T 50 B	16.0MAX	29	●	●	
BV201S24003A	115V	24	14.6	0.35	40.3	T 50 B	16.0MAX	29	●	●	
BV201D06003A	115V	2x6	2X29	0.35	2x9.7	T 50 B	16.0MAX	29	●	●	
BV201D09003A	115V	2x9	2X19.4	0.35	2x14.7	T 50 B	16.0MAX	29	●	●	
BV201D10003A	115V	2x10	2X17.5	0.35	2X15.7	T 50 B	16.0MAX	29	●	●	
BV201D12003A	115V	2x12	2X14.6	0.35	2x20	T 50 B	16.0MAX	29	●	●	
BV201D15003A	115V	2x15	2X11.7	0.35	2x26.1	T 50 B	16.0MAX	29	●	●	
BV201D18003A	115V	2x18	2X9.7	0.35	2X31.3	T 50 B	16.0MAX	29	●	●	
BV201D24003A	115V	2x24	2X7.3	0.35	2x40.3	T 50 B	16.0MAX	29	●	●	
BV202S06003A	230V	6	58	0.35	9.7	T 50 B	16.0MAX	29	●	●	●
BV202S09003A	230V	9	38.9	0.35	14.7	T 50 B	16.0MAX	29	●	●	●
BV202S10003A	230V	10	35	0.35	15.7	T 50 B	16.0MAX	29	●	●	●
BV202S12003A	230V	12	29	0.35	20	T 50 B	16.0MAX	29	●	●	●
BV202S15003A	230V	15	23.3	0.35	26.1	T 50 B	16.0MAX	29	●	●	●
BV202S18003A	230V	18	19.4	0.35	31.3	T 50 B	16.0MAX	29	●	●	●
BV202S24003A	230V	24	14.6	0.35	40.3	T 50 B	16.0MAX	29	●	●	●
BV202D06003A	230V	2x6	2X29	0.35	2x9.7	T 50 B	16.0MAX	29	●	●	●
BV202D09003A	230V	2x9	2X19.4	0.35	2x14.7	T 50 B	16.0MAX	29	●	●	●
BV202D10003A	230V	2x10	2X17.5	0.35	2X15.7	T 50 B	16.0MAX	29	●	●	●
BV202D12003A	230V	2x12	2X14.6	0.35	2x20	T 50 B	16.0MAX	29	●	●	●
BV202D15003A	230V	2x15	2X11.7	0.35	2x26.1	T 50 B	16.0MAX	29	●	●	●
BV202D18003A	230V	2x18	2X9.7	0.35	2X31.3	T 50 B	16.0MAX	29	●	●	●
BV202D24003A	230V	2x24	2X7.3	0.35	2x40.3	T 50 B	16.0MAX	29	●	●	●

0.5VA EE20-10.5 SERIES


Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV201S06005	115V	6	83.3	0.5	11V	T 50 B	19.5MAX	40	●	●	
BV201S09005	115V	9	55.6	0.5	16.5V	T 50 B	19.5MAX	40	●	●	
BV201S10005	115V	10	50	0.5	17.5V	T 50 B	19.5MAX	40	●	●	
BV201S12005	115V	12	41.7	0.5	20.6	T 50 B	19.5MAX	40	●	●	
BV201S15005	115V	15	33.3	0.5	26	T 50 B	19.5MAX	40	●	●	
BV201S18005	115V	18	27.8	0.5	30	T 50 B	19.5MAX	40	●	●	
BV201S24005	115V	24	20.8	0.5	41.1	T 50 B	19.5MAX	40	●	●	
BV201D06005	115V	2x6	2X41.7	0.5	2x10.9	T 50 B	19.5MAX	40	●	●	
BV201D09005	115V	2x9	2X27.8	0.5	2x16.4	T 50 B	19.5MAX	40	●	●	
BV201D10005	115V	2x10	2X25	0.5	2x17.4	T 50 B	19.5MAX	40	●	●	
BV201D12005	115V	2x12	2X20.8	0.5	2x20.6	T 50 B	19.5MAX	40	●	●	
BV201D15005	115V	2x15	2X16.7	0.5	2x25.8	T 50 B	19.5MAX	40	●	●	
BV201D18005	115V	2x18	2X13.9	0.5	2X29.5	T 50 B	19.5MAX	40	●	●	
BV201D24005	115V	2x24	2X10.4	0.5	2x40.5	T 50 B	19.5MAX	40	●	●	
BV202S06005	230V	6	83.3	0.5</td							

ELECTRICAL SPECIFICATIONS 电气规格

0.6VA EE20-10.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV201S06006	115V	6	100.0	0.6	11V	T 50 B	19.5MAX	40	●	●	
BV201S09006	115V	9	66.7	0.6	16.5V	T 50 B	19.5MAX	40	●	●	
BV201S10006	115V	10	60.0	0.6	17.6V	T 50 B	19.5MAX	40	●	●	
BV201S12006	115V	12	50.0	0.6	20.6	T 50 B	19.5MAX	40	●	●	
BV201S15006	115V	15	40.0	0.6	26	T 50 B	19.5MAX	40	●	●	
BV201S18006	115V	18	33.3	0.6	30	T 50 B	19.5MAX	40	●	●	
BV201S24006	115V	24	25.0	0.6	41.1	T 50 B	19.5MAX	40	●	●	
BV201D06006	115V	2x6	50.0	0.6	2x10.9	T 50 B	19.5MAX	40	●	●	
BV201D09006	115V	2x9	33.3	0.6	2x16.4	T 50 B	19.5MAX	40	●	●	
BV201D10006	115V	2X10	30.0	0.6	2X17.5	T 50 B	19.5MAX	40	●	●	
BV201D12006	115V	2x12	25.0	0.6	2x20.6	T 50 B	19.5MAX	40	●	●	
BV201D15006	115V	2x15	20.0	0.6	2x25.8	T 50 B	19.5MAX	40		●	
BV201D18006	115V	2x18	16.7	0.6	2X29.5	T 50 B	19.5MAX	40		●	
BV201D24006	115V	2x24	12.5	0.6	2x40.5	T 50 B	19.5MAX	40		●	
BV202S06006	230V	6	100.0	0.6	11V	T 50 B	19.5MAX	40	●	●	●
BV202S09006	230V	9	66.7	0.6	16.5V	T 50 B	19.5MAX	40	●	●	●
BV202S10006	230V	10	60.0	0.6	17.5V	T 50 B	19.5MAX	40	●	●	●
BV202S12006	230V	12	50.0	0.6	20.6	T 50 B	19.5MAX	40	●	●	●
BV202S15006	230V	15	40.0	0.6	26	T 50 B	19.5MAX	40	●	●	●
BV202S18006	230V	18	33.3	0.6	30	T 50 B	19.5MAX	40	●	●	●
BV202S24006	230V	24	25.0	0.6	41.1	T 50 B	19.5MAX	40	●	●	●
BV202D06006	230V	2x6	50.0	0.6	2x10.9	T 50 B	19.5MAX	40	●	●	●
BV202D09006	230V	2x9	33.3	0.6	2x16.4	T 50 B	19.5MAX	40	●	●	●
BV202D10006	230V	2X10	30.0	0.6	2X17.5	T 50 B	19.5MAX	40	●	●	●
BV202D12006	230V	2x12	25.0	0.6	2x20.6	T 50 B	19.5MAX	40	●	●	●
BV202D15006	230V	2x15	20.0	0.6	2x25.8	T 50 B	19.5MAX	40		●	
BV202D18006	230V	2x18	16.7	0.6	2X29.5	T 50 B	19.5MAX	40		●	
BV202D24006	230V	2x24	12.5	0.6	2x40.5	T 50 B	19.5MAX	40		●	

EE20 SERIES PACKAGING 包装规格

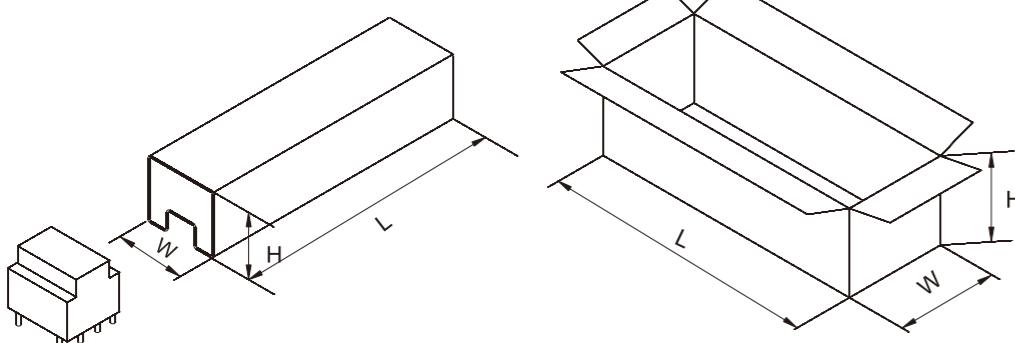

Model	Tube Size LXWXH(mm)	QTY (Per Tube)	Weight (Per Tube)
EE20-6.2 Series	510X31X26	20PCS	0.58kg
EE20-10.5 Series	510X31X32	20PCS	0.80kg

Model	Carton Outline LXWXH(mm)	QTY (Per Carton)	Weight (Per Carton)
EE20-6.2 Series	565X195X140	480PCS	14.3kg
EE20-10.5 Series	565X195X140	360PCS	14.1kg

EI30 SERIES [0.6VA-3.0VA]

FEATURES

- VDE,CUL,UL,CQC Approved:

UL file No. E214561,E177998

VDE file No. 40022230

CQC file No. CQC09001030821

- Vacuum Filling

- Split Bobbin Design

- Self-Extinguishing Plastics UL94V-0

- Dielectric Strength:

INPUT:230V 4200Vrms

INPUT:115V 2800Vrms

- Operation Frequency:50/60Hz

- Inherently Energy Limited

- Resin Class B IEC 85

(20,000 h Testing to IEC 216)

- Conforms to EN 61558/UL5085

- 100% Production Tested

* To be noted:2x18V and 2x24V models are non-VDE-approved, Those transformers meet all requirement of EN 61558-2-4.

The mark with ▲ are UL 5085-1,-2, Approved

The mark with ★ are UL 5085-1,-2,-3, Approved

产品特点

- 通过VDE,CUL,UL,CQC认证,

UL认证号为: E214561/E177998

VDE认证号为: 40022230

CQC认证号为: CQC09001030821

- 真空灌封

- 双槽胶芯设计

- UL94V-0自熄灭阻燃材料

- 介电强度

输入230V时: 4200Vrms

输入115V时: 2800Vrms

- 工作频率:50/60Hz

- 固有能限设计

- 温度等级B级封胶

(经过20000小时IEC 216测试)

- 符合EN61558/UL5085

- 生产线全检


* 注: 标记*的变压器(2X18V, 2X24V)

没有VDE认证, 但符合 EN61558-2-4标准的所有要求

标记▲通过UL5085-1,-2认证


标记★通过UL5085-1,-2,-3认证

SCHEMATIC 原理图



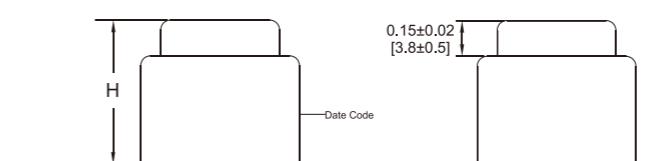


Recommended Drill Hole Diameter for Pins 0.051 inches
1.30mm

1 Secondary winding



2 Secondary windings



ELECTRICAL SPECIFICATIONS 电气规格

0.6VA EI30-5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06006	115V	6	100	0.6	10.5	T 70 B	15.7MAX	40	●	★	
BV301S09006	115V	9	66	0.6	15.5	T 70 B	15.7MAX	40	●	★	
BV301S10006	115V	10	60	0.6	15.5	T 70 B	15.7MAX	40	●	★	
BV301S12006	115V	12	50	0.6	20.5	T 70 B	15.7MAX	40	●	★	
BV301S15006	115V	15	40	0.6	25.4	T 70 B	15.7MAX	40	●	★	
BV301S18006	115V	18	33	0.6	30.4	T 70 B	15.7MAX	40	●	★	
BV301S24006	115V	24	25	0.6	40.4	T 70 B	15.7MAX	40	●	★	
BV301D06006	115V	2x6	2X50	0.6	2x10.5	T 70 B	15.7MAX	40	●	★	
BV301D09006	115V	2x9	2X33	0.6	2x15.5	T 70 B	15.7MAX	40	●	★	
BV301D10006	115V	2x10	2X30	0.6	2x15.5	T 70 B	15.7MAX	40	●	★	
BV301D12006	115V	2x12	2X25	0.6	2x20.5	T 70 B	15.7MAX	40	●	★	
BV301D15006	115V	2x15	2X20	0.6	2x25.0	T 70 B	15.7MAX	40	●	▲	
BV301D18006	115V	2x18	2X17	0.6	2x30.4	T 70 B	15.7MAX	40		▲	
BV301D24006	115V	2x24	2X12	0.6	2x40.4	T 70 B	15.7MAX	40		▲	
BV302S06006	230V	6	100	0.6	10.5	T 70 B	15.7MAX	40	●	★	●
BV302S09006	230V	9	66	0.6	15.5	T 70 B	15.7MAX	40	●	★	●
BV302S10006	230V	10	60	0.6	15.5	T 70 B	15.7MAX	40	●	★	●
BV302S12006	230V	12	50	0.6	20.5	T 70 B	15.7MAX	40	●	★	●
BV302S15006	230V	15	40	0.6	25.4	T 70 B	15.7MAX	40	●	★	●
BV302S18006	230V	18	33	0.6	30.4	T 70 B	15.7MAX	40	●	★	●
BV302S24006	230V	24	25	0.6	40.4	T 70 B	15.7MAX	40	●	★	●
BV302D06006	230V	2x6	2X50	0.6	2x10.5	T 70 B	15.7MAX	40	●	★	●
BV302D09006	230V	2x9	2X33	0.6	2x15.5	T 70 B	15.7MAX	40	●	★	●
BV302D10006	230V	2x10	2X30	0.6	2x15.5	T 70 B	15.7MAX	40	●	★	●
BV302D12006	230V	2x12	2X25	0.6	2x20.5	T 70 B	15.7MAX	40	●	★	●
BV302D15006	230V	2x15	2X20	0.6	2x25.0	T 70 B	15.7MAX	40	●	▲	●
BV302D18006	230V	2x18	2X17	0.6	2x30.4	T 70 B	15.7MAX	40		▲	
BV302D24006	230V	2x24	2X12	0.6	2x40.4	T 70 B	15.7MAX	40		▲	

1.0VA EI30-10.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06010	115V	6	167	1	8.6	T 70 B	22.3MAX	70	●	★	
BV301S09010	115V	9	111	1	12.9	T 70 B	22.3MAX	70	●	★	
BV301S10010	115V	10	100	1	12.9	T 70 B	22.3MAX	70	●	★	
BV301S12010	115V	12	83	1	17.2	T 70 B	22.3MAX	70	●	★	
BV301S15010	115V	15	67	1	21.6	T 70 B	22.3MAX	70	●	★	
BV301S18010	115V	18	56	1	25.9	T 70 B	22.3MAX	70	●	★	
BV301S24010	115V	24	42	1	37.9	T 70 B	22.3MAX	70	●	★	
BV301D06010	115V	2x6	2x83	1	2X8.6	T 70 B	22.3MAX	70	●	★	
BV301D09010	115V	2x9	2x56	1	2X12.9	T 70 B	22.3MAX	70	●	★	
BV301D10010	115V	2x10	2x50	1	2X12.9	T 70 B	22.3MAX	70	●	★	
BV301D12010	115V	2x12	2x42	1	2X19	T 70 B	22.3MAX	70	●	▲	
BV301D15010	115V	2x15	2x33	1	2X23.6	T 70 B	22.3MAX	70	●	▲	
BV301D18010	115V	2x18	2x28	1	2X24.9	T 70 B	22.3MAX	70		▲	
BV301D24010	115V	2x24	2x21	1	2X37.9	T 70 B	22.3MAX	70		★	
BV302S06010	230V	6	167	1	8.6	T 70 B	22.3MAX	70	●	★	●
BV302S09010	230V	9	111	1	12.9	T 70 B	22.3MAX	70	●	★	●
BV302S10010	230V	10	100	1	12.9	T 70 B	22.3MAX	70	●	★	●
BV302S12010	230V	12	83	1	17.2	T 70 B	22.3MAX	70	●	★	●
BV302S15010	230V	15	67	1	21.6	T 70 B	22.3MAX	70	●	★	●
BV302S18010	230V	18	56	1	25.9	T 70 B	22.3MAX	70	●	★	●
BV302S24010	230V	24	42	1	37.9	T 70 B	22.3MAX	70	●	★	●
BV302D06010	230V	2x6	2x83	1	2X8.6	T 70 B	22.3MAX	70	●	★	●
BV302D09010	230V	2x9	2x56	1	2X12.9	T 70 B	22.3MAX	70	●	★	●
BV302D10010	230V	2x10	2x50	1	2X12.9	T 70 B	22.3MAX	70	●	★	●
BV302D12010	230V	2x12	2x42	1	2X19	T 70 B	22.3MAX	70	●	★	●
BV302D15010	230V	2x15	2x33	1	2X23.6	T 70 B	22.3MAX	70		▲	
BV302D18010	230V	2x18	2x28	1	2X24.9	T 70 B	22.3MAX	70		▲	
BV302D24010	230V	2x24	2x21	1	2X37.9	T 70 B	22.3MAX	70		▲	

1.2VA EI30-10.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
VDE	UL	CQC									

<tbl_r cells="12" ix="3" maxcspan="1" maxrspan="1" usedcols="

ELECTRICAL SPECIFICATIONS 电气规格

1.5VA EI30-12.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (VA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06015	115V	6	250	1.5	9.7	T 70 B	24.4MAX	80	●	★	
BV301S09015	115V	9	167	1.5	14.5	T 70 B	24.4MAX	80	●	★	
BV301S10015	115V	10	150	1.5	14.5	T 70 B	24.4MAX	80	●	★	
BV301S12015	115V	12	125	1.5	19.3	T 70 B	24.4MAX	80	●	★	
BV301S15015	115V	15	100	1.5	24.2	T 70 B	24.4MAX	80	●	★	
BV301S18015	115V	18	83	1.5	29.8	T 70 B	24.4MAX	80	●	★	
BV301S24015	115V	24	63	1.5	38.6	T 70 B	24.4MAX	80	●	★	
BV301D06015	115V	2x6	2x125	1.5	2X9.7	T 70 B	24.4MAX	80	●	★	
BV301D09015	115V	2x9	2x83	1.5	2X15.3	T 70 B	24.4MAX	80	●	★	
BV301D10015	115V	2x10	2x75	1.5	2X15.3	T 70 B	24.4MAX	80	●	★	
BV301D12015	115V	2x12	2x63	1.5	2X19.3	T 70 B	24.4MAX	80	●	★	
BV301D15015	115V	2x15	2x50	1.5	2X24.2	T 70 B	24.4MAX	80	●	★	
BV301D18015	115V	2x18	2x42	1.5	2X29	T 70 B	24.4MAX	80		▲	
BV301D24015	115V	2x24	2x31	1.5	2X38.6	T 70 B	24.4MAX	80		▲	
BV302S06015	230V	6	250	1.5	9.7	T 70 B	24.4MAX	80	●	★	●
BV302S09015	230V	9	167	1.5	14.5	T 70 B	24.4MAX	80	●	★	●
BV302S10015	230V	10	150	1.5	14.5	T 70 B	24.4MAX	80	●	★	●
BV302S12015	230V	12	125	1.5	19.3	T 70 B	24.4MAX	80	●	★	●
BV302S15015	230V	15	100	1.5	24.2	T 70 B	24.4MAX	80	●	★	●
BV302S18015	230V	18	83	1.5	29.8	T 70 B	24.4MAX	80	●	★	●
BV302S24015	230V	24	63	1.5	38.6	T 70 B	24.4MAX	80	●	★	●
BV302D06015	230V	2x6	2x125	1.5	2X9.7	T 70 B	24.4MAX	80	●	★	●
BV302D09015	230V	2x9	2x83	1.5	2X15.3	T 70 B	24.4MAX	80	●	★	●
BV302D10015	230V	2x10	2x75	1.5	2X15.3	T 70 B	24.4MAX	80	●	★	●
BV302D12015	230V	2x12	2x63	1.5	2X19.3	T 70 B	24.4MAX	80	●	★	●
BV302D15015	230V	2x15	2x50	1.5	2X24.2	T 70 B	24.4MAX	80	●	★	●
BV302D18015	230V	2x18	2x42	1.5	2X29	T 70 B	24.4MAX	80		▲	
BV302D24015	230V	2x24	2x31	1.5	2X38.6	T 70 B	24.4MAX	80		▲	

1.5VA EI30-10.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (VA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06015-006	115V	6	250	1.5	9.7	T 70 B	22.3MAX	80	●	★	
BV301S09015-006	115V	9	167	1.5	14.5	T 70 B	22.3MAX	80	●	★	
BV301S10015-006	115V	10	167	1.5	14.5	T 70 B	22.3MAX	80	●	★	
BV301S12015-006	115V	12	150	1.5	19.3	T 70 B	22.3MAX	80	●	★	
BV301S15015-006	115V	15	100	1.5	24.2	T 70 B	22.3MAX	80	●	★	
BV301S18015-006	115V	18	83	1.5	29.8	T 70 B	22.3MAX	80	●	★	
BV301S24015-006	115V	24	63	1.5	38.6	T 70 B	22.3MAX	80	●	★	
BV301D06015-006	115V	2x6	2x125	1.5	2X9.7	T 70 B	22.3MAX	80	●	★	
BV301D09015-006	115V	2x9	2x83	1.5	2X15.3	T 70 B	22.3MAX	80	●	★	
BV301D10015-006	115V	2x10	2x75	1.5	2X15.3	T 70 B	22.3MAX	80	●	★	
BV301D12015-006	115V	2x12	2x63	1.5	2X19.3	T 70 B	22.3MAX	80	●	★	
BV301D15015-006	115V	2x15	2x50	1.5	2X24.2	T 70 B	22.3MAX	80	●	★	
BV301D18015-006	115V	2x18	2x42	1.5	2X29	T 70 B	22.3MAX	80		▲	
BV301D24015-006	115V	2x24	2x31	1.5	2X38.6	T 70 B	22.3MAX	80		▲	
BV302S06015-006	230V	6	250	1.5	9.7	T 70 B	22.3MAX	80	●	★	●
BV302S09015-006	230V	9	167	1.5	14.5	T 70 B	22.3MAX	80	●	★	●
BV302S10015-006	230V	10	150	1.5	14.5	T 70 B	22.3MAX	80	●	★	●
BV302S12015-006	230V	12	125	1.5	19.3	T 70 B	22.3MAX	80	●	★	●
BV302S15015-006	230V	15	100	1.5	24.2	T 70 B	22.3MAX	80	●	★	●
BV302S18015-006	230V	18	83	1.5	29.8	T 70 B	22.3MAX	80	●	★	●
BV302S24015-006	230V	24	63	1.5	38.6	T 70 B	22.3MAX	80	●	★	●
BV302D06015-006	230V	2x6	2x125	1.5	2X9.7	T 70 B	22.3MAX	80	●	★	●
BV302D09015-006	230V	2x9	2x83	1.5	2X15.3	T 70 B	22.3MAX	80	●	★	●
BV302D10015-006	230V	2x10	2x75	1.5	2X15.3	T 70 B	22.3MAX	80	●	★	●
BV302D12015-006	230V	2x12	2x63	1.5	2X19.3	T 70 B	22.3MAX	80	●	★	●
BV302D15015-006	230V	2x15	2x50	1.5	2X24.2	T 70 B	22.3MAX	80	●	★	●
BV302D18015-006	230V	2x18	2x42	1.5	2X29	T 70 B	22.3MAX	80		▲	
BV302D24015-006	230V	2x24	2x31	1.5	2X38.6	T 70 B	22.3MAX	80		▲	

1.7VA EI30-12.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (

ELECTRICAL SPECIFICATIONS 电气规格

2.0VA EI30-15.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06020	115V	6	333	2	10.4	T 70 B	27.4MAX	100	●	★	
BV301S09020	115V	9	222	2	15.5	T 70 B	27.4MAX	100	●	★	
BV301S10020	115V	10	200	2	15.5	T 70 B	27.4MAX	100	●	★	
BV301S12020	115V	12	167	2	20.7	T 70 B	27.4MAX	100	●	★	
BV301S15020	115V	15	133	2	25.8	T 70 B	27.4MAX	100	●	★	
BV301S18020	115V	18	111	2	30.8	T 70 B	27.4MAX	100	●	★	
BV301S24020	115V	24	83	2	41.4	T 70 B	27.4MAX	100	●	★	
BV301D06020	115V	2x6	2x167	2	2X10.4	T 70 B	27.4MAX	100	●	★	
BV301D09020	115V	2x9	2x111	2	2X15.4	T 70 B	27.4MAX	100	●	★	
BV301D10020	115V	2x10	2x100	2	2X15.4	T 70 B	27.4MAX	100	●	★	
BV301D12020	115V	2x12	2x83	2	2X20.7	T 70 B	27.4MAX	100	●	★	
BV301D15020	115V	2x15	2x67	2	2X25.0	T 70 B	27.4MAX	100	●	★	
BV301D18020	115V	2x18	2x56	2	2X30.8	T 70 B	27.4MAX	100	▲		
BV301D24020	115V	2x24	2x42	2	2X41.4	T 70 B	27.4MAX	100	▲		
BV302S06020	230V	6	333	2	10.4	T 70 B	27.4MAX	100	●	★	●
BV302S09020	230V	9	222	2	15.5	T 70 B	27.4MAX	100	●	★	●
BV302S10020	230V	10	200	2	15.5	T 70 B	27.4MAX	100	●	★	●
BV302S12020	230V	12	167	2	20.7	T 70 B	27.4MAX	100	●	★	●
BV302S15020	230V	15	133	2	25.8	T 70 B	27.4MAX	100	●	★	●
BV302S18020	230V	18	111	2	30.8	T 70 B	27.4MAX	100	●	★	●
BV302S24020	230V	24	83	2	41.4	T 70 B	27.4MAX	100	●	★	●
BV302D06020	230V	2x6	2x167	2	2X10.4	T 70 B	27.4MAX	100	●	★	●
BV302D09020	230V	2x9	2x111	2	2X15.4	T 70 B	27.4MAX	100	●	★	●
BV302D10020	230V	2x10	2x100	2	2X15.4	T 70 B	27.4MAX	100	●	★	●
BV302D12020	230V	2x12	2x83	2	2X20.7	T 70 B	27.4MAX	100	●	★	●
BV302D15020	230V	2x15	2x67	2	2X25.0	T 70 B	27.4MAX	100	●	★	●
BV302D18020	230V	2x18	2x56	2	2X30.8	T 70 B	27.4MAX	100	▲		
BV302D24020	230V	2x24	2x42	2	2X41.4	T 70 B	27.4MAX	100	▲		

2.3VA EI30-15.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06023A	115V	6	383	2.3	10.5	T 40 B	27.4MAX	100	▲		
BV301S09023A	115V	9	256	2.3	15.5	T 40 B	27.4MAX	100	▲		
BV301S10023A	115V	10	230	2.3	15.5	T 40 B	27.4MAX	100	▲		
BV301S12023A	115V	12	192	2.3	20.7	T 40 B	27.4MAX	100	▲		
BV301S15023A	115V	15	153	2.3	25.8	T 40 B	27.4MAX	100	▲		
BV301S18023A	115V	18	125	2.3	30.8	T 40 B	27.4MAX	100	▲		
BV301S24023A	115V	24	96	2.3	41.4	T 40 B	27.4MAX	100	▲		
BV301D06023A	115V	2x6	2x192	2.3	2X10.4	T 40 B	27.4MAX	100	▲		
BV301D09023A	115V	2x9	2x128	2.3	2X15.4	T 40 B	27.4MAX	100	▲		
BV301D10023A	115V	2x10	2x115	2.3	2X15.4	T 40 B	27.4MAX	100	▲		
BV301D12023A	115V	2x12	2x96	2.3	2X20.7	T 40 B	27.4MAX	100	▲		
BV301D15023A	115V	2x15	2x77	2.3	2X25.0	T 40 B	27.4MAX	100	▲		
BV301D18023A	115V	2x18	2x64	2.3	2X30.8	T 40 B	27.4MAX	100	▲		
BV301D24023A	115V	2x24	2x48	2.3	2X41.4	T 40 B	27.4MAX	100	▲		
BV302S06023A	230V	6	383	2.3	10.5	T 40 B	27.4MAX	100	▲		
BV302S09023A	230V	9	256	2.3	15.5	T 40 B	27.4MAX	100	▲		
BV302S10023A	230V	10	230	2.3	15.5	T 40 B	27.4MAX	100	▲		
BV302S12023A	230V	12	192	2.3	20.7	T 40 B	27.4MAX	100	▲		
BV302S15023A	230V	15	153	2.3	25.8	T 40 B	27.4MAX	100	▲		
BV302S18023A	230V	18	125	2.3	30.8	T 40 B	27.4MAX	100	▲		
BV302S24023A	230V	24	96	2.3	41.4	T 40 B	27.4MAX	100	▲		
BV302D06023A	230V	2x6	2x192	2.3	2X10.4	T 40 B	27.4MAX	100	▲		
BV302D09023A	230V	2x9	2x128	2.3	2X15.4	T 40 B	27.4MAX	100	▲		
BV302D10023A	230V	2x10	2x115	2.3	2X15.4	T 40 B	27.4MAX	100	▲		
BV302D12023A	230V	2x12	2x96	2.3	2X20.7	T 40 B	27.4MAX	100	▲		
BV302D15023A	230V	2x15	2x77	2.3	2X25.0	T 40 B	27.4MAX	100	▲		
BV302D18023A	230V	2x18	2x64	2.3	2X30.8	T 40 B	27.4MAX	100	▲		
BV302D24023A	230V	2x24	2x48	2.3	2X41.4	T 40 B	27.4MAX	100	▲		

2.4VA EI30-15.5 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
VDE	UL	CQC									
<tbl_info cols="12

ELECTRICAL SPECIFICATIONS 电气规格

2.7VA EI30-18 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06027	115V	6	450	2.7	10.5	T 40 B	29.8MAX	110	▲		
BV301S09027	115V	9	300	2.7	15.4	T 40 B	29.8MAX	110	▲		
BV301S10027	115V	10	270	2.7	15.4	T 40 B	29.8MAX	110	▲		
BV301S12027	115V	12	225	2.7	21.1	T 40 B	29.8MAX	110	▲		
BV301S15027	115V	15	180	2.7	26.3	T 40 B	29.8MAX	110	▲		
BV301S18027	115V	18	150	2.7	30.9	T 40 B	29.8MAX	110	▲		
BV301S24027	115V	24	112.5	2.7	42.1	T 40 B	29.8MAX	110	▲		
BV301D06027	115V	2x6	2x225	2.7	2X10.5	T 40 B	29.8MAX	110	▲		
BV301D09027	115V	2x9	2x150	2.7	2X15.4	T 40 B	29.8MAX	110	▲		
BV301D10027	115V	2x10	2x135	2.7	2X15.4	T 40 B	29.8MAX	110	▲		
BV301D12027	115V	2x12	2x112.5	2.7	2X21.1	T 40 B	29.8MAX	110	▲		
BV301D15027	115V	2x15	2x90	2.7	2X25.0	T 40 B	29.8MAX	110	▲		
BV301D18027	115V	2x18	2x75	2.7	2X31.5	T 40 B	29.8MAX	110	▲		
BV301D24027	115V	2x24	2x56.25	2.7	2X42.1	T 40 B	29.8MAX	110	▲		
BV302S06027	230V	6	450	2.7	10.5	T 40 B	29.8MAX	110	▲		
BV302S09027	230V	9	300	2.7	15.4	T 40 B	29.8MAX	110	▲		
BV302S10027	230V	10	270	2.7	15.4	T 40 B	29.8MAX	110	▲		
BV302S12027	230V	12	225	2.7	21.1	T 40 B	29.8MAX	110	▲		
BV302S15027	230V	15	180	2.7	26.3	T 40 B	29.8MAX	110	▲		
BV302S18027	230V	18	150	2.7	30.9	T 40 B	29.8MAX	110	▲		
BV302S24027	230V	24	112.5	2.7	42.1	T 40 B	29.8MAX	110	▲		
BV302D06027	230V	2x6	2x225	2.7	2X10.5	T 40 B	29.8MAX	110	▲		
BV302D09027	230V	2x9	2x150	2.7	2X15.4	T 40 B	29.8MAX	110	▲		
BV302D10027	230V	2x10	2x135	2.7	2X15.4	T 40 B	29.8MAX	110	▲		
BV302D12027	230V	2x12	2x112.5	2.7	2X21.1	T 40 B	29.8MAX	110	▲		
BV302D15027	230V	2x15	2x90	2.7	2X25.0	T 40 B	29.8MAX	110	▲		
BV302D18027	230V	2x18	2x75	2.7	2X31.5	T 40 B	29.8MAX	110	▲		
BV302D24027	230V	2x24	2x56.25	2.7	2X42.1	T 40 B	29.8MAX	110	▲		

2.8VA EI30-23 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV301S06028A	115V	6	467	2.8	10.9	T 70 B	34.9MAX	120			
BV301S09028A	115V	9	311	2.8	16.2	T 70 B	34.9MAX	120			
BV301S10028A	115V	10	280	2.8	16.0	T 70 B	34.9MAX	120			
BV301S12028A	115V	12	233	2.8	21.8	T 70 B	34.9MAX	120			
BV301S15028A	115V	15	187	2.8	26.9	T 70 B	34.9MAX	120			
BV301S18028A	115V	18	156	2.8	30.9	T 70 B	34.9MAX	120			
BV301S24028A	115V	24	117	2.8	43.5	T 70 B	34.9MAX	120			
BV301D06028A	115V	2x6	2x233	2.8	2X10.9	T 70 B	34.9MAX	120			
BV301D09028A	115V	2x9	2x156	2.8	2X16.0	T 70 B	34.9MAX	120			
BV301D10028A	115V	2x10	2x140	2.8	2X16.0	T 70 B	34.9MAX	120			
BV301D12028A	115V	2x12	2x117	2.8	2X21.8	T 70 B	34.9MAX	120			
BV301D15028A	115V	2x15	2x93	2.8	2X25.0	T 70 B	34.9MAX	120			
BV301D18028A	115V	2x18	2x78	2.8	2X31.5	T 70 B	34.9MAX	120			
BV301D24028A	115V	2x24	2x58.5	2.8	2X43.5	T 70 B	34.9MAX	120			
BV302S06028A	230V	6	467	2.8	10.9	T 70 B	34.9MAX	120			
BV302S09028A	230V	9	311	2.8	16.0	T 70 B	34.9MAX	120			
BV302S10028A	230V	10	280	2.8	16.0	T 70 B	34.9MAX	120			
BV302S12028A	230V	12	233	2.8	21.8	T 70 B	34.9MAX	120			
BV302S15028A	230V	15	187	2.8	26.9	T 70 B	34.9MAX	120			
BV302S18028A	230V	18	156	2.8	30.9	T 70 B	34.9MAX	120			
BV302S24028A	230V	24	117	2.8	43.5	T 70 B	34.9MAX	120			
BV302D06028A	230V	2x6	2x233	2.8	2X10.9	T 70 B	34.9MAX	120			
BV302D09028A	230V	2x9	2x156	2.8	2X16.0	T 70 B	34.9MAX	120			
BV302D10028A	230V	2x10	2x140	2.8	2X16.0	T 70 B	34.9MAX	120			
BV302D12028A	230V	2x12	2x117	2.8	2X21.8	T 70 B	34.9MAX	120			
BV302D15028A	230V	2x15	2x93	2.8	2X25.0	T 70 B	34.9MAX	120			
BV302D18028A	230V	2x18	2x78	2.8	2X31.5	T 70 B	34.9MAX	120			
BV302D24028A	230V	2x24	2x58.5	2.8	2X43.5	T 70 B	34.9MAX	120			


3.0VA EI30-23 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate		
VDE	UL	CQC									

<tbl_r cells


EI35 SERIES

MECHANICAL SPECIFICATION 尺寸图

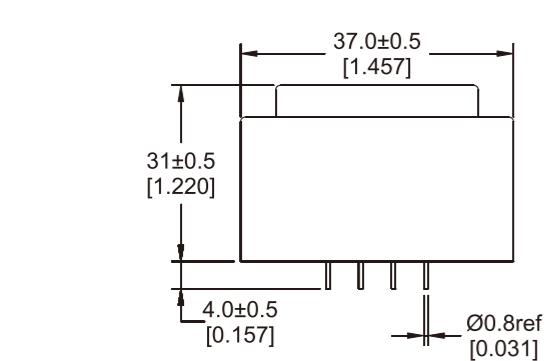

1 Secondary winding 2 Secondary windings

SCHEMATIC 原理图

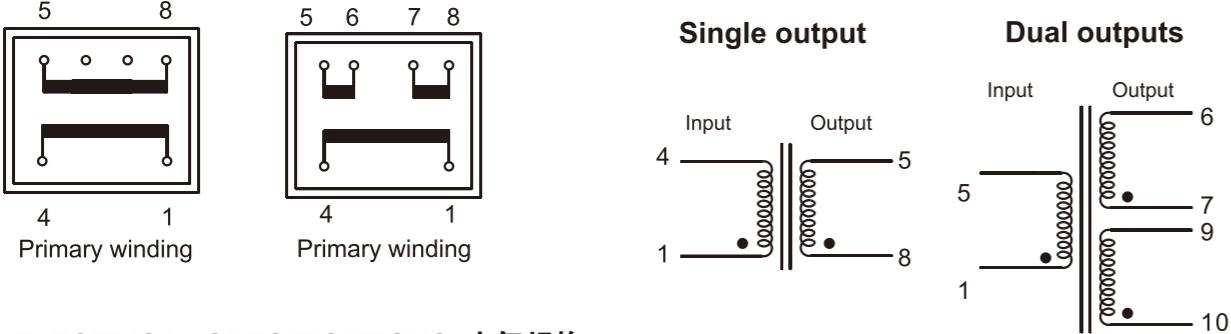

ELECTRICAL SPECIFICATIONS 电气规格

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Dimension H(mm)	Weight (g)	Certificate			
									VDE	UL	CQC	CE
BV351S06030	115V	6	500	3	9.6	T 70 B	31.5MAX	115				
BV351S09030	115V	9	333	3	14.8	T 70 B	31.5MAX	115				
BV351S10030	115V	10	300	3	15.2	T 70 B	31.5MAX	115				
BV351S12030	115V	12	250	3	18.9	T 70 B	31.5MAX	115				
BV351S15030	115V	15	200	3	22.8	T 70 B	31.5MAX	115				
BV351S18030	115V	18	167	3	27.4	T 70 B	31.5MAX	115				
BV351S24030	115V	24	125	3	36.5	T 70 B	31.5MAX	115				
BV351D06030	115V	2x6	2X250	3	2x9.6	T 70 B	31.5MAX	115				
BV351D09030	115V	2x9	2X167	3	2x14.8	T 70 B	31.5MAX	115				
BV351D10030	115V	2x10	2X150	3	2x15.2	T 70 B	31.5MAX	115				
BV351D12030	115V	2x12	2X125	3	2x18.9	T 70 B	31.5MAX	115				
BV351D15030	115V	2x15	2X100	3	2x22.8	T 70 B	31.5MAX	115				
BV351D18030	115V	2x18	2X83	3	2x27.4	T 70 B	31.5MAX	115				
BV351D24030	115V	2x24	2X63	3	2x36.5	T 70 B	31.5MAX	115				
BV352S06030	230V	6	500	3	9.6	T 70 B	31.5MAX	115	●			
BV352S09030	230V	9	333	3	14.8	T 70 B	31.5MAX	115	●			
BV352S10030	230V	10	300	3	15.2	T 70 B	31.5MAX	115	●			
BV352S12030	230V	12	250	3	18.9	T 70 B	31.5MAX	115	●			
BV352S15030	230V	15	200	3	22.8	T 70 B	31.5MAX	115	●			
BV352S18030	230V	18	167	3	27.4	T 70 B	31.5MAX	115	●			
BV352S24030	230V	24	125	3	36.5	T 70 B	31.5MAX	115	●			
BV352D06030	230V	2x6	2X250	3	2x9.6	T 70 B	31.5MAX	115	●			
BV352D09030	230V	2x9	2X167	3	2x14.8	T 70 B	31.5MAX	115	●			
BV352D10030	230V	2x10	2X150	3	2x15.2	T 70 B	31.5MAX	115	●			
BV352D12030	230V	2x12	2X125	3	2x18.9	T 70 B	31.5MAX	115	●			
BV352D15030	230V	2x15	2X100	3	2x22.8	T 70 B	31.5MAX	115	●			
BV352D18030	230V	2x18	2X83	3	2x27.4	T 70 B	31.5MAX	115				
BV352D24030	230V	2x24	2X63	3	2x36.5	T 70 B	31.5MAX	115				

EI38 SERIES [2.4VA-4.0VA]

FEATURES



- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
INPUT:230V 4200Vrms
INPUT:115V 2800Vrms
- Operation Frequency:50/60Hz
- Resin Class B IEC 85
(20,000 h Testing to IEC 216)
- 100% Production Tested

产品特点

- 真空灌封
- 双槽胶芯设计
- UL94V-0自熄灭阻燃材料
- 介电强度
输入230V时:4200Vrms
输入115V时:2800Vrms
- 工作频率:50/60Hz
- 温度等级B级封胶
(经过20000小时IEC 216测试)
- 生产线全检




MECHANICAL SPECIFICATION 尺寸图

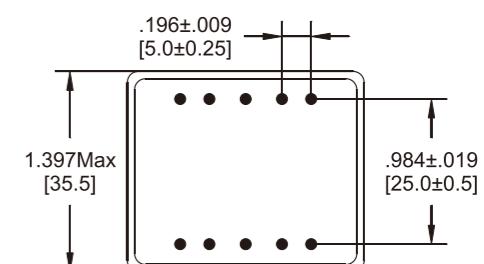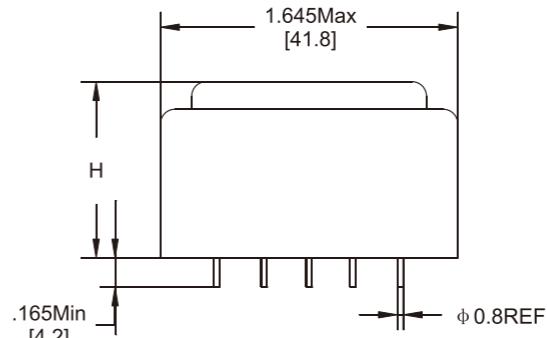


Recommended Drill Hole Diameter for Pins 0.051 inches
1.30mm


1 Secondary winding



2 Secondary windings




SCHEMATIC 原理图



Single output



Dual outputs



ELECTRICAL SPECIFICATIONS 电气规格

2.4VA EI38-10 SERIES

Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Heigh Dimension H(mm)	Weight (g)	Certificate		
									VDE	UL	CQC
BV381S06024	115V	6	400	2.4	8.0	T 70 B	23.0MAX	148			
BV381S09024	115V	9	267	2.4	12.0	T 70 B	23.0MAX	148			
BV381S10024	115V	10	240	2.4	14.0	T 70 B	23.0MAX	148			
BV381S12024	115V	12	200	2.4	16.0	T 70 B	23.0MAX	148			
BV381S15024	115V	15	160	2.4	20.0	T 70 B	23.0MAX	148			
BV381S18024	115V	18	133	2.4	24.1	T 70 B	23.0MAX	148			
BV381S24024	115V	24	100	2.4	32.4	T 70 B	23.0MAX	148			
BV381D06024	115V	2x6	2x200	2.4	2x8	T 70 B	23.0MAX	148			
BV381D09024	115V	2x9	2x133	2.4	2x12	T 70 B	23.0MAX	148			
BV381D10024	115V	2x10	2x120	2.4	2x14	T 70 B	23.0MAX	148			
BV381D12024	115V	2x12	2x100	2.4	2x16	T 70 B	23.0MAX	148			
BV381D15024	115V	2x15	2x80	2.4	2x20	T 70 B	23.0MAX	148			
BV381D18024	115V	2x18	2x66.5	2.4	2x24.1	T 70 B	23.0MAX	148			
BV381D24024	115V	2x24	2x50	2.4	2x32.4	T 70 B	23.0MAX	148			
BV382S06024	230V	6	400	2.4	8.0	T 70 B	23.0MAX	148	●		
BV382S09024	230V	9	267	2.4	12.0	T 70 B	23.0MAX	148	●		
BV382S10024	230V	10	240	2.4	14.0	T 70 B	23.0MAX	148	●		
BV382S12024	230V	12	200	2.4	16.0	T 70 B	23.0MAX	148	●		
BV382S15024	230V	15	160	2.4	20.0	T 70 B	23.0MAX	148	●		
BV382S18024	230V	18	133	2.4	24.1	T 70 B	23.0MAX	148	●		
BV382S24024	230V	24	100	2.4	32.4	T 70 B	23.0MAX	148	●		
BV382D06024	230V	2x6	2x200	2.4	2x8	T 70 B	23.0MAX	148	●		
BV382D09024	230V	2x9	2x133	2.4	2x12	T 70 B	23.0MAX	148	●		
BV382D10024	230V	2x10	2x120	2.4	2x14	T 70 B	23.0MAX	148	●		
BV382D12024	230V	2x12	2x100	2.4	2x16	T 70 B	23.0MAX	148	●		
BV382D15024	230V	2x15	2x80	2.4	2x20	T 70 B	23.0MAX	148	●		
BV382D18024	230V	2x18	2x66.5	2.4	2x24.1	T 70 B	23.0MAX	148	●		
BV382D24024	230V	2x24	2x50	2.4	2x32.4	T 70 B	23.0MAX	148	●		

3.2VA EI38-13.6 SERIES

Secondary protection (mA)	Order Number	Input Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (°C)	Heigh Dimension H(mm)	Weight (g)	Certificate		
										VDE	UL	CQC
T630mA	BV381S06032	115V	6	533.33	3.2	8.0	T 70 B	27.5MAX	148	●		
T400mA	BV381S09032	115V	9	355.56	3.2	12.0	T 70 B	27.5MAX	148	●		
T400mA	BV381S10032	115V	10	320.00	3.2	14.0	T 70 B	27.5MAX	148	●		
T315mA	BV381S12032	115V	12	266.67	3.2	16.0	T 70 B	27.5MAX	148	●		
T250mA	BV381S15032	115V	15	213.33	3.2	20.0	T 70 B	27.5MAX	148	●		
T200mA	BV381S18032	115V	18	177.78	3.2	24.1	T 70 B	27.5MAX	148	●		
T160mA	BV381S24032	115V	24	133.33	3.2	32.4	T 70 B	27.5MAX	148	●		
T315mA	BV381D06032	115V	2X6	266.67	3.2	2X8	T 70 B	27.5MAX	148	●		
T200mA	BV381D09032	115V	2X9	177.78	3.2	2X12	T 70 B	27.5MAX	148	●		
T200mA	BV381D10032	115V	2X10	160.00	3.2	2X14	T 70 B	27.5MAX	148	●		
T160mA	BV381D12032	115V	2X12	133.33	3.2	2X16	T 70 B	27.5MAX	148	●		
T125mA	BV381D15032	115V	2X15	106.67	3.2	2X20	T 70 B	27.5MAX	148	●		
T100mA	BV381D18032	115V	2X18	88.89	3.2	2X24.1	T 70 B	27.5MAX	148	●		
T80mA	BV381D24032	115V	2X24	66.67	3.2	2X32.4	T 70 B	27.5MAX	148			
T630mA	BV382S06032	230V	6	533.33	3.2	8.0	T 70 B	27.5MAX	148	●		
T400mA	BV382S09032	230V	9	355.56	3.2	12.0	T 70 B	27.5MAX	148	●		
T400mA	BV382S10032	230V	10	320.00	3.2	14.0	T 70 B	27.5MAX	148	●		
T315mA	BV382S12032	230V	12	266.67	3.2	16.0	T 70 B	27.5MAX	148	●		
T250mA	BV382S15032	230V	15	213.33	3.2	20.0	T 70 B	27.5MAX	148	●		
T200mA	BV382S18032	230V	18	177.78	3.2	24.1	T 70 B	27.5MAX	148	●		
T160mA	BV382S24032	230V	24	133.33	3.2	32.4	T 70 B	27.5MAX	148	●		
T315mA	BV382D06032	230V	2X6	266.67	3.2	2X8	T 70 B	27.5MAX	148	●		
T200mA	BV382D09032	230V	2X9	177.78	3.2	2X12	T 70 B	27.5MAX	148	●		
T200mA	BV382D10032	230V	2X10	160.00	3.2	2X14	T 70 B	27.5MAX	148	●		
T160mA	BV382D12032	230V	2X12	133.33	3.2	2X16	T 70 B	27.5MAX	148	●		
T125mA	BV382D15032	230V	2X15	106.67	3.2	2X20	T 70 B	27.5MAX	148	●		
T100mA	BV382D18032	230V	2X18	88.89	3.2	2X24.1	T 70 B	27.5MAX	148	●		
T80mA	BV382D24032	230V	2X24	66.67	3.2	2X32.4	T 70 B	27.5MAX	148			



4.0VA EI38-15 SERIES

EI42-14.6 SERIES [5.0VA]

FEATURES


- CQC Approved:
CQC file No.CQC 1001054660
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
INPUT:230V 4200Vrms
INPUT:115V 2800Vrms
Operation Frequency:50/60Hz
- Resin Class B IEC 85
(20,000 h Testing to IEC 216)
- 100% Production Tested

MECHANICAL SPECIFICATION 尺寸图

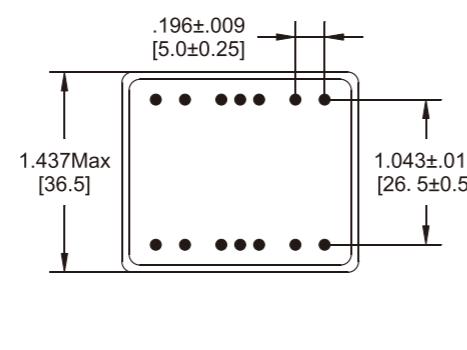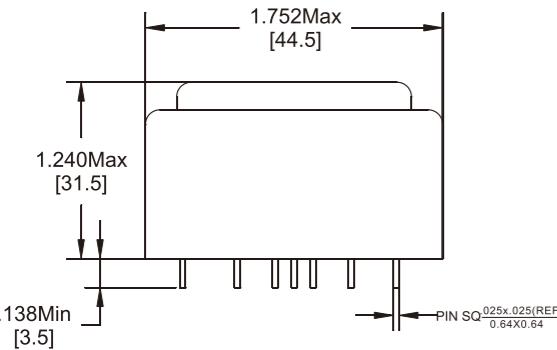


Recommended Drill Hole Diameter for Pins **0.051 inches**
1.30mm

1 Secondary winding




Primary winding

2 Secondary windings




Primary winding

SCHEMATIC 原理图



Single output



Dual outputs



ELECTRICAL SPECIFICATIONS 电气规格

5.0VA EI42-14.6 SERIES

Secondary protection (mA)	Order Number	Input Voltage (V)	No-load Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	Ambient TEMP. (°C)	Weight (g)	Certificate			
									VDE	UL	CQC	CE
T800	BV421S06050	115V	8.4	6	833	5.0VA	T 70 B	180g				
T630	BV421S09050	115V	12.6	9	556	5.0VA	T 70 B	180g				
T500	BV421S10050	115V	13.5	10	500	5.0VA	T 70 B	180g				
T400	BV421S12050	115V	16.9	12	417	5.0VA	T 70 B	180g				
T400	BV421S13050	115V	17.5	13	385	5.0VA	T 70 B	180g				
T315	BV421S15050	115V	21	15	333	5.0VA	T 70 B	180g				
T315	BV421S18050	115V	24.8	18	278	5.0VA	T 70 B	180g				
T200	BV421S24050	115V	33.7	24	208	5.0VA	T 70 B	180g				
T400	BV421D06050	115V	2x8.4	2X6	2x433	5.0VA	T 70 B	180g				
T315	BV421D09050	115V	2x12.6	2X9	2x278	5.0VA	T 70 B	180g				
T250	BV421D10050	115V	2x13.5	2X10	2x250	5.0VA	T 70 B	180g				
T200	BV421D12050	115V	2x16.9	2X12	2x208	5.0VA	T 70 B	180g				
T200	BV421D13050	115V	2x17.5	2X13	2x192	5.0VA	T 70 B	180g				
T160	BV421D15050	115V	2x21	2X15	2x167	5.0VA	T 70 B	180g				
T160	BV421D18050	115V	2x24.8	2X18	2x139	5.0VA	T 70 B	180g				
T100	BV421D24050	115V	2x33.7	2X24	2x104	5.0VA	T 70 B	180g				
T800	BV422S06050	220V	8.4	6	833	5.0VA	T 70 B	180g				
T630	BV422S09050	220V	12.6	9	556	5.0VA	T 70 B	180g	●			
T500	BV422S10050	220V	13.5	10	500	5.0VA	T 70 B	180g	●			
T400	BV422S12050	220V	16.9	12	417	5.0VA	T 70 B	180g	●			
T400	BV422S13050	220V	17.5	13	385	5.0VA	T 70 B	180g	●			
T315	BV422S15050	220V	21	15	333	5.0VA	T 70 B	180g	●			
T315	BV422S18050	220V	24.8	18	278	5.0VA	T 70 B	180g	●			
T200	BV422S24050	220V	33.7	24	208	5.0VA	T 70 B	180g	●			
T400	BV422D06050	220V	2x8.4	2X6	2x433	5.0VA	T 70 B	180g	●			
T315	BV422D09050	220V	2x12.6	2X9	2x278	5.0VA	T 70 B	180g	●			
T250	BV422D10050	220V	2x13.5	2X10	2x250	5.0VA	T 70 B	180g	●			
T200	BV422D12050	220V	2x16.9	2X12	2x208	5.0VA	T 70 B	180g	●			
T200	BV422D13050	220V	2x17.5	2X13	2x192	5.0VA	T 70 B	180g	●			
T160	BV422D15050	220V	2x21	2X15	2x167	5.0VA	T 70 B	180g	●			
T160	BV422D18050	220V	2x24.8	2X18	2x139	5.0VA	T 70 B	180g	●			
T100	BV422D24050	220V	2x33.7	2X24	2x104	5.0VA	T 70 B	180g	●			
T800	BV422S06050-230	230V	8.4	6	833	5.0VA	T 70 B	180g				
T630	BV422S09050-230	230V	12.6	9	556	5.0VA	T 70 B	180g				
T500	BV422S10050-230	230V	13.5	10	500	5.0VA	T 70 B	180g				
T400	BV422S12050-230	230V	16.9	12	417	5.0VA	T 70 B	180g				
T400	BV422S13050-230	230V	17.5	13	385	5.0VA	T 70 B	180g				
T315	BV422S15050-230	230V	21	15	333	5.0VA	T 70 B	180g				
T315	BV422S18050-230	230V	24.8	18	278	5.0VA	T 70 B	180g				
T200	BV422S24050-230	230V	33.7	24	208	5.0VA	T 70 B	180g				
T400	BV422D06050-230	230V	2x8.4	2X6	2x433	5.0VA	T 70 B	180g				
T315	BV422D09050-230	230V	2x12.6	2X9	2x278	5.0VA	T 70 B	180g				
T250	BV422D10050-230	230V	2x13.5	2X10	2x250	5.0VA	T 70 B	180g				
T200	BV422D12050-230	230V	2x16.9	2X12	2x208	5.0VA	T 70 B	180g				
T200	BV422D13050-230	230V	2x17.5	2X13	2x192	5.0VA	T 70 B	180g				
T160	BV422D15050-230	230V	2x21	2X15	2x167	5.0VA	T 70 B	180g				
T160	BV422D18050-230	230V	2x24.8	2X18	2x139	5.0VA	T 70 B	180g				
T100	BV422D24050-230	230V	2x33.7	2X24	2x104	5.0VA	T 70 B	180g				

PACKAGING 包装规格


Model	Tray Size LXWXH(mm)	QTY (Per Tray)	Weight (Per Tray)	Carton Outline LXWXH(mm)	QTY (Per Carton)	Weight (Per Carton)
EI42-14.6 Series	220X170X33	12PCS	2.160kg	370		

EI48-16.8 SERIES [10VA]

FEATURES


- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
INPUT:230V 4200Vrms
INPUT:115V 2800Vrms
Operation Frequency:50/60Hz
- Resin Class B IEC 85
(20,000 h Testing to IEC 216)
- 100% Production Tested
- Conforms to EN 61558

MECHANICAL SPECIFICATION 尺寸图

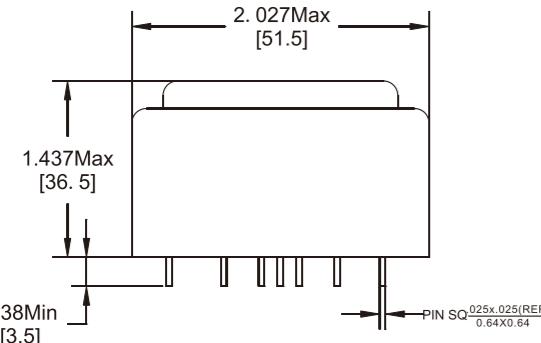


Recommended Drill Hole Diameter for Pins 0.051 inches 1.30mm

1 Secondary winding




Primary winding

2 Secondary windings




Primary winding

SCHEMATIC 原理图



Single output



Dual outputs





ELECTRICAL SPECIFICATIONS 电气规格

10VA EI48-16.8 SERIES

Secondary protection (mA)	Order Number	Input Voltage (V)	No-load Voltage (V)	SEC. Voltage (V)	Rated Current (mA)	Rated Power (VA)	Ambient TEMP. (°C)	Weight (g)	Certificate			
									VDE	UL	CQC	CE
T125	BV481S06100	115V	7.5	6	1667	10.0VA	T 50 B	245g				
T125	BV481S09100	115V	11.5	9	1111	10.0VA	T 50 B	245g				
T125	BV481S10100	115V	12.5	10	1000	10.0VA	T 50 B	245g				
T125	BV481S12100	115V	15	12	833	10.0VA	T 50 B	245g				
T125	BV481S15100	115V	18.8	15	667	10.0VA	T 50 B	245g				
T125	BV481S18100	115V	22.5	18	556	10.0VA	T 50 B	245g				
T125	BV481S24100	115V	30	24	417	10.0VA	T 50 B	245g				
T125	BV481D06100	115V	2x7.5	2X6	2x833	10.0VA	T 50 B	245g				
T125	BV481D09100	115V	2x11.5	2X9	2x556	10.0VA	T 50 B	245g				
T125	BV481D10100	115V	2x12.5	2X10	2x500	10.0VA	T 50 B	245g				
T125	BV481D12100	115V	2x15	2X12	2x417	10.0VA	T 50 B	245g				
T125	BV481D15100	115V	2x18.8	2X15	2x333	10.0VA	T 50 B	245g				
T125	BV481D18100	115V	2x22.5	2X18	2x278	10.0VA	T 50 B	245g				
T125	BV481D24100	115V	2x30	2X24	2x208	10.0VA	T 50 B	245g				
T63	BV482S06100	230V	7.5	6	1667	10.0VA	T 50 B	245g	●			
T63	BV482S09100	230V	11.5	9	1111	10.0VA	T 50 B	245g	●			
T63	BV482S10100	230V	12.5	10	1000	10.0VA	T 50 B	245g	●			
T63	BV482S12100	230V	15	12	833	10.0VA	T 50 B	245g	●			
T63	BV482S15100	230V	18.8	15	667	10.0VA	T 50 B	245g	●			
T63	BV482S18100	230V	22.5	18	556	10.0VA	T 50 B	245g	●			
T63	BV482S24100	230V	30	24	417	10.0VA	T 50 B	245g	●			
T63	BV482D06100	230V	2x7.5	2X6	2x833	10.0VA	T 50 B	245g	●			
T63	BV482D09100	230V	2x11.5	2X9	2x556	10.0VA	T 50 B	245g	●			
T63	BV482D10100	230V	2x12.5	2X10	2x500	10.0VA	T 50 B	245g	●			
T63	BV482D12100	230V	2x15	2X12	2x417	10.0VA	T 50 B	245g	●			
T63	BV482D15100	230V	2x18.8	2X15	2x333	10.0VA	T 50 B	245g	●			
T63	BV482D18100	230V	2x22.5	2X18	2x278	10.0VA	T 50 B	245g	●			
T63	BV482D24100	230V	2x30	2X24	2x208	10.0VA	T 50 B	245g	●			

PACKAGING 包装规格

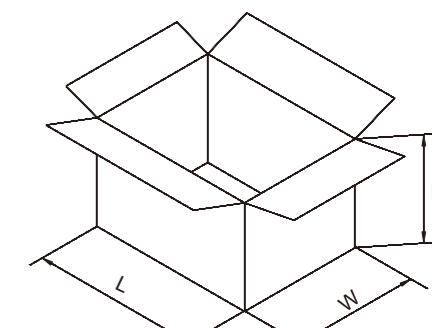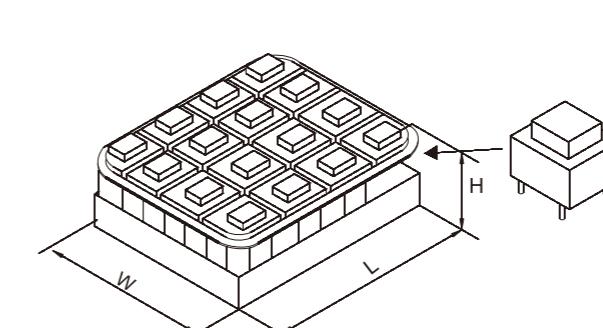

Model	EI48-16.8 Series
Tray Size LXWXH(mm)	220X170X33
QTY (Per Tray)	9PCS
Weight (Per Tray)	2.205kg

Model	EI48-16.8 Series
Carton Outline LXWXH(mm)	370X250X150
QTY (Per Carton)	36PCS
Weight (Per Carton)	8.820kg

EI3030 Series



FEATURES

- Inductance: 1.0~15mH
- Excellent temperature fluctuation resistance properties
- High electrical safety and long service-life features
- High voltage resistance to core
- Operating temperature : -25°C ~ 110°C
(Temperature rise included)
- Storage temperature: -25°C ~ 110°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 1.0V.


产品特点

- 电感量 : 1.0~15mH
- 优良的温度波动特性
- 高电气安全绝缘和长寿命特点
- 高绝缘电阻
- 产品操作温度范围 : -25°C ~ 110°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 110°C
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 1.0V


ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Normal inductance (mH)	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40^\circ\text{C}$)
XZM-RE30040	15.0	1.2
XZM-RE30041	10.0	1.5
XZM-RE30042	6.0	1.9
XZM-RE30043	4.5	2.2
XZM-RE30044	3.0	2.6
XZM-RE30045	2.5	2.9
XZM-RE30046	2.0	3.3
XZM-RE30047	1.5	3.6
XZM-RE30048	1.0	4.0


MECHANICAL SPECIFICATION(Dimensions: mm) 机械尺寸图

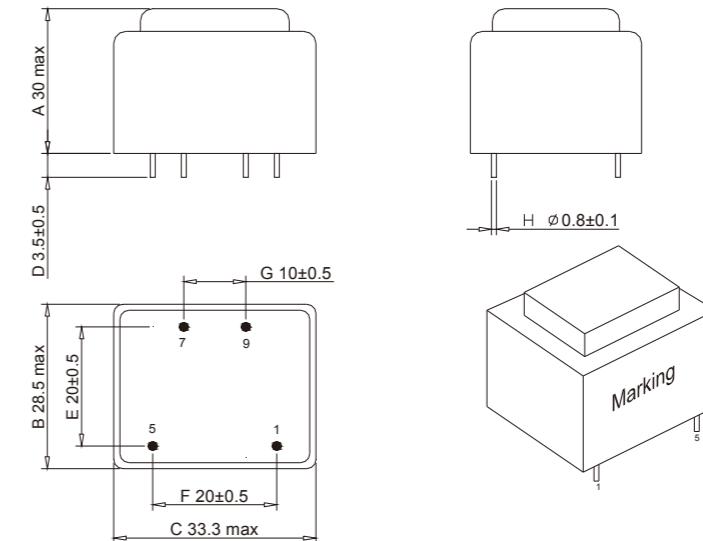

SCHEMATIC 原理图



Typical Temperature Rise Characteristics 典型温升特性

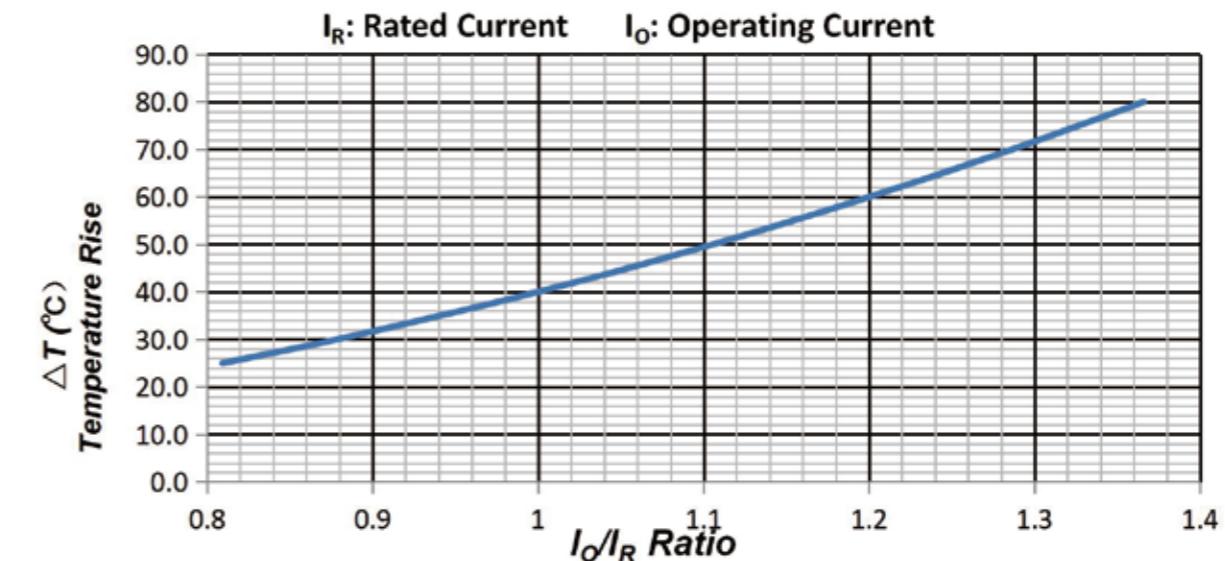

EI3035 Series



FEATURES

- Inductance: 1.0~20mH
- Excellent temperature fluctuation resistance properties
- High electrical safety and long service-life features
- High voltage resistance to core
- Operating temperature : -25°C ~ 110°C
(Temperature rise included)
- Storage temperature: -25°C ~ 110°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 1.0V.


产品特点

- 电感量 : 1.0~20mH
- 优良的温度波动特性
- 高电气安全绝缘和长寿命特点
- 高绝缘电阻
- 产品操作温度范围 : -25°C ~ 110°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 110°C
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 1.0V


ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Nominal inductance (mH)	Rated Current Arms (Amp) temperature rise 40°C (-T=40°C)
XZM-RE30001	20.0	1.2
XZM-RE30002	15.0	1.4
XZM-RE30003	10.0	1.7
XZM-RE30004	7.5	2.0
XZM-RE30005	5.0	2.3
XZM-RE30006	4.5	2.7
XZM-RE30007	3.0	3.1
XZM-RE30008	2.5	3.4
XZM-RE30009	2.0	3.4
XZM-RE30010	1.5	3.8
XZM-RE30011	1.0	4.5


MECHANICAL SPECIFICATION(Dimensions: mm) 机械尺寸图

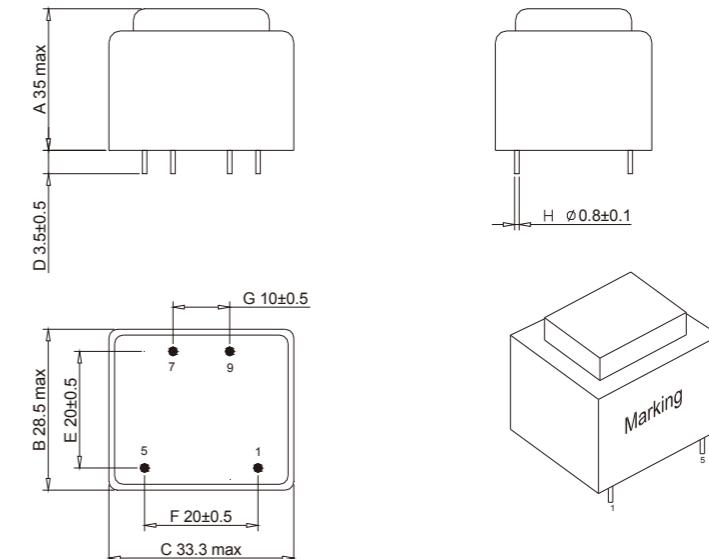

SCHEMATIC 原理图



Typical Temperature Rise Characteristics 典型温升特性

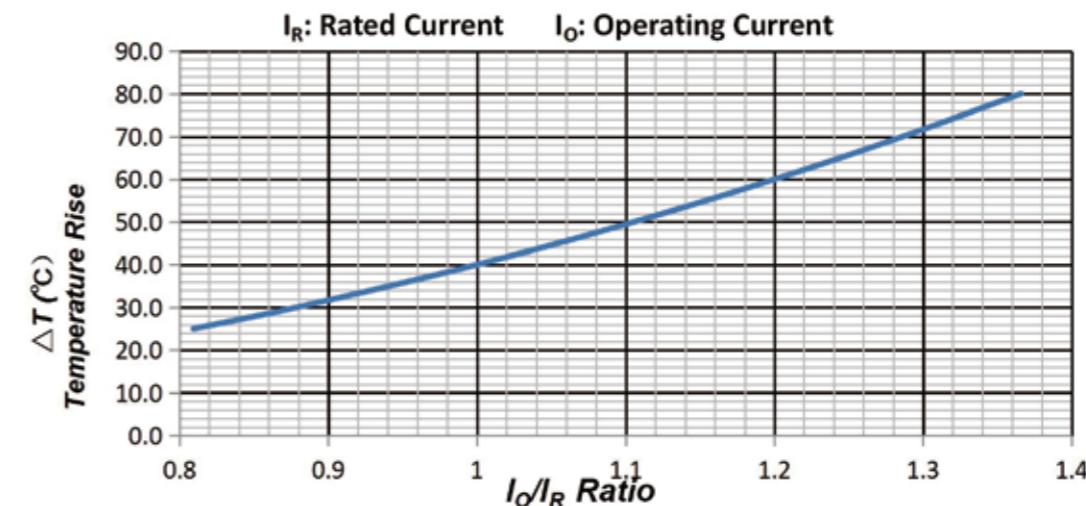

EI4138 Series



FEATURES

- Inductance: 3.0~20mH
- Excellent temperature fluctuation resistance properties
- High electrical safety and long service-life features
- High voltage resistance to core
- Operating temperature : -25°C ~ 110°C
(Temperature rise included)
- Storage temperature: -25°C ~ 110°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 1.0V.


产品特点

- 电感量 : 3.0~20mH
- 优良的温度波动特性
- 高电气安全绝缘和长寿命特点
- 高绝缘电阻
- 产品操作温度范围 : -25°C ~ 110°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 110°C
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 1.0V

ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Normal inductance (mH)	Rated Current Arms (Amp) temperature rise 40°C (-T=40°C)
XZM-RE41001	20.0	1.5
XZM-RE41002	15.0	1.8
XZM-RE41003	10.0	2.2
XZM-RE41004	7.5	2.5
XZM-RE41005	5.0	3.0
XZM-RE41006	4.0	3.2
XZM-RE41007	3.0	3.6


MECHANICAL SPECIFICATION(Dimensions: mm) 机械尺寸图

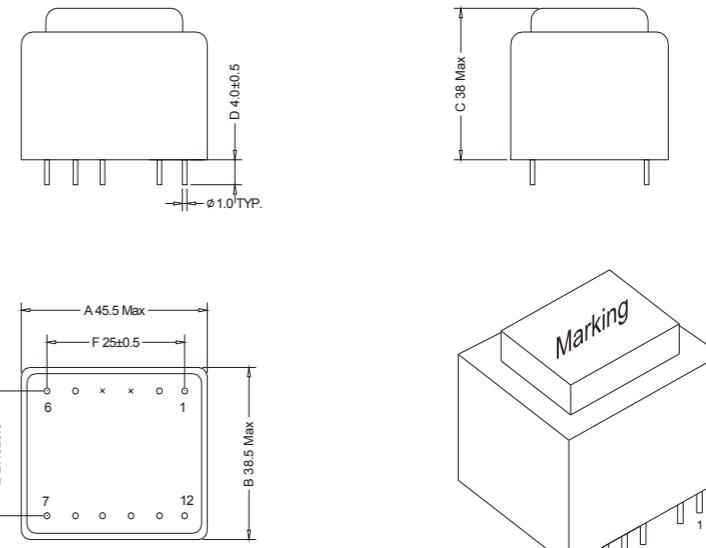

SCHEMATIC 原理图



Typical Temperature Rise Characteristics 典型温升特性

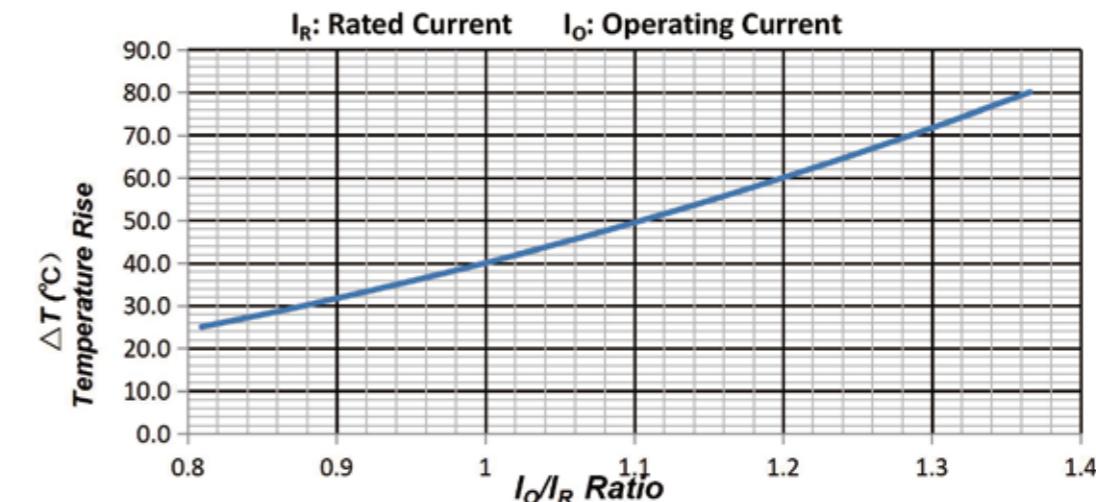

EI4140 Series



FEATURES

- Inductance: 3.0~20mH
- Excellent temperature fluctuation resistance properties
- High electrical safety and long service-life features
- High voltage resistance to core
- Operating temperature : -25°C ~ 110°C
(Temperature rise included)
- Storage temperature: -25°C ~ 110°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 1.0V.


产品特点

- 电感量 : 3.0~20mH
- 优良的温度波动特性
- 高电气安全绝缘和长寿命特点
- 高绝缘电阻
- 产品操作温度范围 : -25°C ~ 110°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 110°C
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 1.0V

ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Normal inductance (mH)	Rated Current Arms (Amp) temperature rise 40°C (-T=40°C)
XZM-RE41035	20.0	1.7
XZM-RE41036	15.0	2.0
XZM-RE41037	10.0	2.4
XZM-RE41038	8	2.8
XZM-RE41039	6.0	3.0
XZM-RE41040	4.0	3.5
XZM-RE41041	3.0	4.0


MECHANICAL SPECIFICATION(Dimensions: mm) 机械尺寸图

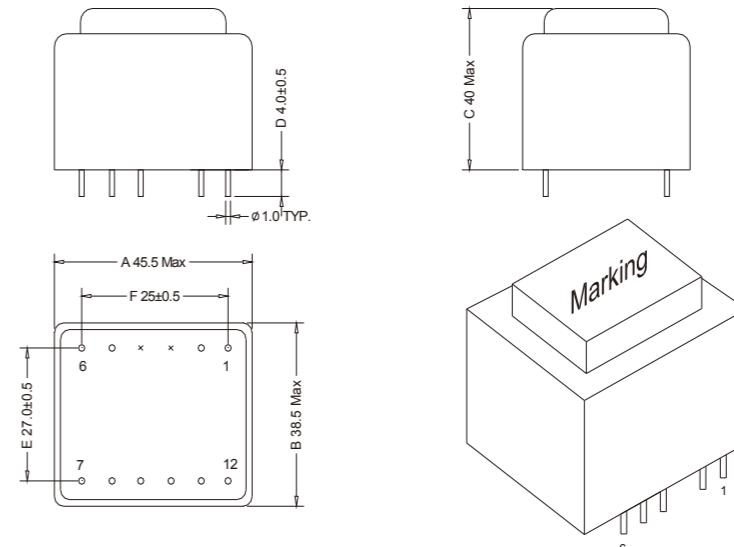

SCHEMATIC 原理图



Typical Temperature Rise Characteristics 典型温升特性

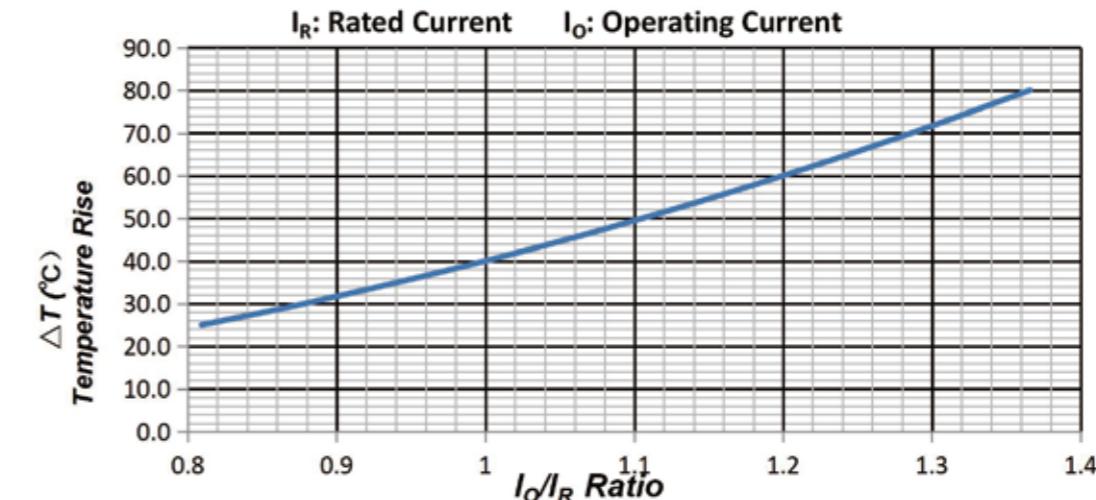


FERRITE TRANSFORMERS

Class B or Class F insulation system

FEATURES

- Primary / Secondary Insulation $\geq 4000V$
- Primary / Auxiliary Insulation $\geq 1500V$
- Creepage Distance Primary / Secondary $\geq 6mm$
- Construction Conforms to UL/IEC 62368, IEC60335, IEC61558
- Uses UL94 - V0 Listed Materials
- Class B or Class F insulation system

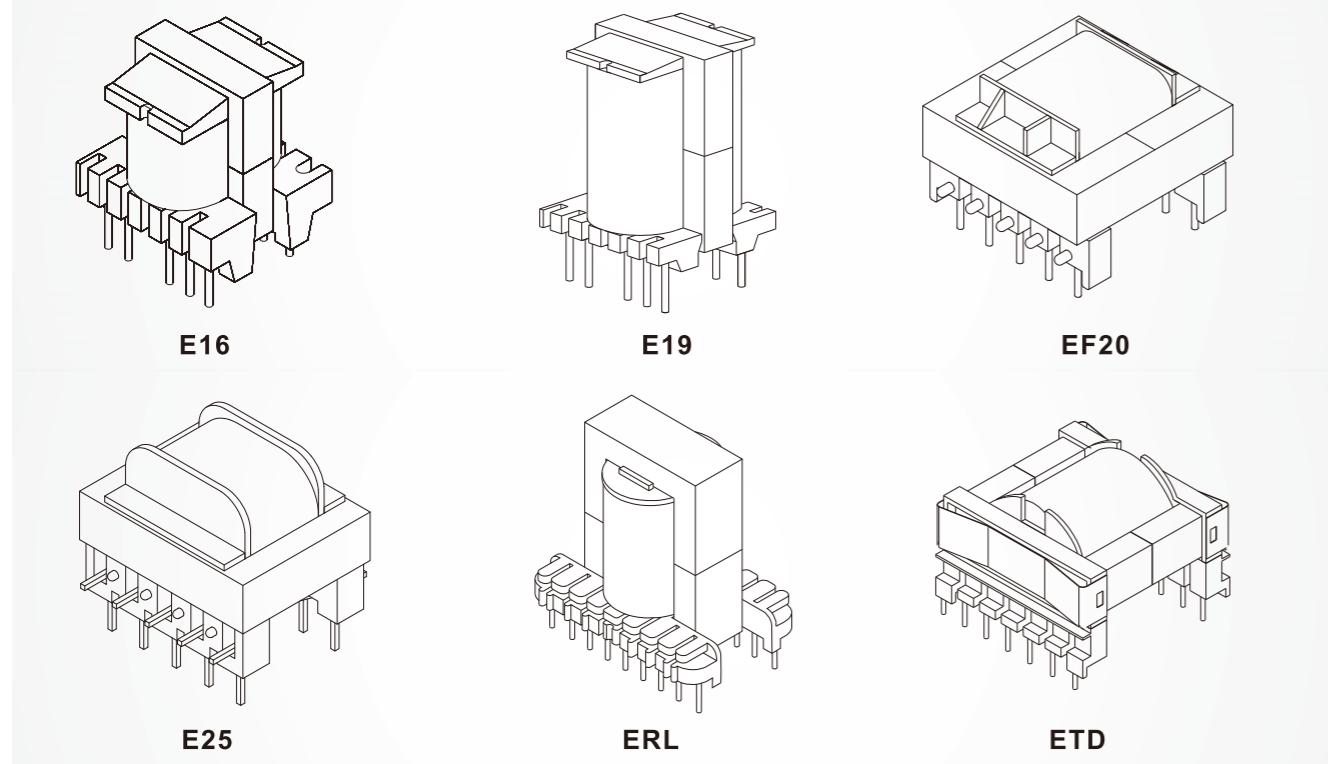

产品特点

- 初级/次级绝缘大于或等于4000V
- 初级/反馈绕组绝缘大于或等于1500V
- 爬电距离初级/次级大于或等于6mm
- 结构符合UL/IEC 62368, IEC60335, IEC61558
- 使用UL94-V0 绝缘材料
- 应用Class B 或 Class F 绝缘系统


DESIGN REFERENCE OF FLYBACK SWITCHING TRANSFORMER 反激式开关变压器设计参考

ITEM		常用结构				
		EI	EE	EF	EFD	EPC
67KHz	0-5W	EI16	EE16	EF16	EFD12	EPC13
	5-10W	EI19	EE19	EF19	EFD15	EPC17
	10-20W	EI20	EE22	EF20	EFD20	EPC19
	20-30W	EI25	EE25	EF25	EFD25	EPC24
	30-50W	EI30	EE30	EF30	EFD30	EPC28
	50-70W	EI40	EE40	EF32	—	EPC30
	70-100W	EI50	EE42	—	—	—
	100-150W	EI60	EE60	—	—	—
Common Power	150-200W	—	EE70	—	—	—
	0-5W	EI12.6	EE13	EF12.6	—	EPC10
	5-10W	EI16	EE16	EF16	EFD12	EPC13
	10-20W	EI19	EE19	EF20	EFD15	EPC17
	20-50W	EI25	EE25	EF25	EFD20	EPC19
	50-100W	EI40	EE40	EF30	EFD25	EPC24
	100-200W	EI50	EE42	EF32	EFD30	EPC30
	优点 Advantages	应用较广泛，结构紧凑、体积小、工作频率高、工作电压范围广、损耗低 Wide Application ,compact size, high working frequency, wide operating voltage range, low power loss	应用广泛，价格便宜，工作频率高、工作电压范围广，磁心散热好， Wide Application ,enough space for leads, wide application scope, high working frequency, wide operating voltage range, core with good heat - dissipation	应用广泛，引线空间大，工作频率高、工作电压范围广，热稳定性好， Wide application ,enough space for leads, wide application scope, high working frequency, wide operating voltage range, excellent thermostability	具有热阻小、损耗小、功率大、工作频率宽、重量轻、结构合理、易表面贴装 Low thermal resistance, low power loss, high power, wide frequency range, light weight and low height, easy assembling	具有热阻小、衰耗小、功率大、工作频率宽、重量轻、结构合理、易表面贴装，屏蔽效果好等优点 Low thermal resistance, low power loss, high power, wide frequency range, light weight and low height, easy assembling, good shielding effect
100KHz	缺点 Disadvantages	EMI-RFI效果不理想 Not very ideal in EMI-RFI effect				散热性能稍差，面积较大 slightly poor in heat dissipation, bigger size
	应用场合 Application	电源转换变压器及扼流圈、DVD电源、照相机闪光灯、通讯设备及其它电子设备 Switching power module, choke, DVD power supply , camera flash, communication device and other Electronic devices, etc.	广泛应用于程控交换机电源、液晶显示屏电源、大功率UPS逆变器电源、计算机电源、节能灯等领域 SPC exchange power supply, LCD power supply, high-power UPS inverter power supply ,computer power supply, lighting, etc.	广泛应用于电源滤波器、EMI滤波器、小型脉冲变压器等領域 Power-supply filter, EMI Filter, minitype pulse transformer, etc.	广泛应用于体积小而功率大的变压器，如精密仪器、模块电源、计算机终端输出等 Transformers with small size and high power, such as precise instrument, module power supply, computer terminal output, etc.	广泛应用于体积小而功率大且有屏蔽和电磁兼容要求的变压器，如精密仪器、程控交换机模块电源、导航设备等 Transformers with small size, high power, high requirement on electromagnetic shielding and compatibility, such as precise instrument, SPC exchange module power supply, navigation equipment, etc.


ITEM		常用结构						
		EER	ETD	EP	RM	POT	PQ	
常用功率 Common Power	67KHz	0-5W	EER20	—	EP13	RM5	POT1408	—
		5-10W	EER28	—	EP17	RM6	POT1811	—
		10-20W	EER30	ETD29	EP20	RM8	POT2213	—
		20-30W	EER34	ETD34	—	RM10	POT3019	PQ2016
		30-50W	EER39	ETD44	—	RM12	POT3622	PQ2625
		50-70W	EER42	ETD49	—	RM12	—	PQ3026
		70-100W	EER49	—	—	RM14	—	PQ3230
		100-150W	EER59	—	—	—	—	PQ4030
		150-200W	—	—	—	—	—	PQ5050
		0-5W	—	—	EP10	RM4	POT1107	—
100KHz	100KHz	5-10W	EER20	—	EP13	RM5	POT1408	—
		10-20W	EER28	ETD29	EP17	RM6	POT1811	—
		20-50W	EER30	ETD34	EP20	RM10	POT2213	PQ2016
		50-100W	EER35	ETD44	—	RM12	POT3019	PQ2625
		100-200W	EER42	ETD49	—	RM14	POT3622	PQ3026
		优点 Advantages	耦合位置好,可设计功 率大而漏感小的变压器 Good coupling position, better for designing with high power and low leakage	可设计出功率大且漏感 小的变压器,同时易于 组装,安规成本,电磁 屏蔽,标准化难度等各 方面都很出色。 Better for designing with high power and low leakage; easy assembling ; outstanding in safety performance, EMI and standardization	具有磁屏蔽效果好、分 布电容小、传输损耗 低、电感量高、漏感 磁场分布均匀等优点, 且骨架配有多路接头, 易设计多路输出变压 器 Good shielding effect , small distributed capacitance, low transmission loss and leakage, even magnetic field, bobbin with multi-Pins , better for designing with multi-output	磁屏蔽效果好,抗干扰 能力强,漏感小,骨架 备有多路引脚,可设计 多路输出变压器,可 高密度安装。EMI-RF I效果较理想 Good shielding effect, strong anti- interference capacity, low leakage flux, bobbin with multi-Pins , better for designing with multi-output	体积小、绕线方便、磁 屏蔽及散热效果均衡 Compact size, good magnetic shield effect, excellent heat - dissipation effect	相同功率下,体积小, 损耗小,温升低,抗干 扰性能好,能有效减少 安装体积,备有多个引 脚,绕制接线方便。组 装成本低,易满足安规 要求 Compact size ,lowe power loss, low temperature rise, strong anti- interference capacity , save the install size , bobbin with multi- Pins, easy to meet safety requirement
		缺点 Disadvantages	内部线圈散热不良,温 升较高 Poor heat dissipation in inner coil, high temperature rise	EMI-RFI效果不理想 Not very ideal in EMI- RFI effect 开关电源,传输变压 器,电子镇流器。广泛 应用于家电、通讯、照 明、医疗设备、办公 自动化、军品、OA设 备、电子仪器、航空航天 等领域	不好绕线,绕制成本 高 Difficult for winding, high winding cost 散热较差,安规成本较 高,磁心价格较贵, PIN之间排列不规则, 出于安规要求,一般需 飞线 poor in heat dissipation, high cost for safety certificate, expensive core, irregular Pins layout, for safety	较贵,不通用 More expensive, not universal	价格较贵,标准化较 难,一般做大功率产品 使用 More expensive, hard for standardization, apply to product with high power	
		应用场合 Application	开关电源变压器,脉冲 变压器,电子镇流器等 SMPT, pulse transformer,electronic ballast, etc.	宽带变压器、电感器、 隔离变压器、匹配变压 器,广泛应用于程控交 换机终端和精密电子设 备等领域 Wideband Transformer, inductor, isolating transformer, matching transformer. Widely use in SPC exchange terminal, sophisticated electronics, etc.	主要应用于载波通讯、 网络、数字、计算机等 领域 Widely use in the field of carrier wave communication, internet, digital, computer ,etc.	载波滤波器、高灵敏度 感应器、高效率传感 器、电源转换变压器等 领域 Carrier filter, high sensitivity inductor , high efficiency sensor , Switching power module, etc.	主功率变压器、驱动变 压器、平滑扼流圈、辅 助功率变压器。主要应 用于网络、通讯、电 源、电器设备、医疗等 领域 Driver transformer, smoothing choke, Auxiliary power transformer.Widely use in internet, communication, power supply, electrical equipment, medical equipment, etc.	

RECOMMENDED FOOT POSITION FOR POWER FERRITE SWITCHING TRANSFORMERS 常用脚位推荐

VERTICAL STRUCTURE 立式结构

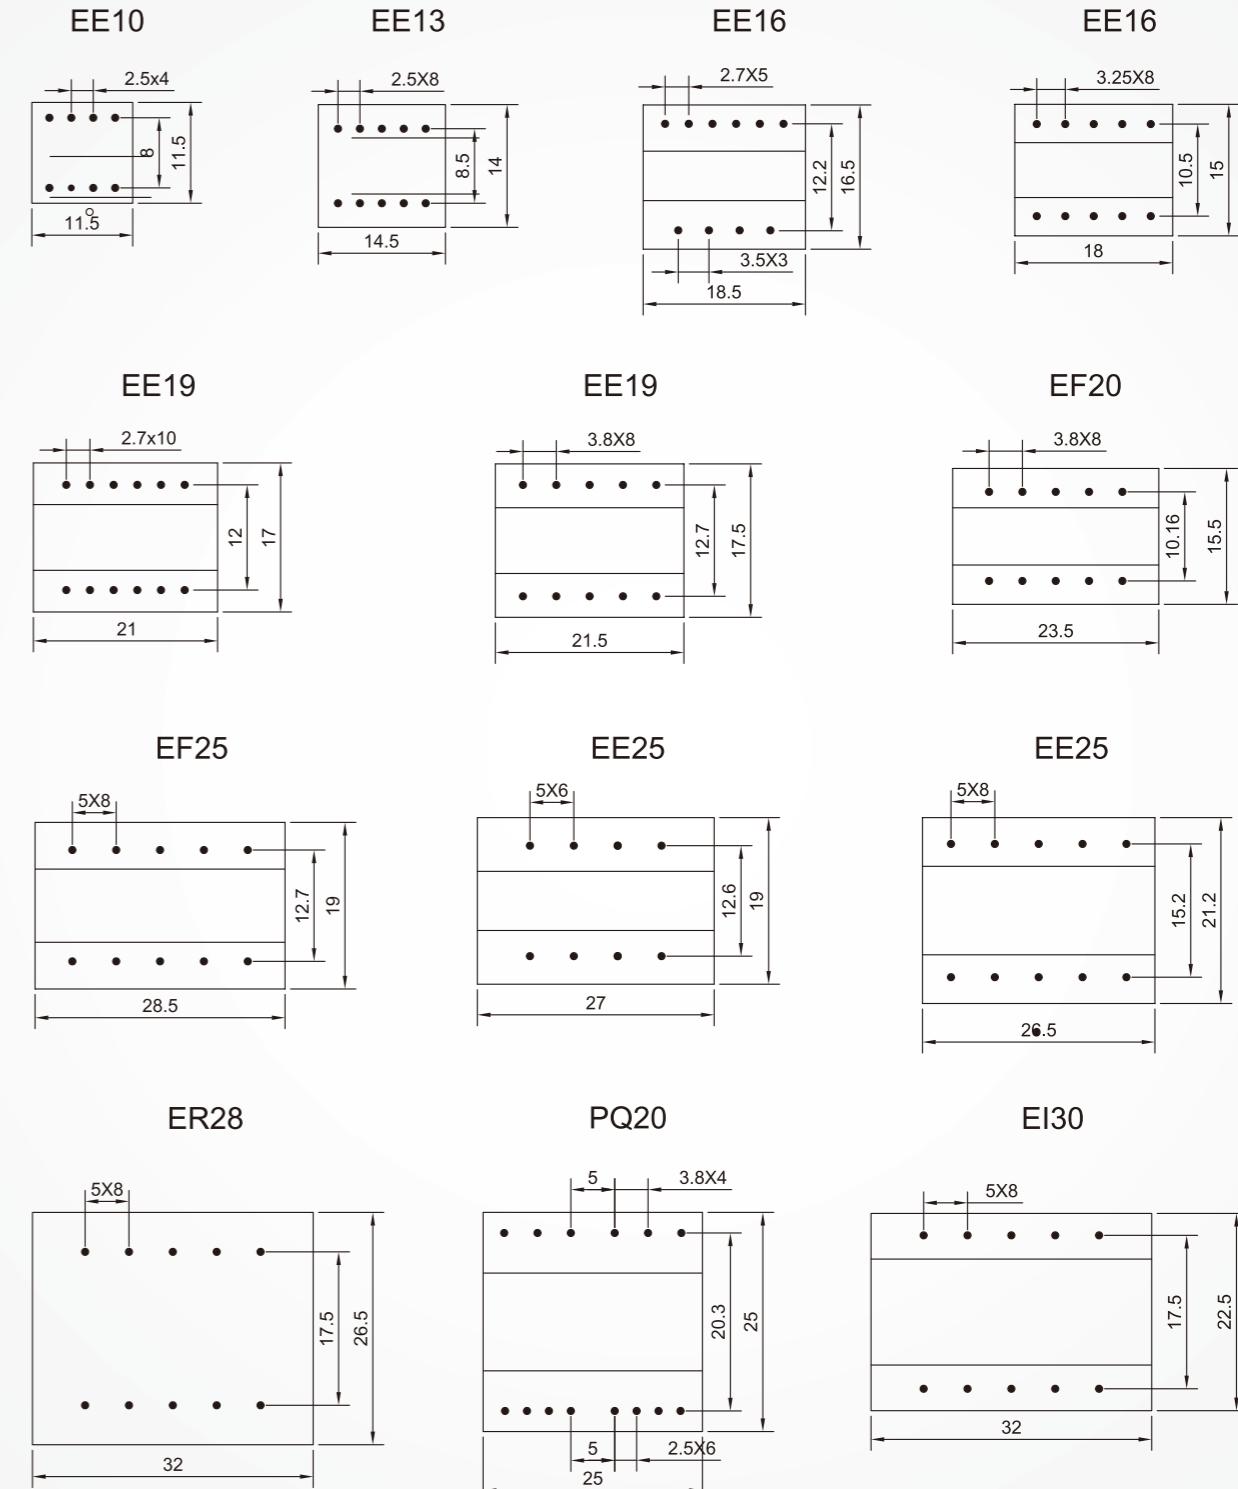

HORIZONTAL STRUCTURE 卧式结构

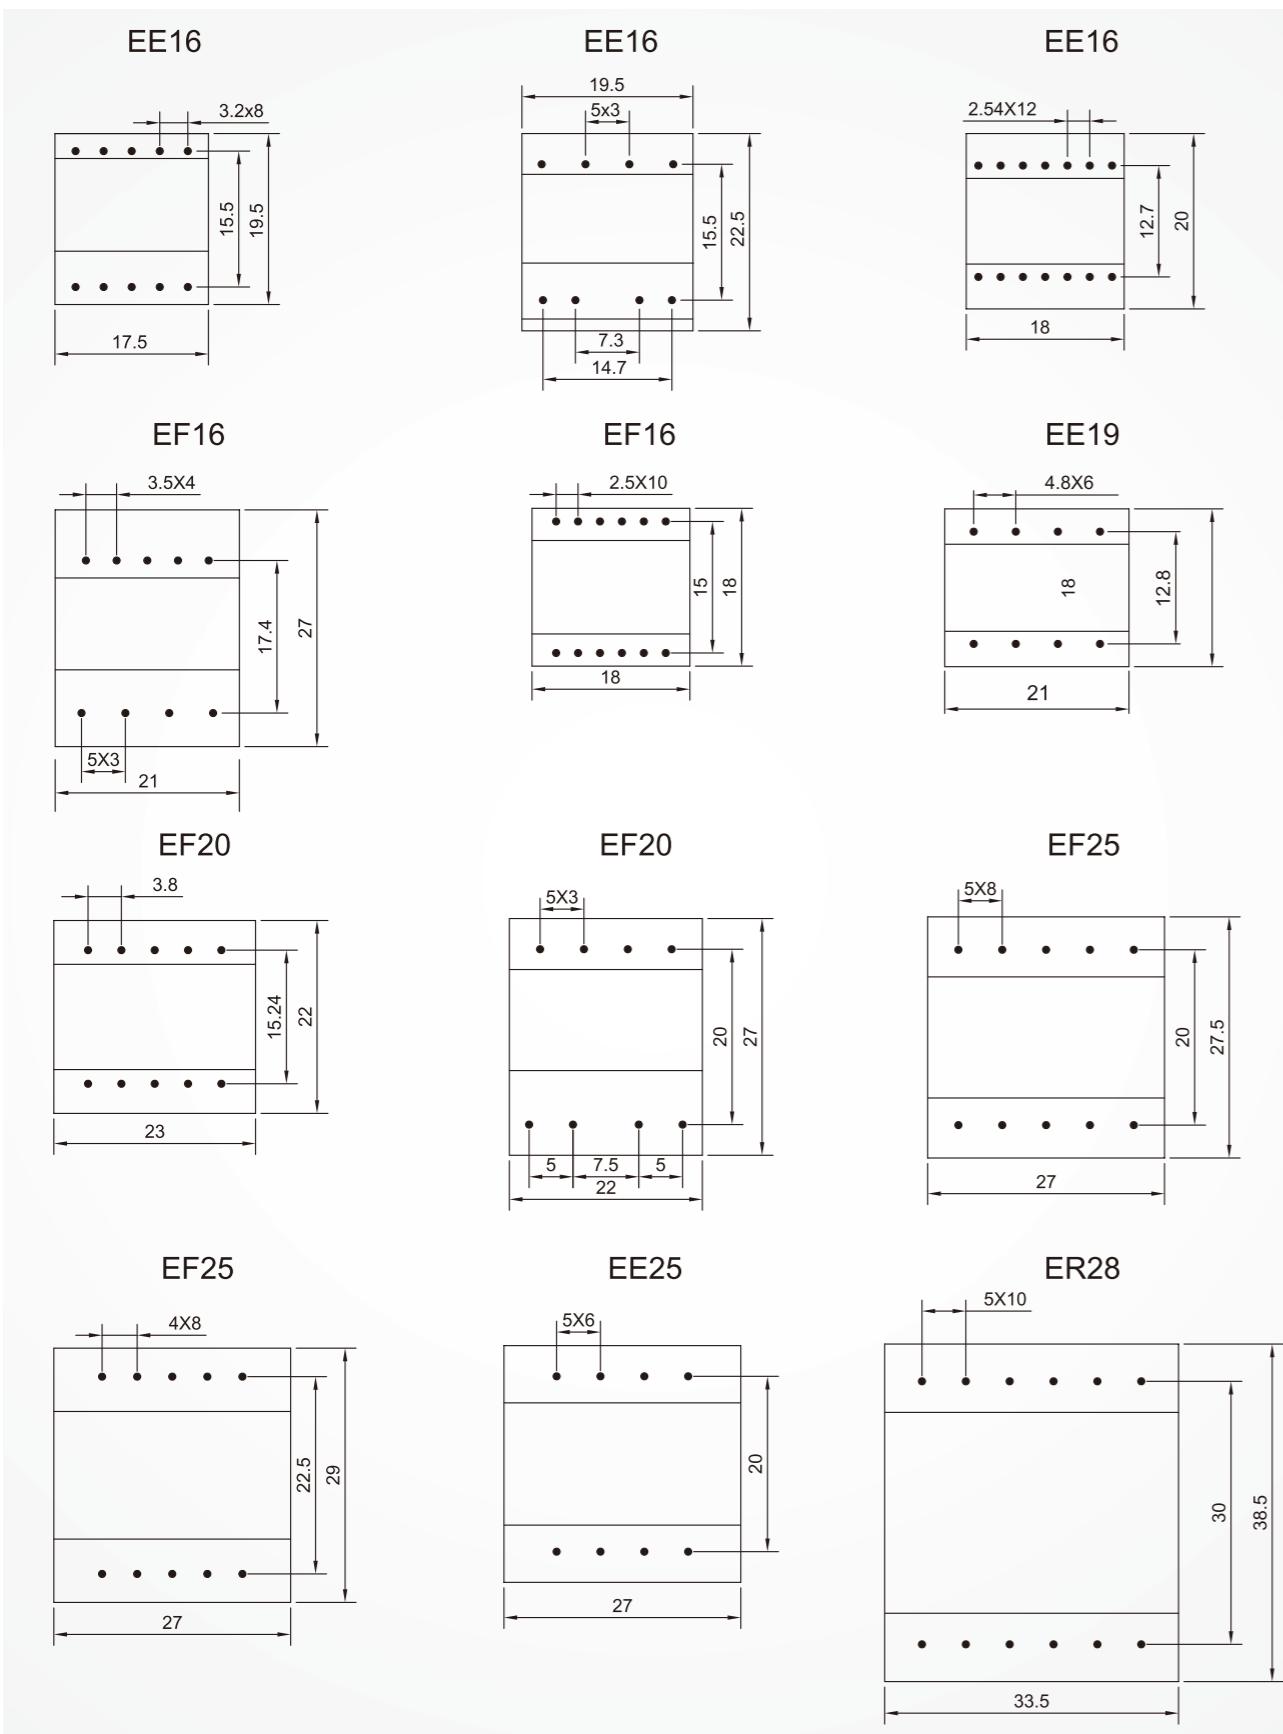


SIZE E16

SINGLE OUTPUT: 5 or 12v


PIN 3 Removed
PCB Hole Diameter = 1.1mm

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16700	1.5w	Pri S1	10-9	85-265Vrms 3.3-6Vdc	0.28Apeak 0.4Adc	6000μH	< 85°C	44KHZ
XZM-E16701	1.5w	Pri S1	10-9	85-265Vrms 7.5-15Vdc	0.28Apeak 0.2Adc	6000μH	< 85°C	44KHZ
XZM-E16702	3.1w	Pri S1	10-9	85-265Vrms 3.3-6Vdc	0.34Apeak 0.9Adc	4200μH	< 70°C	44KHZ
XZM-E16703	3.1w	Pri S1	10-9	85-265Vrms 7.5-15Vdc	0.34Apeak 0.4Adc	4200μH	< 70°C	44KHZ
XZM-E16704	9w	Pri S1	10-9	85-265Vrms 3.3-6Vdc	0.48Apeak 1.5Adc	2100μH	< 60°C	132KHZ
XZM-E16705	9w	Pri S1	10-9	85-265Vrms 7.5-15Vdc	0.48Apeak 0.9Adc	2100μH	< 60°C	132KHZ

MECHANICAL SPECIFICATION 尺寸图

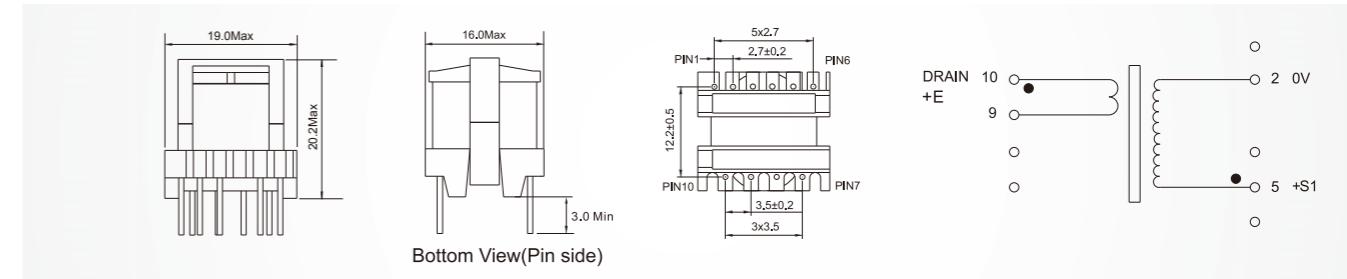

SCHEMATIC 原理图

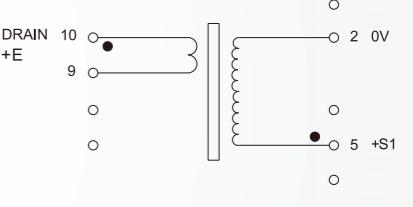


SIZE E16

SINGLE OUTPUT: 5/12v


PIN 3 Removed
PCB Hole Diameter = 1.1mm

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16706	5w	Pri Aux S1 S2	4-6 2-1 9-10 7-8	85-265Vrms 7-14Vdc 3.3-7Vdc 8-17Vdc	0.27Apeak 0.1Adc 1.2Adc 0.4Adc	3900μH	< 70°C	132KHZ
XZM-E16707	12w	Pri Aux S1 S2	4-6 2-1 9-10 7-8	185-265Vrms 7-14Vdc 3.3-7Vdc 8-17Vdc	0.55Apeak 0.1Adc 2.0Adc 1Adc	1660μH	< 50°C	132KHZ

MECHANICAL SPECIFICATION 尺寸图

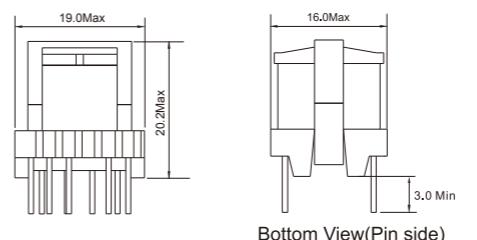

SCHEMATIC 原理图

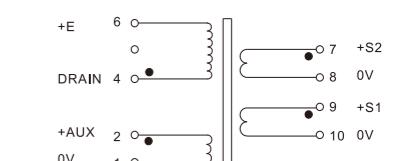


PIN 3 Removed
PCB Hole Diameter = 1.1mm

SIZE E16

SINGLE OUTPUT:5 or 12v

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16708	6W	Pri	4-6	85-265Vrms	0.35Apeak	3000μH	< 60°C	132KHZ
		Aux	2-1	8-16Vdc	0.1Adc			
		S1	9-10	3-6Vdc	1.2Adc			
XZM-E16709	6W	Pri	4-6	85-265Vrms	0.38Apeak	3000μH	< 60°C	132KHZ
		Aux	2-1	8.5-17Vdc	0.1Adc			
		S1	9-10	9-18Vdc	0.5Adc			


MECHANICAL SPECIFICATION 尺寸图

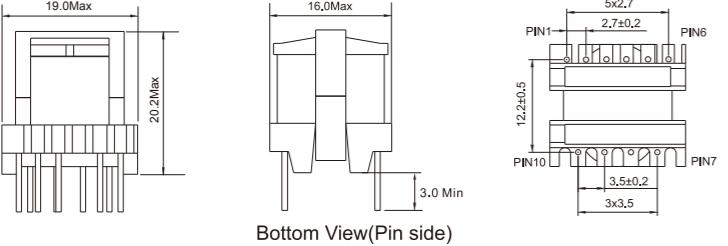

Bottom View(Pin side)

PIN 3 Removed PCB Hole Diameter = 1.1mm

SCHEMATIC 原理图

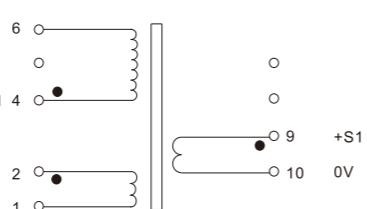


SIZE E16

DUAL OUTPUT:3.3+5V

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16710	6W	Pri	4-6	85-265Vrms	0.35Apeak	3000μH	< 60°C	132KHZ
		Aux	2-1	8-16Vdc	0.1Adc			
		S1	9-10	2-4Vdc	1.8Adc			
		S2	7-10	3-6(VOR)	1.2Adc			


MECHANICAL SPECIFICATION 尺寸图

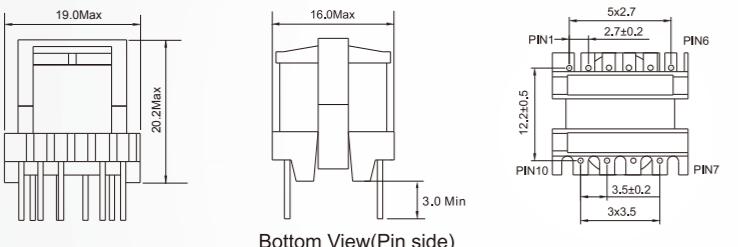

Bottom View(Pin side)

PIN 3 Removed PCB Hole Diameter = 1.1mm

SCHEMATIC 原理图

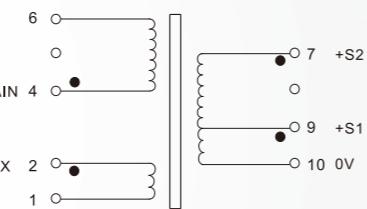


SIZE E16

2 OUTPUT:2x24V

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16711	12W	Pri	4-6	185-265Vrms	0.5Apeak	1800μH	< 50°C	132KHZ
		Aux	2-1	9-18Vdc	0.2Adc			
		S1	9-10	15-30Vdc	0.4Adc			
		S2	7-8	15-30Vdc	0.4Adc			


MECHANICAL SPECIFICATION 尺寸图

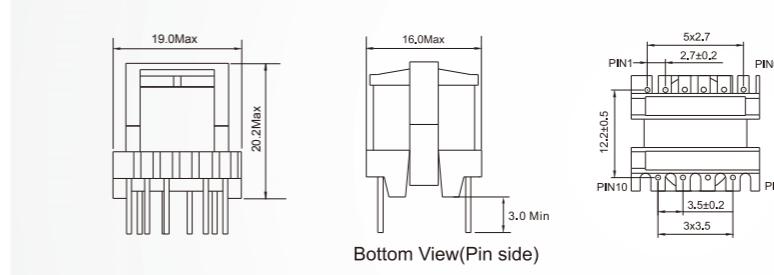

Bottom View(Pin side)

PIN 3 Removed
PCB Hole Diameter = 1.1mm

SCHEMATIC 原理图



PIN 3 Removed PCB Hole Diameter = 1.1mm

TYPICAL OUTPUTS


- +24V 0.5A with S1-S2 in parallel
- +48V 0.25A with S1-S2 in series(8-9connected)
- +15V/-15V 0.4A with pins 8-9 connected to 0V

SIZE E16

3 OUTPUT:5/15/24V

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E16712	12W	Pri	4-6	185-265Vrms	0.5Apeak	1800μH	< 50°C	132KHZ
		Aux	2-1	12Vdc	0.2Adc			
		S1	9-10	5Vdc	1.5Adc			
		S2	8-10	15Vdc	0.6Adc			
		S3	7-10	24Vdc	0.4Adc			


MECHANICAL SPECIFICATION 尺寸图

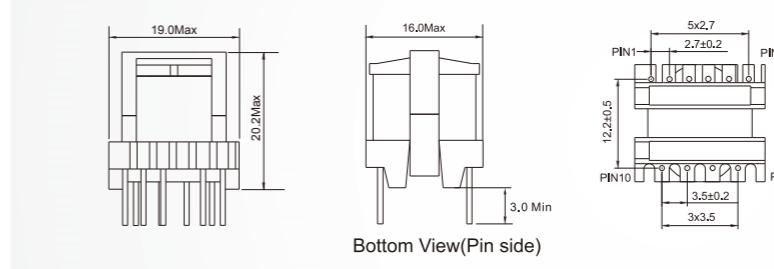

Bottom View(Pin side)

PIN 3 Removed
PCB Hole Diameter = 1.1mm

SCHEMATIC 原理图



PIN 3 Removed PCB Hole Diameter = 1.1mm

SIZE E19

2 OUTPUT:5/12V


PCB Hole Diameter = 1mm

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E19100	18w	Pri	4-6	85-265Vrms	0.8Apeak	1250μH	< 50°C	132KHZ
		Aux	2-1	7-12Vdc	0.1Adc			
		S1	9-10	3.3-7Vdc	3Adc			
		S2	7-8	8-16.5Vdc	1.4Adc			
XZM-E19101	18w	Pri	4-6	85-265Vrms	1.1Apeak	900μH	< 50°C	100KHZ
		Aux	2-1	7-12Vdc	0.1Adc			
		S1	9-10	3.3-7Vdc	3Adc			
		S2	7-8	8-16.5Vdc	1.4Adc			


5 OUTPUT:3.3/5/12/18/30V

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E19102	16w	Pri	9-10	85-265Vrms	0.85Apeak	1250μH	<60°C	132KHZ
		Aux	8-7	15Vdc	0.2Adc			
		S1	5-6	3.3Vdc	2Adc			
		S2	4-6	5Vdc	Sum S1+S2			
		S3	3-6	12Vdc	0.8Adc			
		S4	2-6	18Vdc	0.8Adc			
		S5	1-6	30Vdc	0.2Adc			

MECHANICAL SPECIFICATION 尺寸图

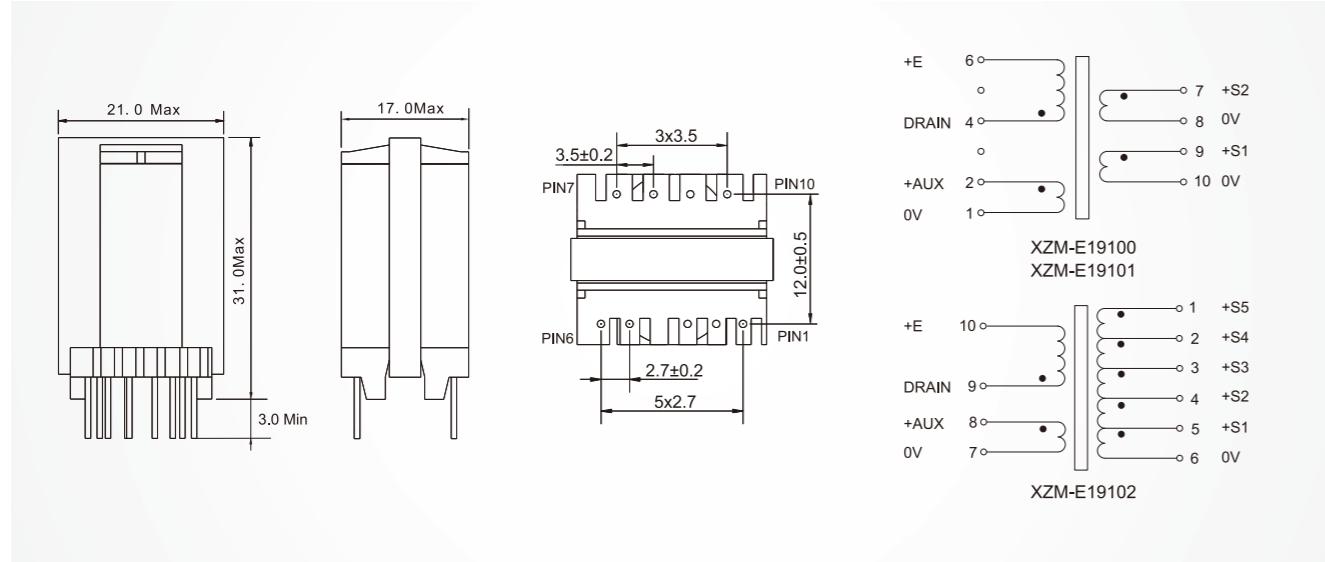

SCHEMATIC 原理图

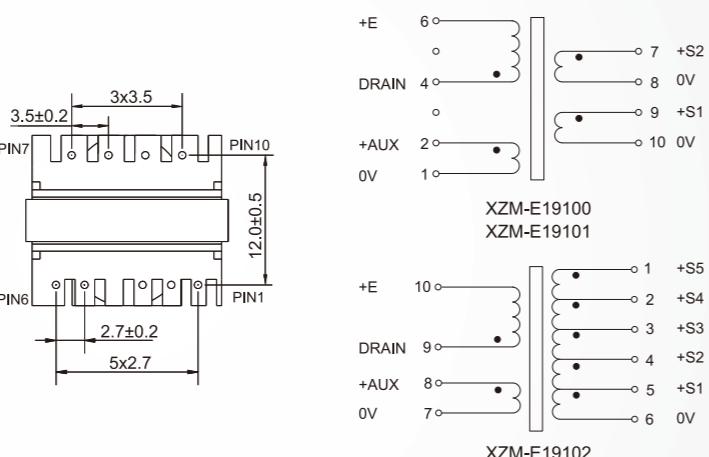


SIZE E20

2 or 3 OUTPUTS:5/5v or 12/12v or 3.3+5/12v


PIN 3 Removed
PCB Hole Diameter=1.2mm

Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E20700	24w	Pri	4-5	185-265Vrms	1.0Apeak	1000μH	< 50°C	132KHZ
		Aux	2-1	11-18Vdc	0.3Adc			
		S1	6-7	9-15Vdc	1.5Adc			
		S2	9-10	9-15Vdc	1.5Adc			
XZM-E20701	20w	Pri	4-5	185-265Vrms	0.9Apeak	1100μH	< 50°C	132KHZ
		Aux	2-1	15Vdc	0.3Adc			
		S1	7-8	3.3Vdc	3Adc			
		S2	6-8	5Vdc	Sum S1+S2			
		S3	9-10	12Vdc	1.3Adc			
XZM-E20702	20w	Pri	4-5	185-265Vrms	0.85Apeak	1300μH	< 50°C	132KHZ
		Aux	2-1	7-18Vdc	0.3Adc			
		S1	6-7	3-7.5Vdc	2.0Adc			
		S2	9-10	3-7.5Vdc	2.0Adc			


MECHANICAL SPECIFICATION 尺寸图

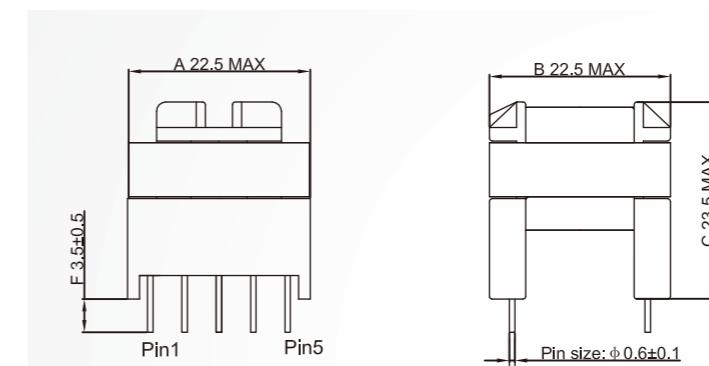

SCHEMATIC 原理图

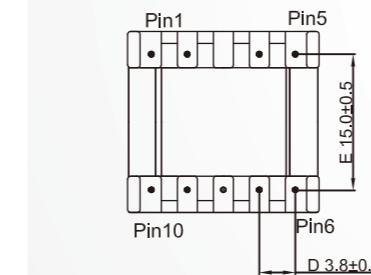

PCB Hole Diameter=1.2mm

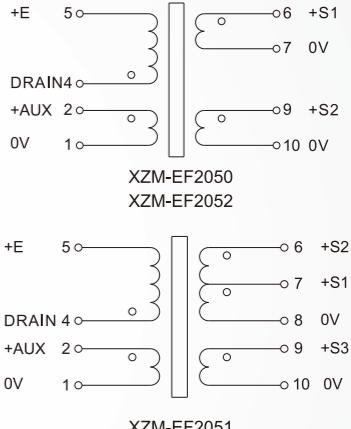


SIZE E25

3 or 1 OUTPUTS:5+12/12v or 24v


Order Number	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-E25700	30w	Pri	3-5	185-265Vrms	1.5Apeak	750μH	< 50 °C	132KHZ
		Aux	2-1	7-14.5Vdc	1Adc			
		S1	7-8	3.3-7Vdc	3Adc			
		S2	6-8	8-16Vdc	1.5Adc			
		S3	9-10	8-16Vdc	1.5Adc			
XZM-E25701	35w	Pri	3-5	185-265Vrms	1.1Apeak	1100μH	< 50 °C	132KHZ
		Aux	2-1	8-16Vdc	1Adc			
		S1	6-10	15-30Vdc	1.4Adc			

Note for XZM-E25700 : S2 and S3 can be connected in series or in parallel

MECHANICAL SPECIFICATION 尺寸图

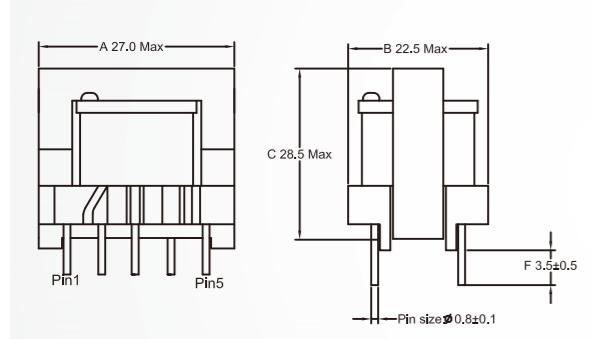

SCHEMATIC 原理图

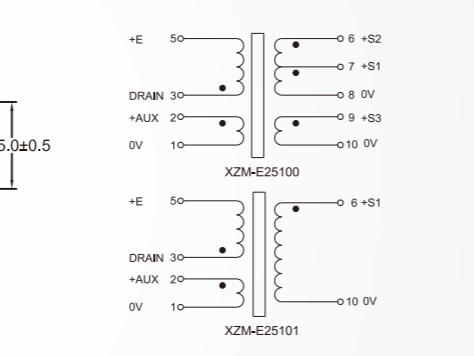


SIZE ERL28

5 OUTPUTS:3.3/5/12/18/30v


Part NO	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-EC2850	60w	Pri	5-1	185-265Vrms	3.0Apeak	500μH	< 50 °C	60 or 132KHZ
		Aux	8-9	15Vdc	0.5Adc			
		S1	14+15/12+13	3.3Vdc	7Adc			
		S2	11/12+13	5Vdc	Sum S1+S2			
		S3	16-10	12Vdc	2Adc			
		S4	17-10	18Vdc	2Adc			
		S5	18-10	30Vdc	0.5Adc			

MECHANICAL SPECIFICATION 尺寸图

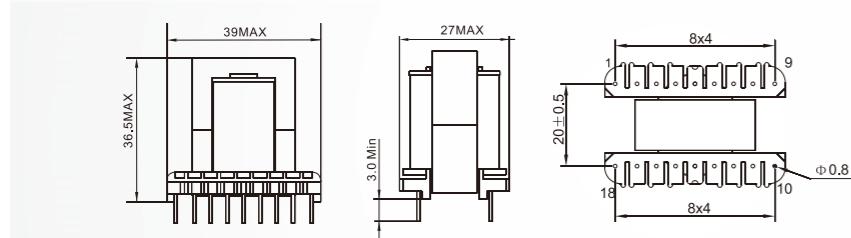

PCB Hole Diameter=1.3mm

SCHEMATIC 原理图

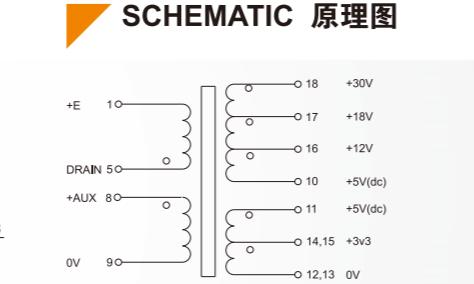


SIZE ETD29

4 OUTPUTS:5+12/5+12v

Part NO	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-ED2950	60w	Pri	5-7	185-265Vrms	3.0Apeak	500μH	< 50 °C	60 or 132KHZ
		Aux	3-2	7-14.5Vdc	0.5Adc			
		S1	12-13	3.3-7Vdc	4Adc			
		S2	11-13	8-16.5Vdc	2.5Adc			
		S3	9-10	3.3-7Vdc	4Adc			
		S4	8-10	8-16.5Vdc	2.5Apeak			


Note:S1/S3 or S2/S4 can be connected in series or in parallel

MECHANICAL SPECIFICATION 尺寸图

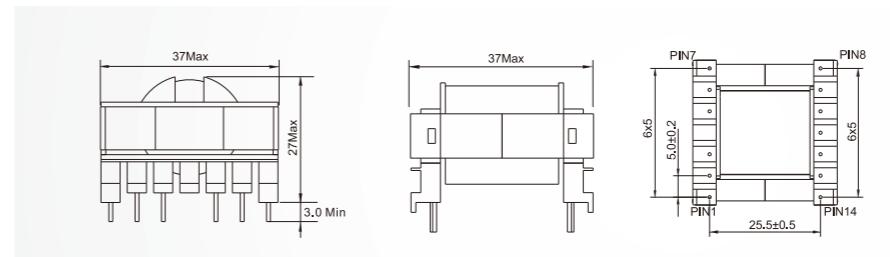

PIN 4 Removed PCB Hole Diameter=1.3mm

SCHEMATIC 原理图

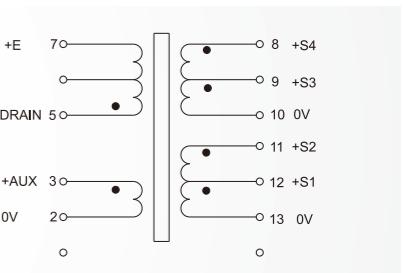


SIZE ETD34

4 OUTPUTS:5+12/5+12v

Part NO	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-ED3450	90w	Pri	5-7	185-265Vrms	2.8Apeak	500μH	< 50 °C	132KHZ
		Aux	3-2	7-14Vdc	0.5Adc			
		S1	12-13	3.3-6.5Vdc	5Adc			
		S2	11-13	8.5-17Vdc	3Adc			
		S3	9-10	3.3-6.5Vdc	5Adc			
		S4	8-10	8.5-17Vdc	3Adc			


Note:S1/S3 or S2/S4 can be connected in series or in parallel

MECHANICAL SPECIFICATION 尺寸图

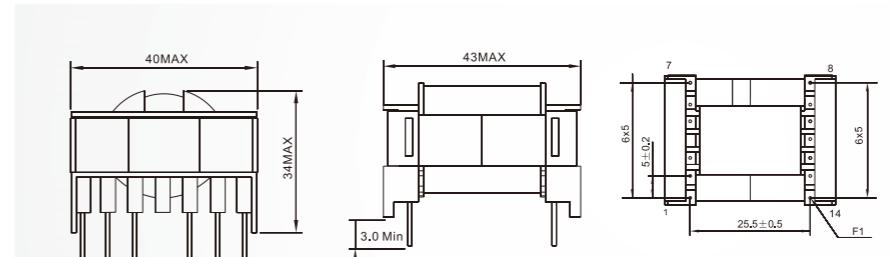

PIN 4 Removed PCB Hole Diameter=1.5mm

SCHEMATIC 原理图

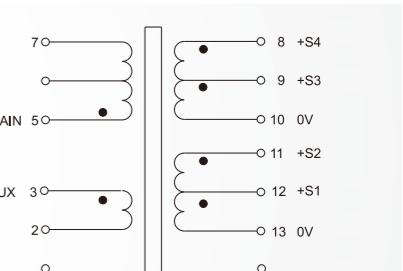


SIZE ETD39

4 OUTPUTS:5+12/5+12v

Part NO	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-ED3950	140w	Pri	5-7	185-265Vrms	4Apeak	440μH	< 50 °C	132KHZ
		Aux	3-2	7-14Vdc	0.5Adc			
		S1	14-15	3.3-6.5Vdc	5Adc			
		S2	13-15	8.5-17Vdc	5Adc			
		S3	11-12	3.3-6.5Vdc	5Adc			
		S4	10-12	8.5-17Vdc	5Adc			

MECHANICAL SPECIFICATION 尺寸图

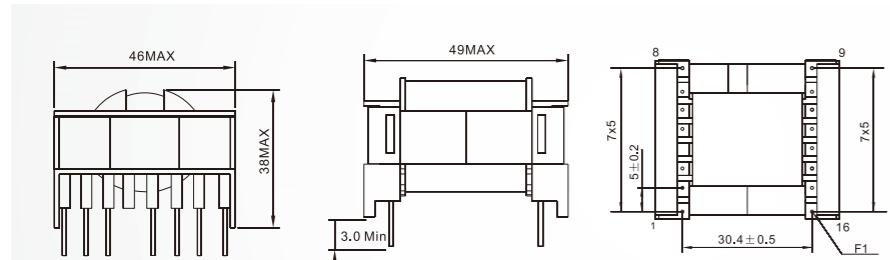

PIN 4 Removed PCB Hole Diameter=1.5mm


SIZE ETD44

4 OUTPUTS:5+12/5+12v

Part NO	Output Power Maximum	Windings					Ambient Temperature	Frequency
			Pins	Voltage	Current Maximum	Inductance (+/-10%)		
XZM-ED4450	180w	Pri	5-7	185-265Vrms	8Apeak	300μH	< 50 °C	60 or 132KHZ
		Aux	3-2	7-14Vdc	0.5Adc			
		S1	16-17	3.3-6.5Vdc	6Adc			
		S2	15-17	8.5-17Vdc	5Adc			
		S3	13-14	3.3-6.5Vdc	6Adc			
		S4	12-14	8.5-17Vdc	5Adc			

Note:S1/S3 or S2/S4 can be connected in series or in parallel

MECHANICAL SPECIFICATION 尺寸图

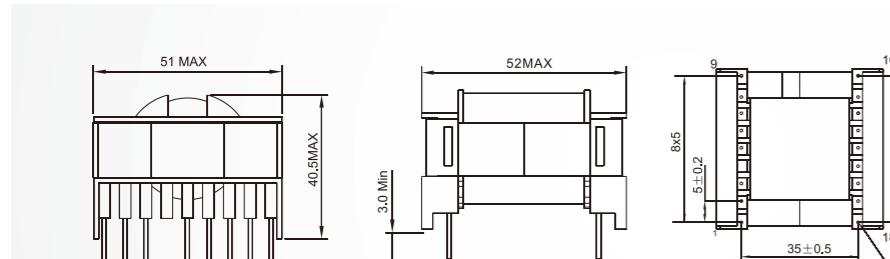

PIN 4 Removed PCB Hole Diameter=1.5mm

DC TO AC HIGH INSULATION AND STEP-UP TRANSFORMER



FEATURES

- Vacuum Filling
- Excellent Power Densities
- Multiple groove bobbin design
- High efficiency, Low Temperature Rise
- DC-AC design ,High output voltage
- Primary/Secondary Insulation ≥3750V
- Operating temperature from -40°C to 85°C
- Storage temperature from -40°C to 120°C
- Uses UL94-V0 listed materials

产品特点

- 真空灌封
- 功率密度大
- 多沟槽骨架设计
- 低温升，高效率
- 直流转交流设计，输出电压高
- 初级/次级绝缘缘大于或等于3750V
- 工作温度范围：-40°C ~ 85°C
- 储存温度范围：-40°C ~ 120°C
- 使用UL94-V0绝缘材料


MECHANICAL SPECIFICATION 尺寸图

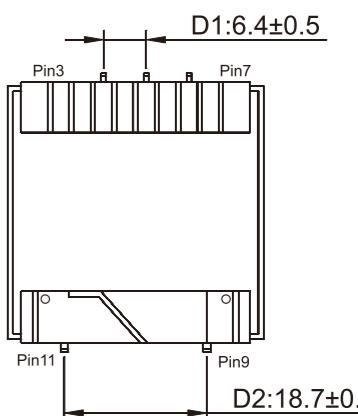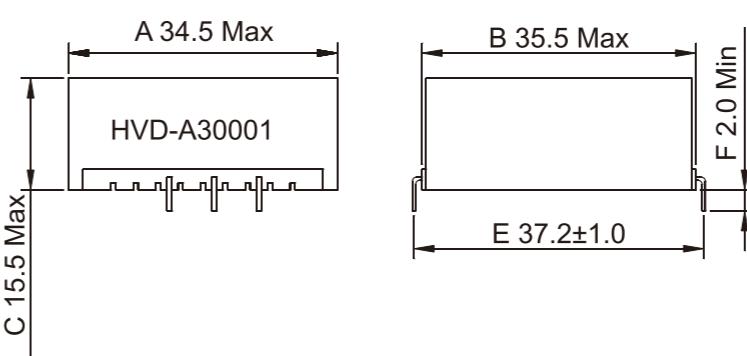

ELECTRICAL SPECIFICATION 电气规格

Item 项目	Specification 性能参数
Input voltage 输入电压	DC12-24V
Output voltage 输出电压	AC1000V~8000V
Power 功率	5W~80W

SCHEMATIC 原理图

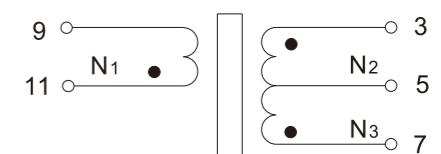

ADVANTAGES 优势

Compare with traditional open frame design which is easy to cause high voltage discharge and burn, our DC-AC High insulation and Step-up transformers have more advantages. It utilizes the Multiple groove bobbin design and full vacuum potting process to achieve reinforced insulation and safety, well against dust and humidity, anti-shock and has compact construction etc.

我司新开发设计的DC-AC升压变压器与传统的DC-AC升压变压器相比较，具有明显优点。传统的DC-AC升压变压器，采用敞开式的结构，此结构变压器容易产生高压放电现象而造成烧机。而我司采用完全真空灌胶工艺灌胶、多槽分压骨架设计。使得产品具有高绝缘、高安全的特点。另外，产品具有防潮湿、耐腐蚀、耐冲击及单位体积的输出功率大、结构紧凑等特点。

APPLICATION 适用场合

Suitable for LCD TV, LCD Indicator, Anion generator, Ozonizer etc.


适用于液晶电视、液晶显示器、负离子发生器、臭氧发生器等。

SIZE E25

ELECTRICAL SPECIFICATION 电气规格

Order Number	Common Mode (mH) Min	Rated Current Irms(Amp)	Resistance per Winding (ohm)Max	Inductance Differential Mode (μH)Min	Resonant Frequency (kHz)Min
XZM-E25102	22	0.9	0.54	130	170
XZM-E25103	15	1.1	0.35	90	210
XZM-E25104	10	1.3	0.22	50	270
XZM-E25105	4.7	1.8	0.105	25	400
XZM-E25106	2.2	2.7	0.05	11	630
XZM-E25107	1	4	0.03	7	950

MECHANICAL SPECIFICATION 尺寸图

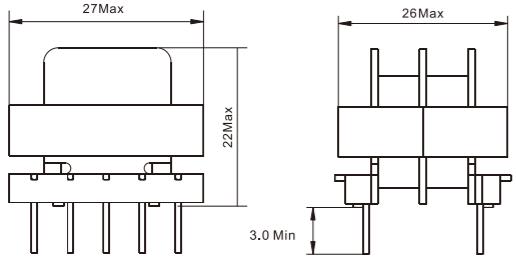

View from pin side PCB Drilling diameter 1.2mm

U9.8 Series



FEATURES

- Reduces conductive EMI emission
- High inductance, compact size
- Rated Voltage: 250V AC
- Operating temperature : -25°C ~ 105°C (Temperature rise included)
- Storage temperature: -25°C ~ 105°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V


产品特点

- 降低EMI传导干扰
- 高感量，小体积
- 额定电压：250V AC
- 产品操作温度范围：-25°C ~ 105°C (包括产品温升)
- 储存温度范围：-25°C ~ 105°C
- 使用UL94-V0绝缘材料
- 测量频率：1KHz , 0.25V
- 介电强度：1500Vrms , 60Sec
- 绝缘电阻：100MΩ Min @ 500VDC


ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Inductance common Mode (mH) Min	Resistance per winding (Ω) Max	Rated Current Arms (Amp) temperature rise 40°C (△T=40°C)
XZM-U10100	33	5.6	0.20
XZM-U10101	18	3.5	0.30
XZM-U10102	10	2.0	0.40
XZM-U10103	4.7	0.95	0.60
XZM-U10104	2.2	0.35	0.95
XZM-U10105	1.0	0.12	1.25


MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图

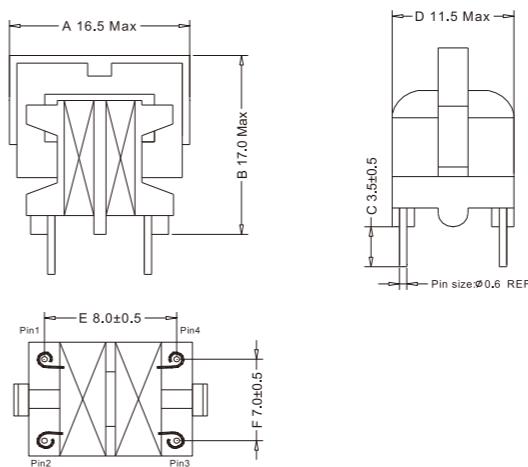

SCHEMATIC 原理图

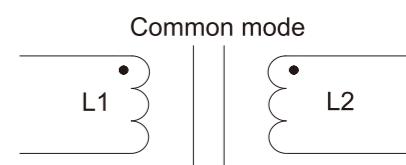

Typical Temperature Rise Characteristics 典型温升特性

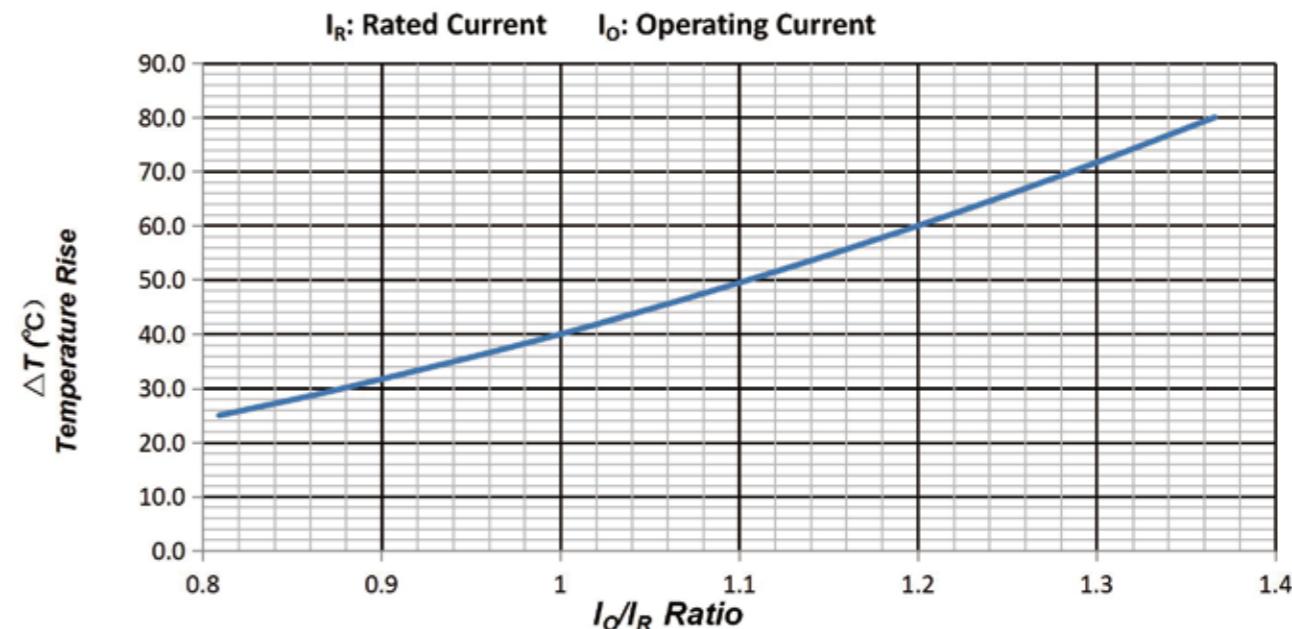

U10.5 Series



FEATURES

- Reduces conductive EMI emission
- High inductance, compact size
- Rated Voltage: 250V AC
- Operating temperature : -40°C ~ 105°C
(Temperature rise included)
- Storage temperature: -40°C ~ 105°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V.
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V


产品特点

- 降低EMI传导干扰
- 高感量，小体积
- 额定电压：250V AC
- 产品操作温度范围：-40°C ~ 105°C
(包括产品温升)
- 储存温度范围：-40°C ~ 105°C
- 使用UL94-V0绝缘材料
- 测量频率：1KHz , 0.25V
- 介电强度：1500Vrms , 60Sec
- 绝缘电阻：100MΩ Min @ 500VDC


ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Inductance common Mode (mH) Min	Resistance per winding (Ω) Max	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40^\circ\text{C}$)
XZM-U11200	47	2.10	0.40
XZM-U11201	33	1.50	0.50
XZM-U11202	22	1.00	0.60
XZM-U11203	15	0.75	0.70
XZM-U11204	10	0.50	0.85
XZM-U11205	6.8	0.35	1.00
XZM-U11206	4.7	0.25	1.20
XZM-U11207	3.3	0.18	1.40
XZM-U11208	2.2	0.12	1.70
XZM-U11209	1.5	0.09	2.00
XZM-U11210	1.0	0.07	2.30


MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图

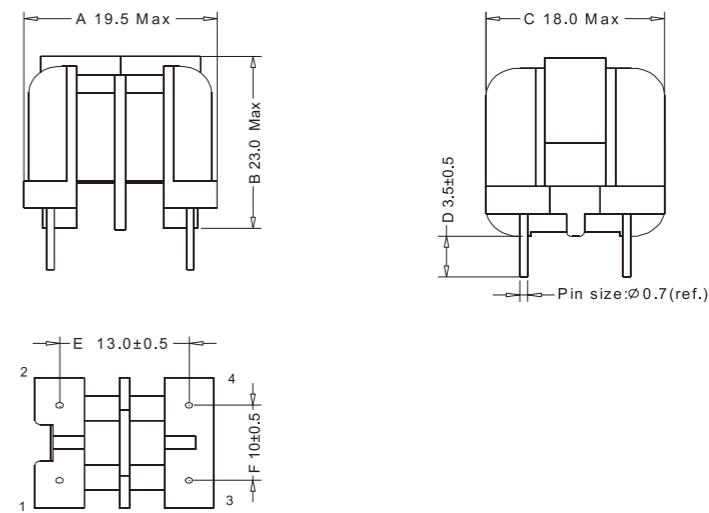

SCHEMATIC 原理图

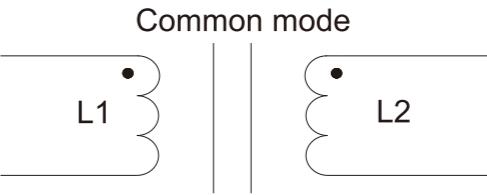

Typical Temperature Rise Characteristics 典型温升特性

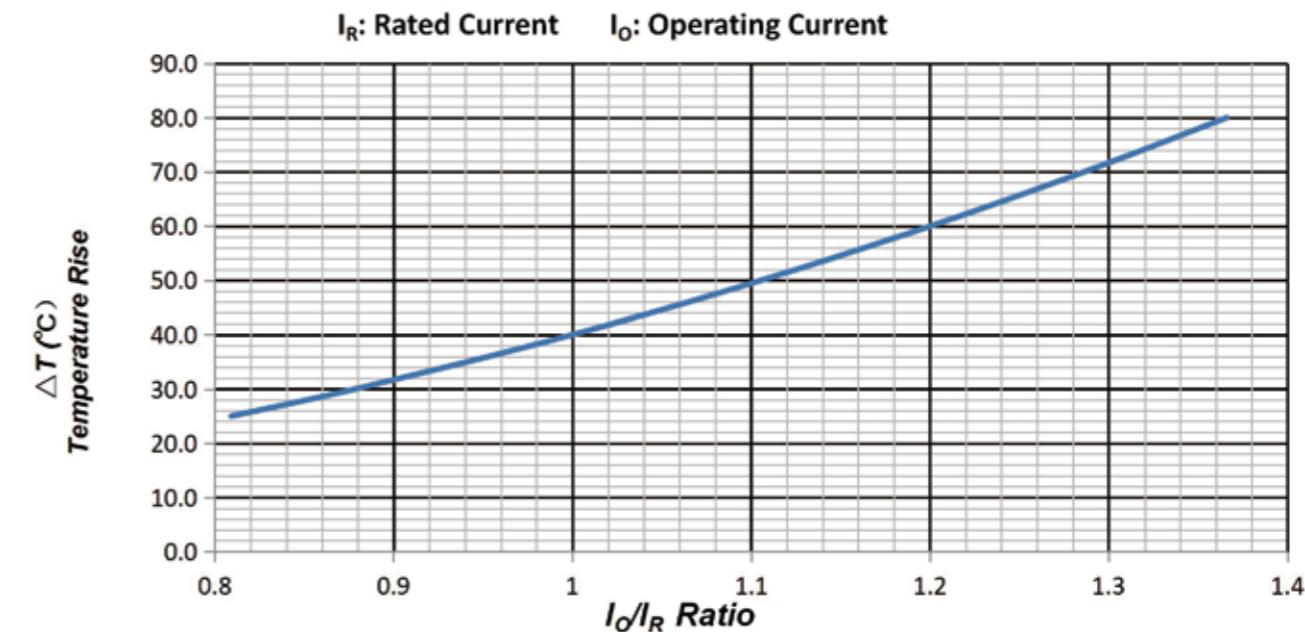

U16 Series



FEATURES

- Reduces conductive EMI emission
- High inductance, compact size
- Rated Voltage: 250V AC
- Operating temperature : -25°C ~ 105°C
(Temperature rise included)
- Storage temperature: -25°C ~ 105°C
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V.
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V


产品特点

- 降低EMI传导干扰
- 高感量，小体积
- 额定电压：250V AC
- 产品操作温度范围：-25°C ~ 105°C
(包括产品温升)
- 储存温度范围：-25°C ~ 105°C
- 使用UL94-V0绝缘材料
- 测量频率：1KHz , 0.25V
- 介电强度：1500Vrms , 60Sec
- 绝缘电阻：100MΩ Min @ 500VDC


ELECTRICAL SPECIFICATION@25±2°C 电气规格

Part Number	Inductance common Mode (mH) Min	Resistance per winding (Ω) Max	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40^\circ\text{C}$)
XZM-U16146	22	0.50	0.90
XZM-U16147	15	0.35	1.15
XZM-U16148	10	0.25	1.45
XZM-U16149	6.8	0.16	1.70
XZM-U16150	4.7	0.13	1.90
XZM-U16151	3.3	0.09	2.20
XZM-U16152	2.2	0.07	2.70
XZM-U16153	1.5	0.05	3.20
XZM-U16154	1.0	0.04	3.80


MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图

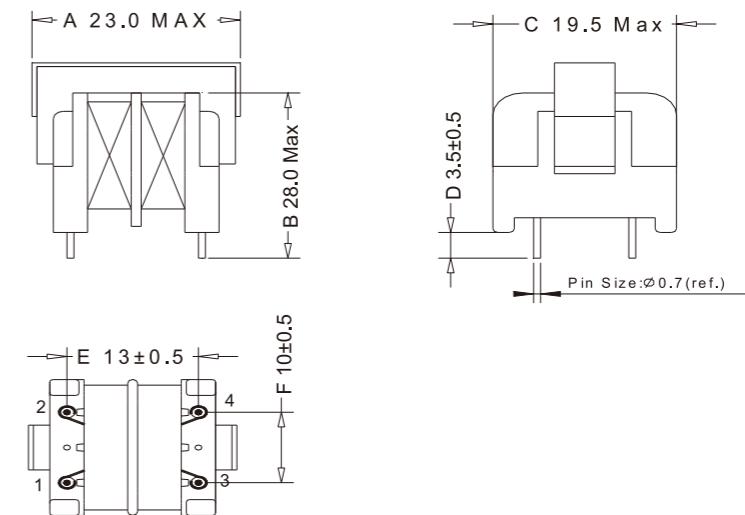


SCHEMATIC 原理图

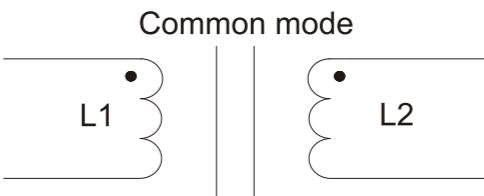

Typical Temperature Rise Characteristics 典型温升特性

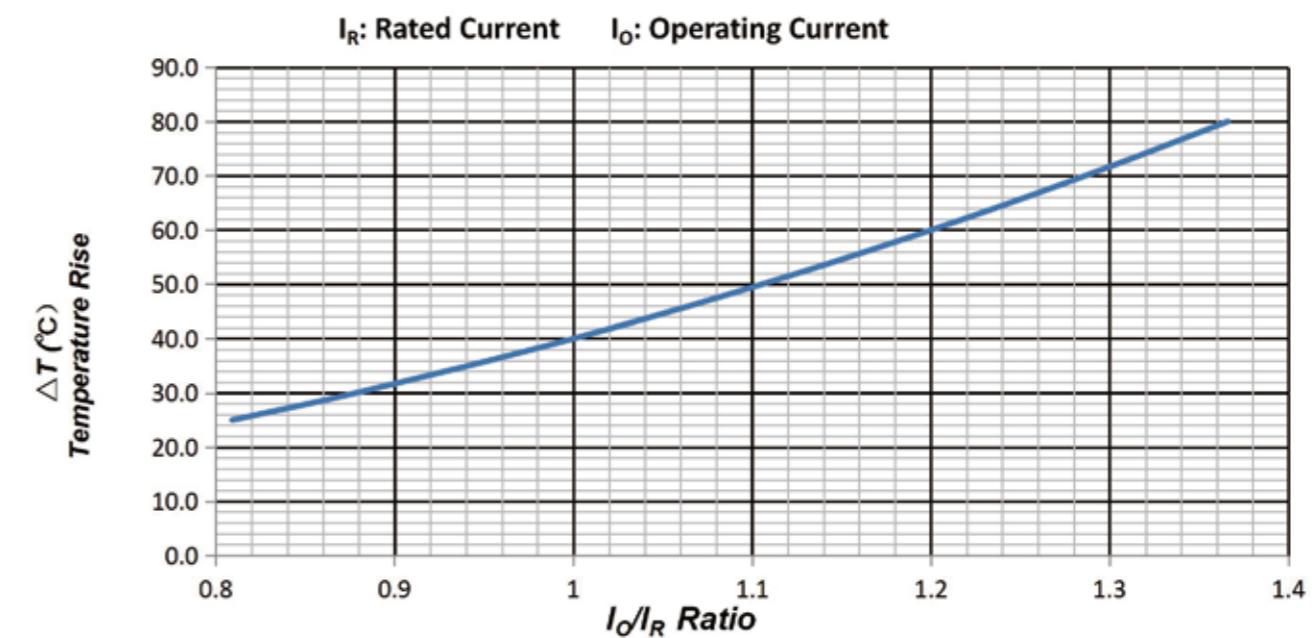

UC12 Series

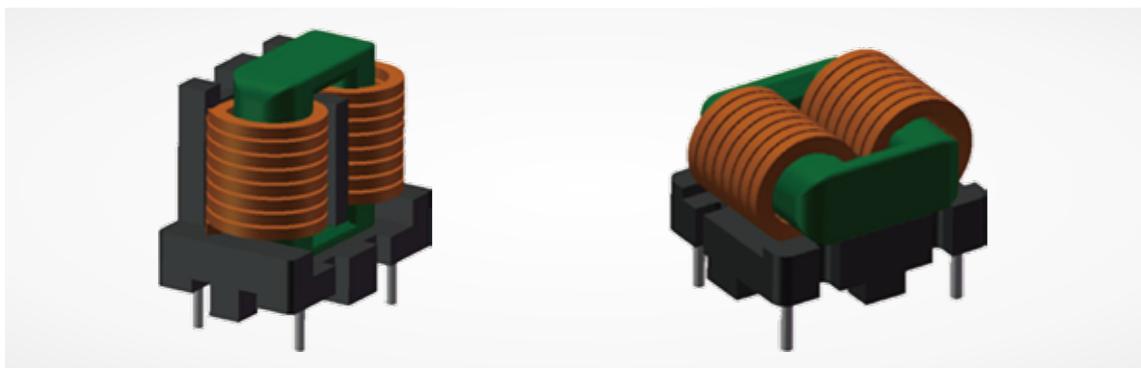

FEATURES

- Rated Voltage: 250V AC
- Operating temperature : -25°C ~ 105°C
(Temperature rise included)
- Storage temperature: -25°C ~ 105°C
- Enameled Copper Wire: Class H (180°C)
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V
- Inductance difference value of two windings must less than 2% of single winding inductance.
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V

产品特点


- 额定电压 : 250V AC
- 产品操作温度范围 : -25°C ~ 105°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 105°C
- 漆包铜线 : H级 (180°C)
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 0.25V
- 两绕组电感差值小于单绕组电感的2%。
- 介电强度 : 1500Vrms , 60Sec
- 绝缘电阻 : 100MΩ Min @ 500VDC

ELECTRICAL SPECIFICATION@25±2°C 电气规格



Part Number	Inductance common Mode (mH) Min	Inductance differential Mode (uH) Typical	Resistance per winding (mΩ) Max	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40°C$)	Replacing traditional Toroid model
XZM-UC1205mH	5.0	31	85	2.0	T12*6*4, UU9.8
XZM-UC1208mH	8.0	50	135	1.65	
XZM-UC1210mH	10.0	58	180	1.50	
XZM-UC1215mH	15.0	87	240	1.25	

MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图


Vertical version 立式

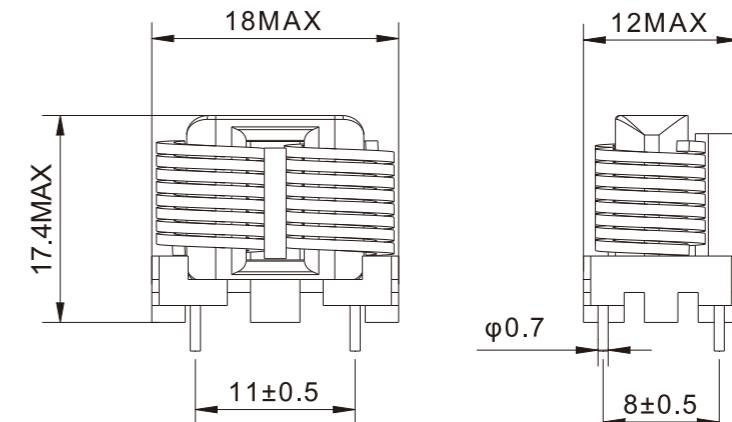


Horizontal Version 卧式




Typical Impedance Characteristics 典型阻抗特性

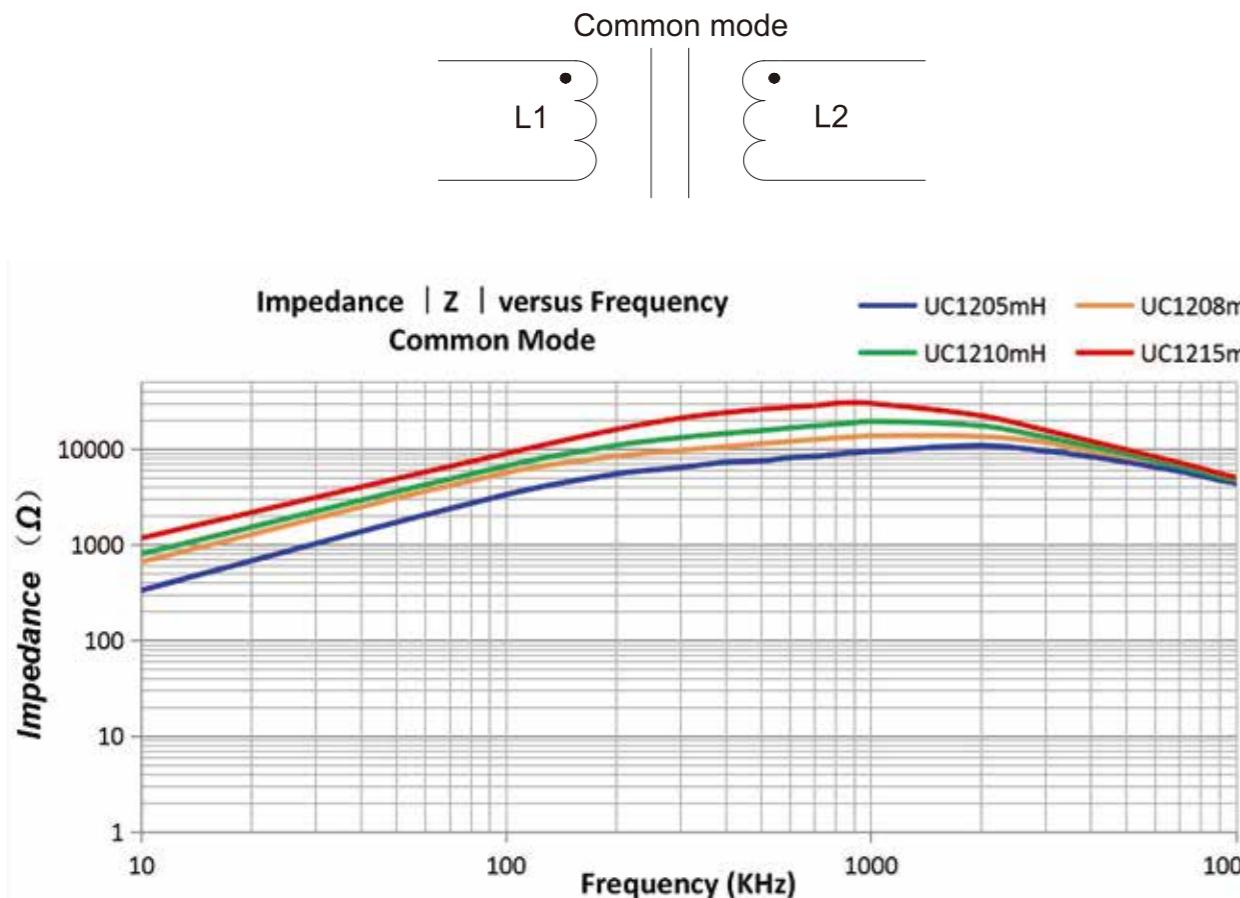

Typical Temperature Rise Characteristics 典型温升特性

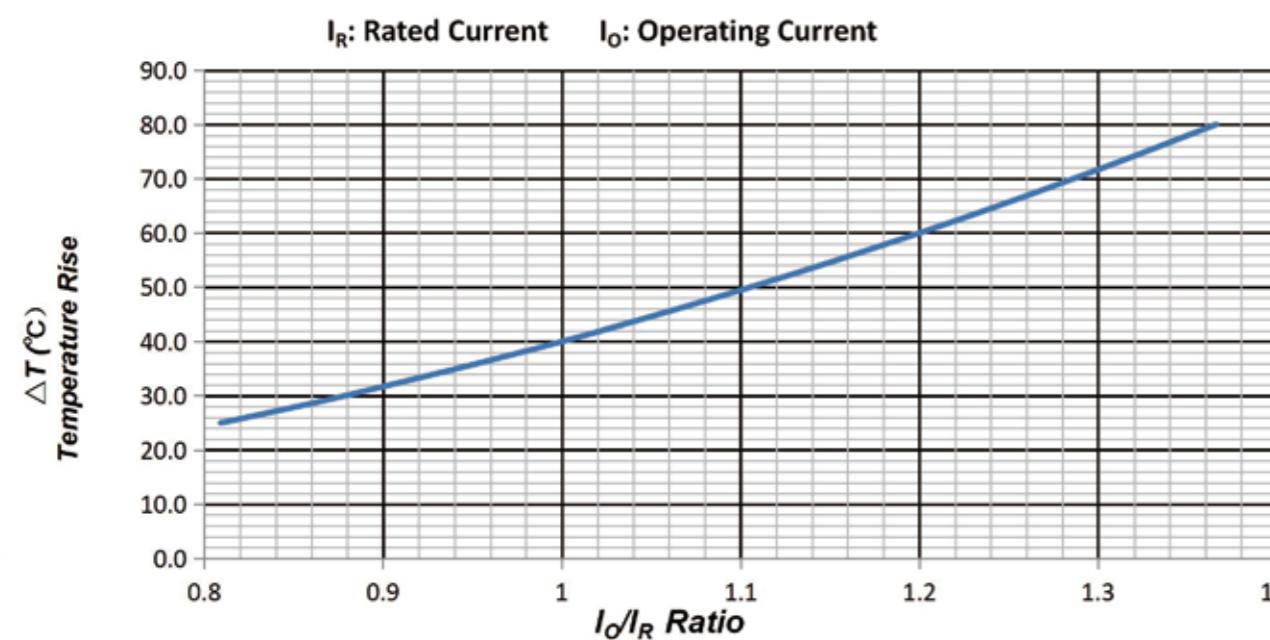

UC15 Series

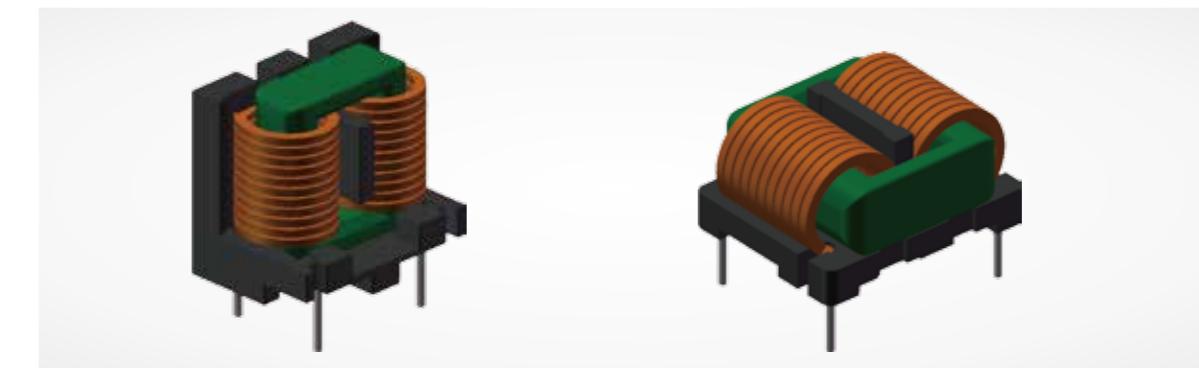

FEATURES

- Rated Voltage: 250V AC
- Operating temperature : -25°C ~ 105°C
(Temperature rise included)
- Storage temperature: -25°C ~ 105°C
- Enameled Copper Wire: Class H (180°C)
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V
- Inductance difference value of two windings must less than 2% of single winding inductance.
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V

产品特点


- 额定电压 : 250V AC
- 产品操作温度范围 : -25°C ~ 105°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 105°C
- 漆包铜线 : H级 (180°C)
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 0.25V
- 两绕组电感差值小于单绕组电感的2%。
- 介电强度 : 1500Vrms , 60Sec
- 绝缘电阻 : 100MΩ Min @ 500VDC

ELECTRICAL SPECIFICATION@25±2°C 电气规格




Part Number	Inductance common Mode (mH) Min	Inductance differential Mode (uH) Typical	Resistance per winding (mΩ) Max	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40$ °C)	Replacing traditional Toroid model
XZM-UC1502mH	2.0	17.5	28	4.8	T16*10*8, UU10.5
XZM-UC1505mH	5.0	39	55	3.2	
XZM-UC1510mH	10.0	92	135	2.1	
XZM-UC1520mH	20.0	123	260	1.4	

MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图


Vertical version 立式

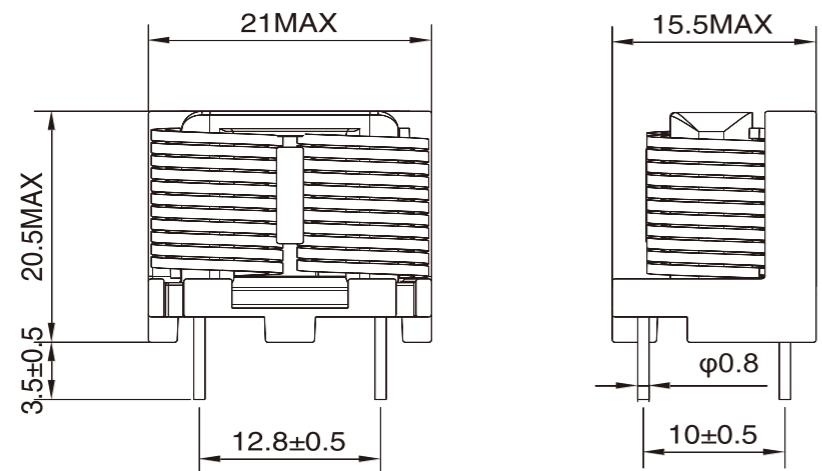

Horizontal Version 卧式

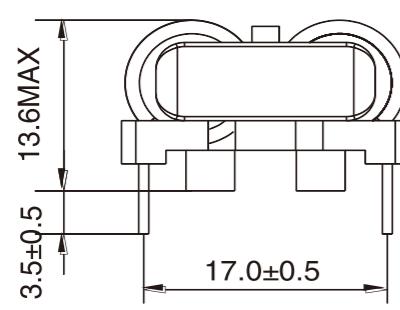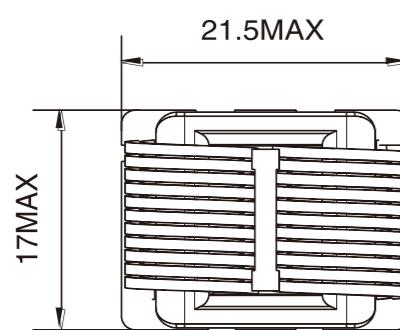


Typical Impedance Characteristics 典型阻抗特性

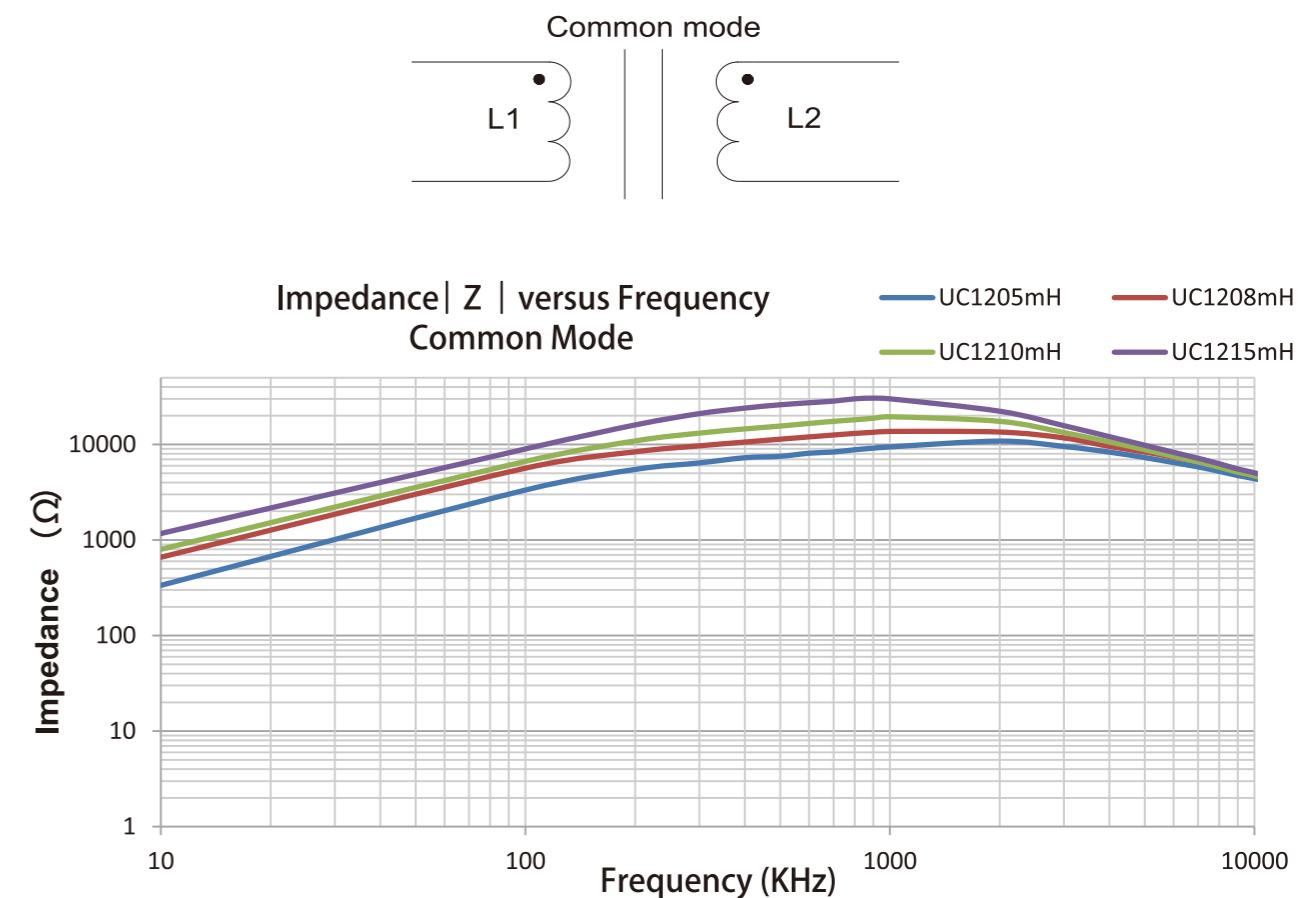


Typical Temperature Rise Characteristics 典型温升特性

I_R : Rated Current I_O : Operating Current

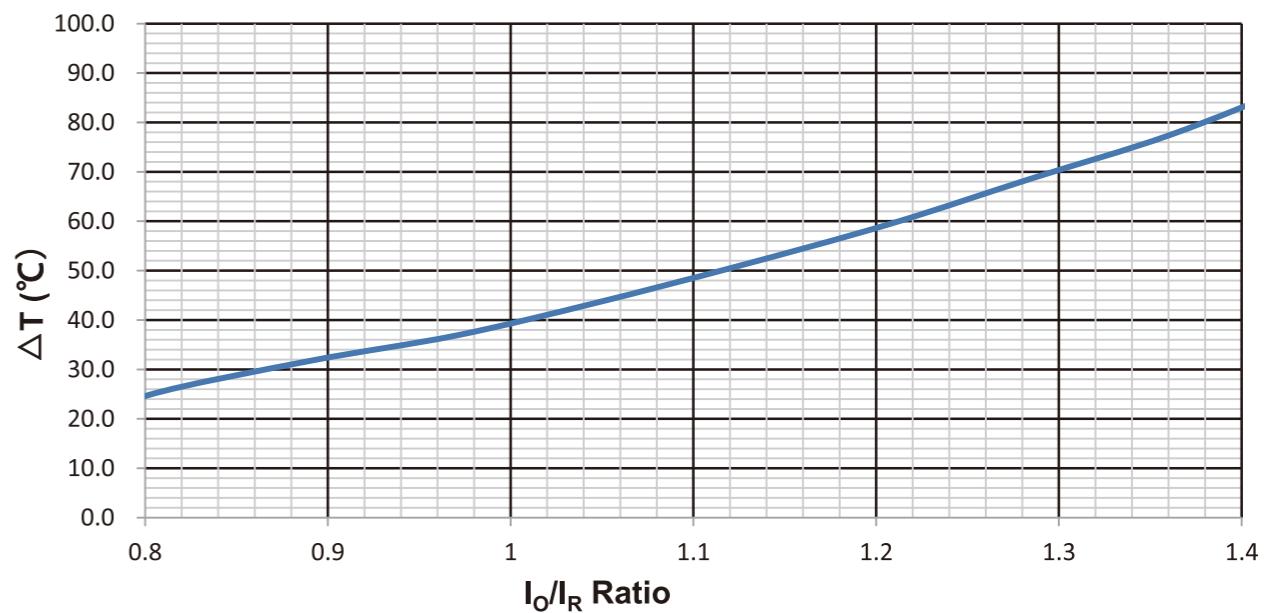

UC19 Series

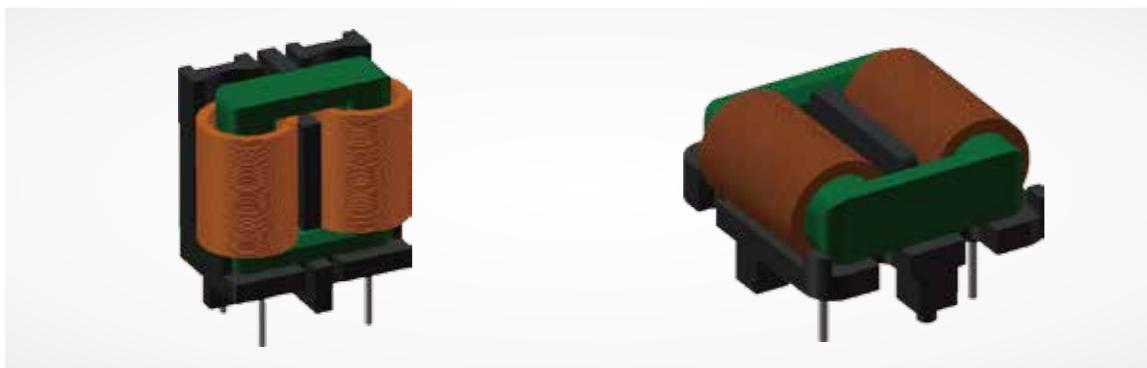

FEATURES

- Rated Voltage: 250V AC
- Operating temperature : -25°C ~ 105°C
(Temperature rise included)
- Storage temperature: -25°C ~ 105°C
- Enameled Copper Wire: Class H (180°C)
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V
- Inductance difference value of two windings must less than 2% of single winding inductance.
- Dielectric Strength: 1500VRms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V

产品特点


- 额定电压 : 250V AC
- 产品操作温度范围 : -25°C ~ 105°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 105°C
- 漆包铜线 : H级 (180°C)
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 0.25V
- 两绕组电感差值小于单绕组电感的2%。
- 介电强度 : 1500VRms , 60Sec
- 绝缘电阻 : 100MΩ Min @ 500VDC

ELECTRICAL SPECIFICATION@25±2°C 电气规格



Part Number	Inductance common Mode (mH) Min	Inductance differential Mode (uH) Typical	Resistance per winding (mΩ) Max	Rated Current Arms (Amp) temperature rise 40°C ($\Delta T=40°C$)	Replacing traditional Toroid model
XZM-UC1905mH	5.0	55.7	55	3.7	T22*14*10,FT20
XZM-UC1910mH	10.0	77.9	70	3.0	
XZM-UC1915mH	15.0	112.1	100	2.5	
XZM-UC1920mH	20.0	168	170	2.0	
XZM-UC1925mH	25.0	190	260	1.6	

MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图


Vertical version 立式

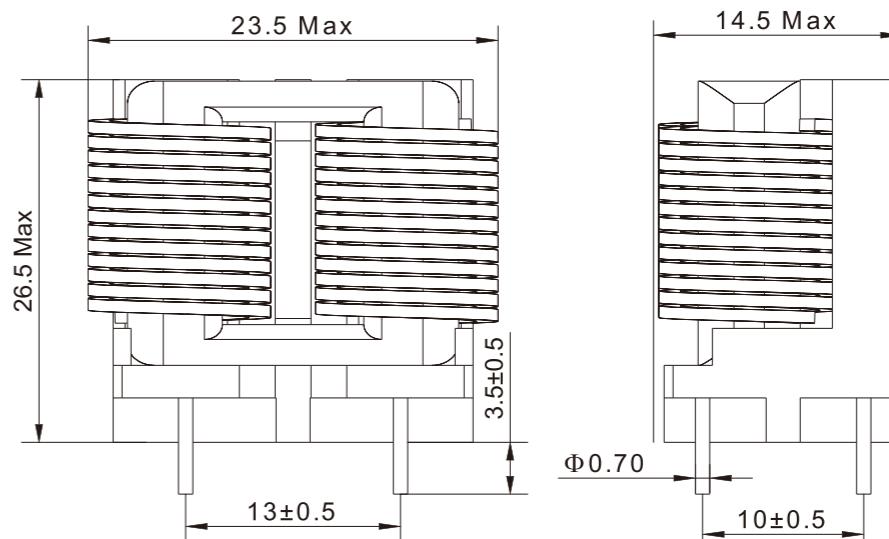


Horizontal Version 卧式

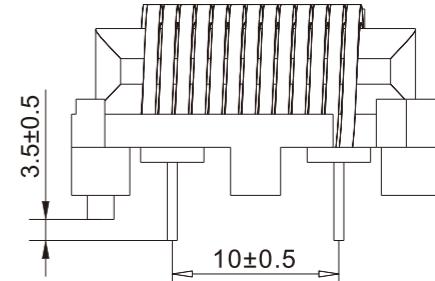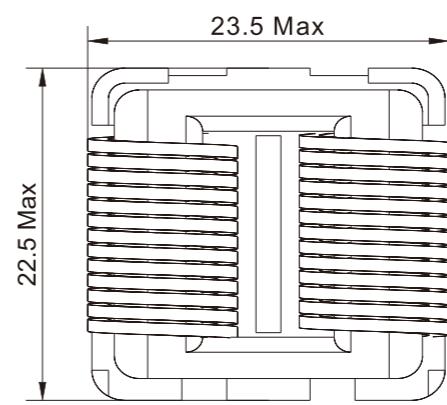

Typical Impedance Characteristics 典型阻抗特性

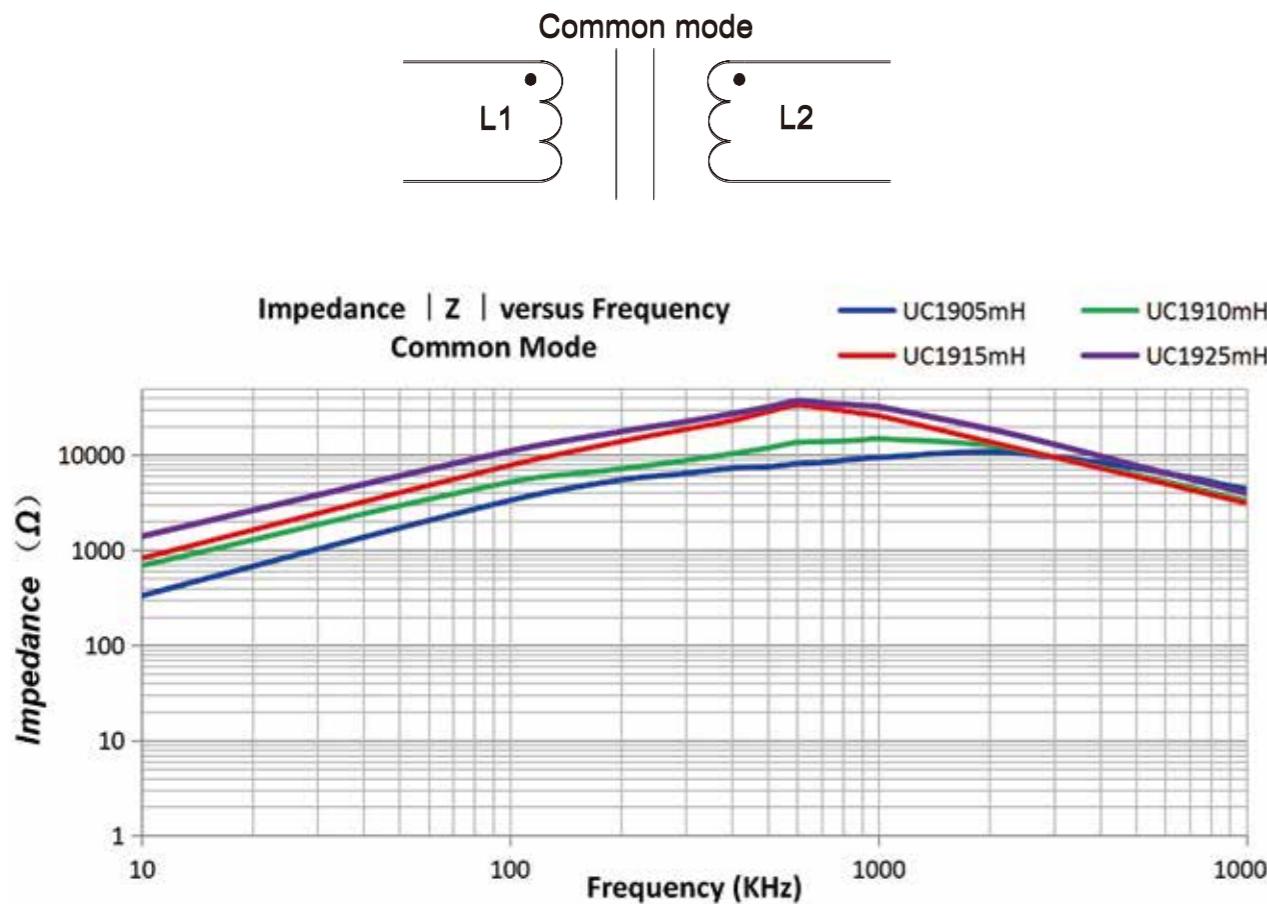

Typical Temperature Rise Characteristics 典型温升特性

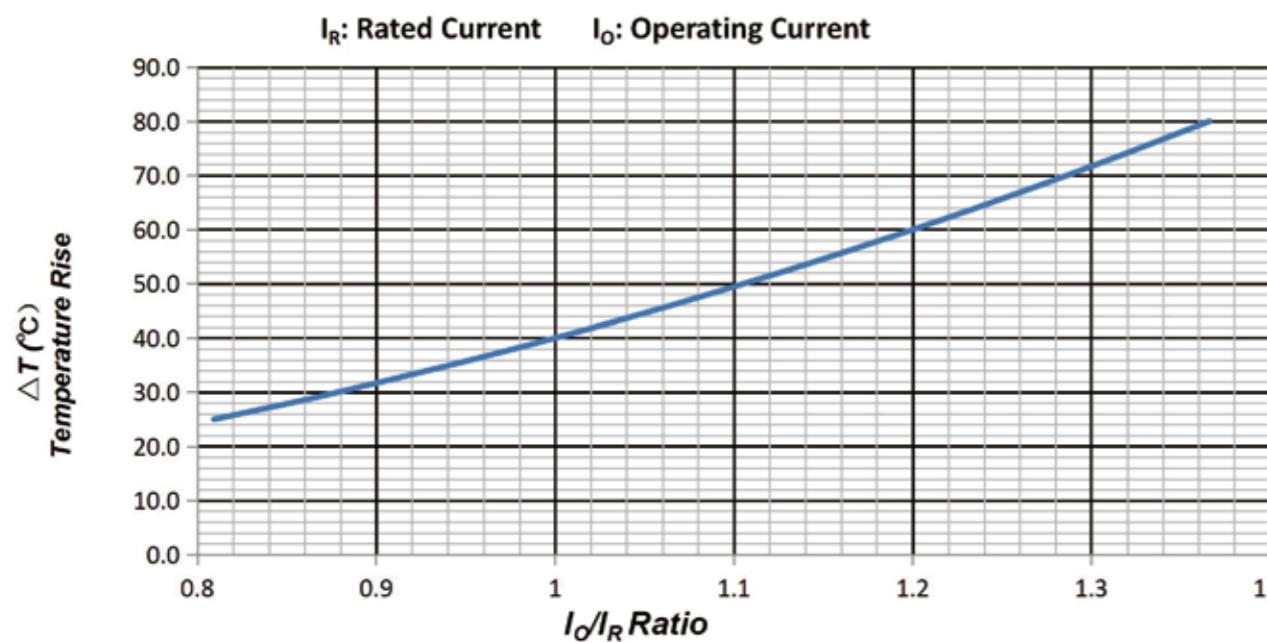

UC24 Series



FEATURES

- Rated Voltage: 250V AC
- Operating temperature : -25 °C ~ 105 °C
(Temperature rise included)
- Storage temperature: -25 °C ~ 105 °C
- Enamelled Copper Wire: Class H (180 °C)
- Uses UL94-V0 listed materials
- Measuring Frequency: 1KHz, 0.25V
- Inductance difference value of two windings must less than 2% of single winding inductance.
- Dielectric Strength: 1500Vrms, 60Sec
- Insulation Resistance: 100MΩ Min @ DC500V

产品特点


- 额定电压 : 250V AC
- 产品操作温度范围 : -25°C ~ 105°C
(包括产品温升)
- 储存温度范围 : -25°C ~ 105°C
- 漆包铜线 : H级 (180°C)
- 使用UL94-V0绝缘材料
- 测量频率 : 1KHz , 0.25V
- 两绕组电感差值小于单绕组电感的2%。
- 介电强度 : 1500Vrms , 60Sec
- 绝缘电阻 : 100MΩ Min @ 500VDC

ELECTRICAL SPECIFICATION@25±2°C 电气规格


Part Number	Inductance common Mode (mH) Min	Inductance differential Mode (uH) Typical	Resistance per winding (mΩ) Max	Rated Current Arms (Amp) temperature rise 40 C ($\Delta T=40$ C)	Replacing traditional Toroid model
XZM-UC2405mH	5.0	59	55	4.5	T25*15*10, T28*19*15 UT28
XZM-UC2410mH	10.0	106	85	3.5	
XZM-UC2420mH	20.0	188	150	2.5	

MECHANICAL SPECIFICATION (Dimensions: mm) 机械尺寸图


Vertical version 立式

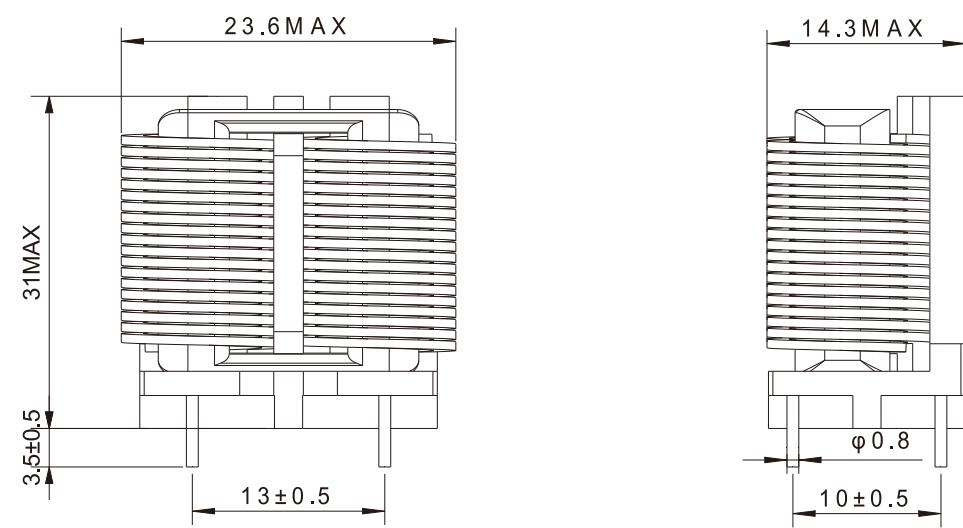


Horizontal Version 卧式

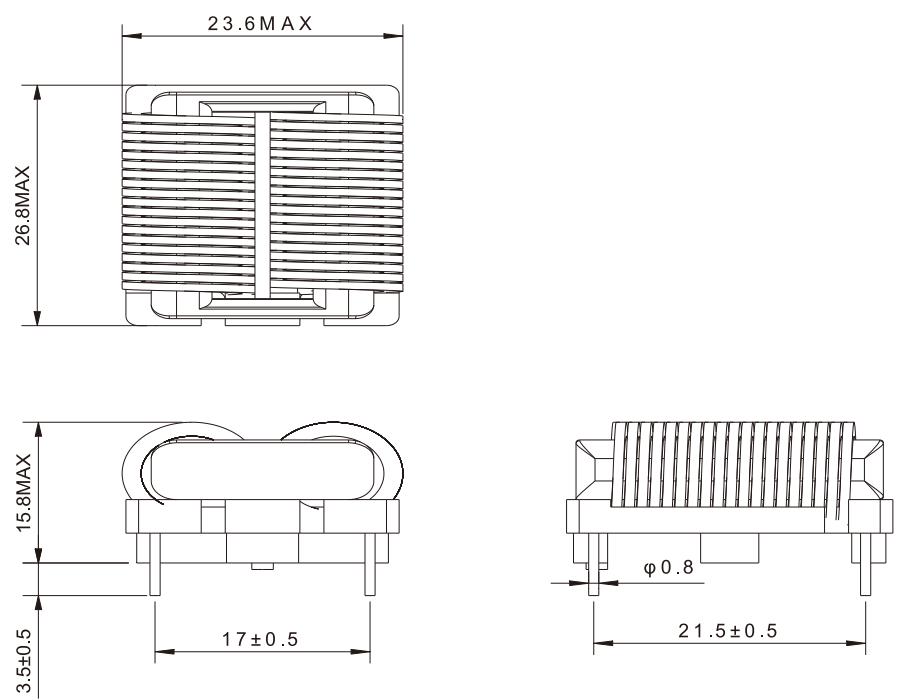

Typical Impedance Characteristics 典型阻抗特性

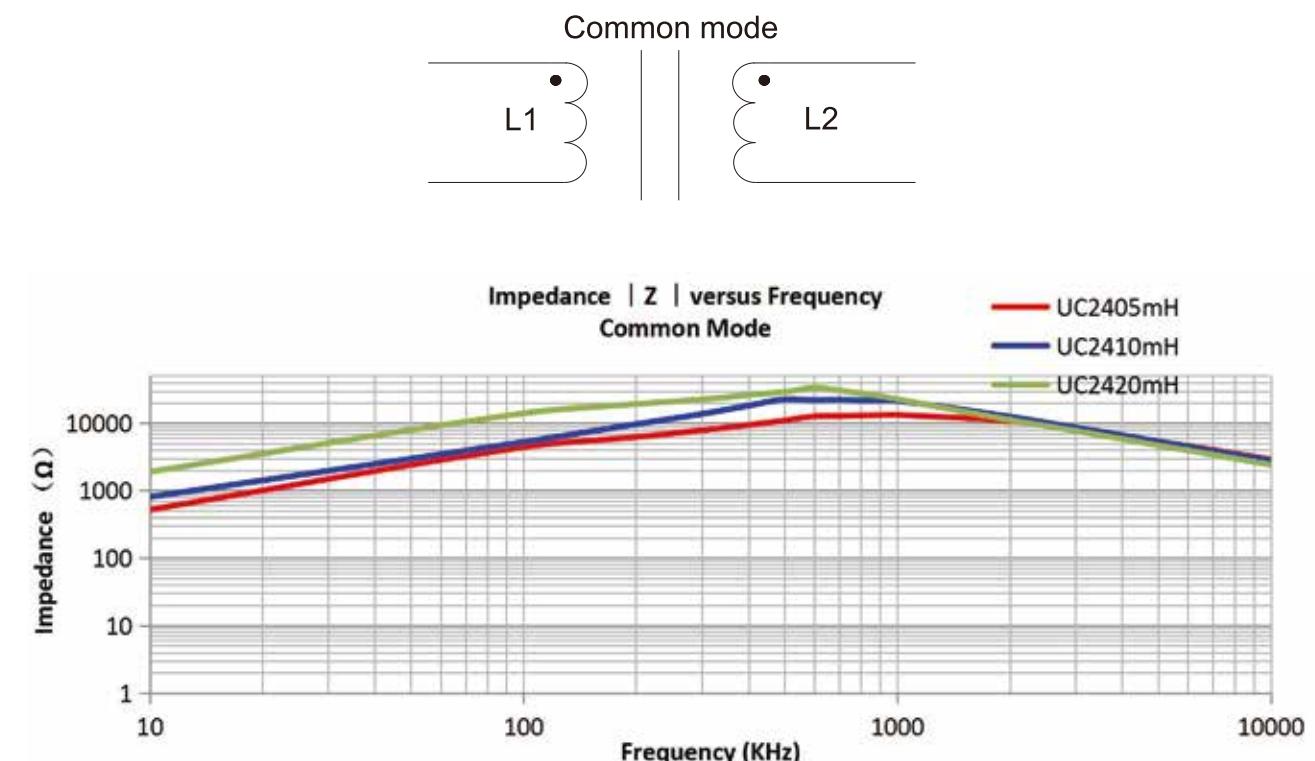

Typical Temperature Rise Characteristics 典型温升特性

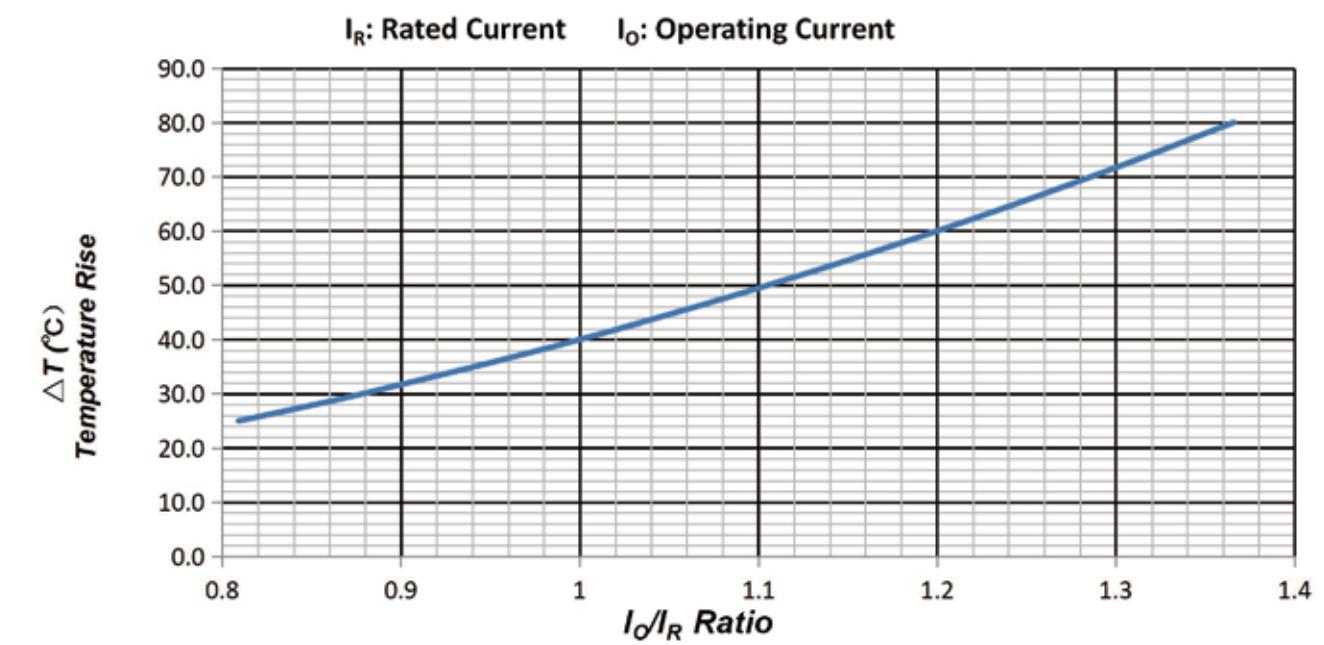

DRUM CORE CHOKES

FEATURES

- For Use as Filtering or DC/DC Power Conversion.
- Electrical Characteristics at 25°C
- Ambient Temperature up to 70°C Without Derating



产品特点

- DC/DC电源转换转换滤波器
- 电性能测试环境温度为25°C
- 环境温度70°C电参数不衰减

ELECTRICAL SPECIFICATION 电气规格

Order Number	Inductance ±15%	Rated Current	Saturation Current	Resistance max
XZM-B10100	10uH	5.0 Arms	6.5Apeak	0.016 Ω
XZM-B10101	22uH	3.5 Arms	4.2Apeak	0.031 Ω
XZM-B10102	47uH	2.4 Arms	2.9Apeak	0.07 Ω
XZM-B10103	100uH	1.5 Arms	2.0Apeak	0.15 Ω
XZM-B10104	220uH	1.1 Arms	1.35Apeak	0.30 Ω
XZM-B10105	470uH	0.7 Arms	0.95Apeak	0.70 Ω
XZM-B10106	820uH	0.55 Arms	0.7Apeak	1.15 Ω

MECHANICAL SPECIFICATION 尺寸图

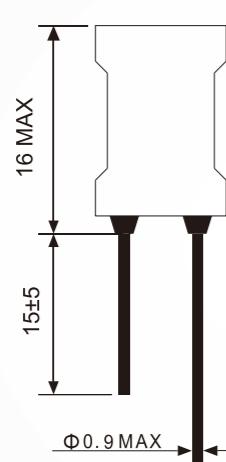

Weight≈3.5g

ACST-200 SERIES

FEATURES

- Primary Current Range 0.4 to 30 Arms
- Dielectric Strength 4000 Vrms
- Split bobbin design for 4.5 mm or 8.0 mm creepage and clearance
- Low profile(16 mm height)
- UL approved Class B
- 输入电流范围从0.4到30A
- 初次级间耐压达4000Vrms
- 隔离式骨架设计，可分别满足4.5mm及8.0mm的爬电距离
- 紧凑的结构设计（高度只有16mm）
- 使用UL认证的B级绝缘材料

产品特点




ELECTRICAL SPECIFICATION 电气规格

Primary Current Range	0.4 to 30 Arms
Frequency Range	50 to 200 Hz (sinusoidal)
Primary Resistance	
DC value	max.600 microohms
Impedance at 50 Hz	typical < 1 milliohms
Clearance	4.5 or 8.0 mm
Creepage	4.5 or 8.0 mm
Dielectric Strength	4000 Vrms (at sea level for 1 min.)
Ambient Temperature Operating	Primary Current Range 0.4 to 30A -40° C(-40° F) to 70° C(158° F) Primary Current Range 0.4 to 20A -40° C(-40° F) to 85° C(185° F)
Storage	-40° C(-40° F) to 105° C(221° F)
Vibration	0.062"(1.5mm) DA at 10-55Hz
Shock	10 g
Bobbin	Nylon 66
Terminals	Tinned copper alloy,P.P.
Max. Solder Temp.	270° C(518° F)
Max. Solder Time	5 seconds
Weight	13 grams
Packing unit in pcs	48 per plastic tray /576 per carton box


NOTES

- All values at 20 ° C(68° F)
- Additional technical information is available at www.ZETTLElectronics.com
- Specifications subject to change without notice

SCHEMATIC 原理图

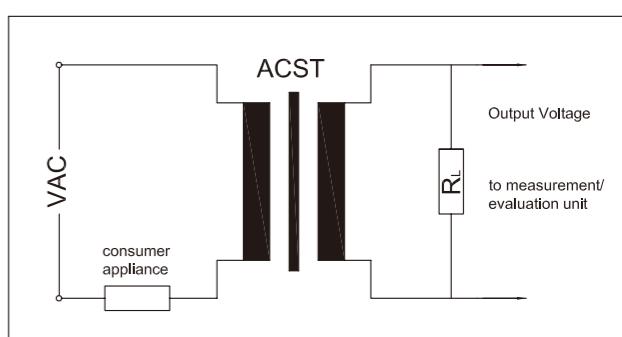

OUTPUT VOLTAGE

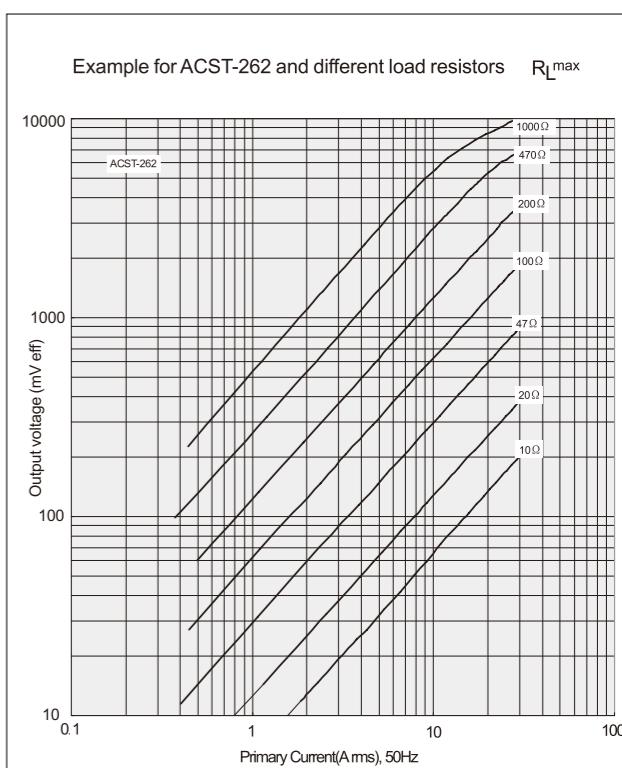






ELECTRICAL SPECIFICATION 电气规格

Order Number	Turns Ratio	R_L^{\max} (Ohms)	Output (mV/A)± 5%	Secondary Resistance (DC/Ohms)± 10%	Sense Inductance (H)± 30%
Preferred Type					
ACST-262-15	1:1500	200	123.3	220	5.2
Other Available Versions					
ACST-255-15	1:50	0.2	3.75	0.198	0.008
ACST-256-15	1:100	1	9.7	0.785	0.025
ACST-257-15	1:150	2	13.9	1.7	0.06
ACST-258-15	1:200	4.7	20.0	3.2	0.12
ACST-259-15	1:300	10	31.7	7.4	0.27
ACST-260-15	1:500	20	37.2	20	0.72
ACST-261-15	1:1000	100	91.7	79	2.4


NOTE

- "-15" indicates 4.5 mm clearance and creepage; substitute it with "-18" for 8.0 mm clearance and creepage.
- The output voltage is linear in the whole range of primary current, if the chosen load resistor is not higher than value R_L^{\max} .
- Measured at primary current of 10 Arms, 50Hz and load resistor value R_L^{\max} .
- Measured at 1 V, 100 Hz, serial.

MECHANICAL SPECIFICATION 尺寸图

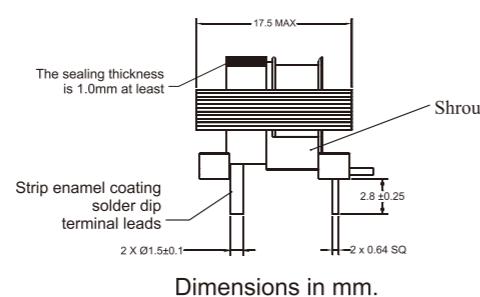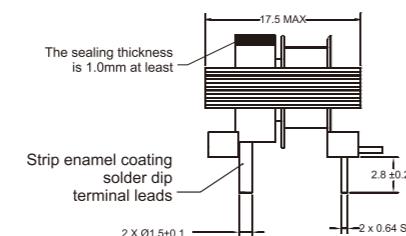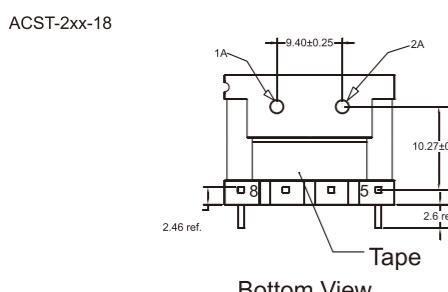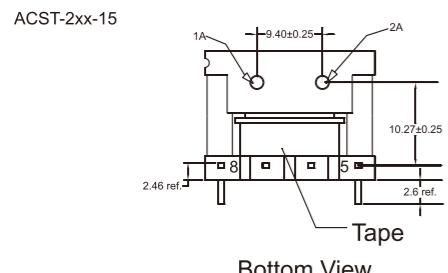

SCHEMATIC 原理图

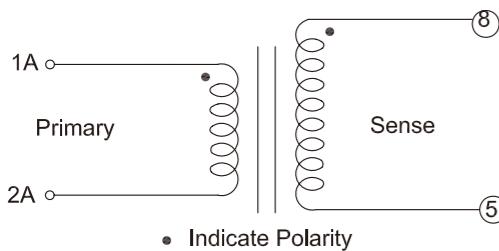

高精度电流互感器


FEATURES

- Current Range: 0.1~30Arms
- Frequency: 50~400Hz
- Accuracy Class: 0.5S
- Hi-Pot: 3000Vrms, 1min
- between primary and secondary
- Operating Temperature Range: 0°C to +60°C
- Storage temperature from -25°C to 120°C

产品特点

- 电流范围: 0.1~30Arms
- 频率: 50~400Hz
- 精度等级: 0.5S
- 耐压: P-S3000Vrms, 1 min
- 操作温度范围: 0°C to +60°C
- 贮存温度范围: -25°C to 120°C

SCHEMATIC 原理图

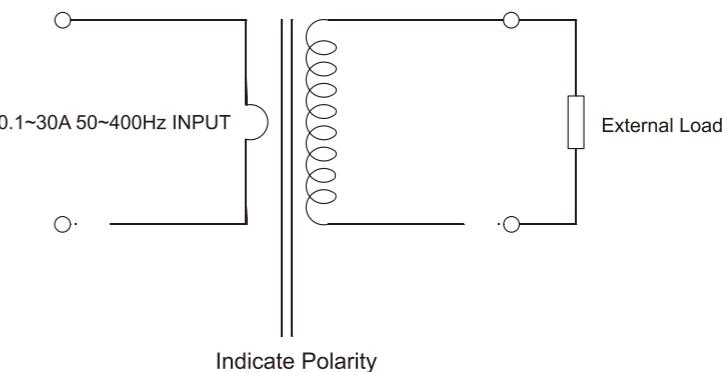


ELECTRICAL SPECIFICATION 电气规格


Order Number	Current Range	Turns Ratio	Rimax(Ohms)	Output(V/A)	Secondary Resistance (DC/Ohms)max
ZCT13050	ZCT13050-P	0.1~10 Arms	1:500	30	0.06
ZCT13100	ZCT13100-P	0.1~10 Arms	1:1000	100	0.1
ZCT13150	ZCT13150-P	0.1~10 Arms	1:1500	200	0.133
ZCT13200	ZCT13200-P	0.1~10 Arms	1:2000	250	0.125
ZCT26050		0.1~30 Arms	1:500	5	0.01
ZCT26100		0.1~30 Arms	1:1000	30	0.03
ZCT26150		0.1~30 Arms	1:1500	60	0.04
ZCT26200		0.1~30 Arms	1:2000	100	0.05
					300

MECHANICAL SPECIFICATION 尺寸图


ZCT13

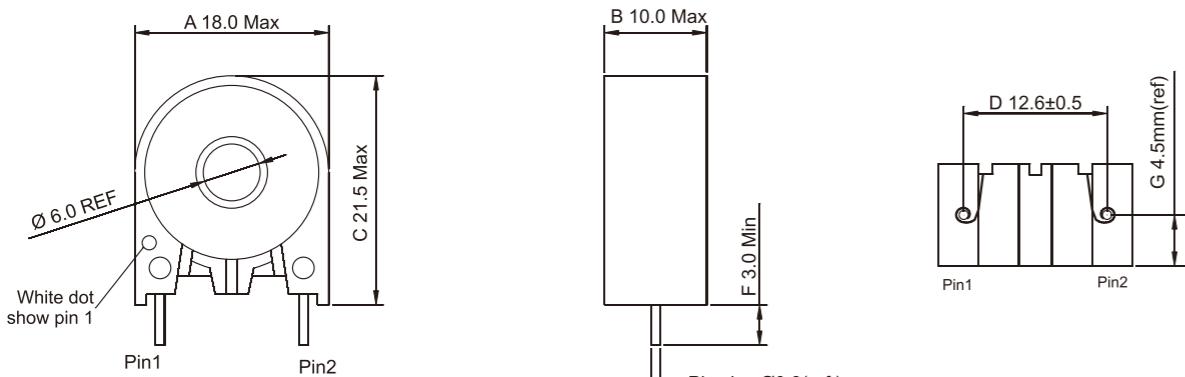

ZCT13-P

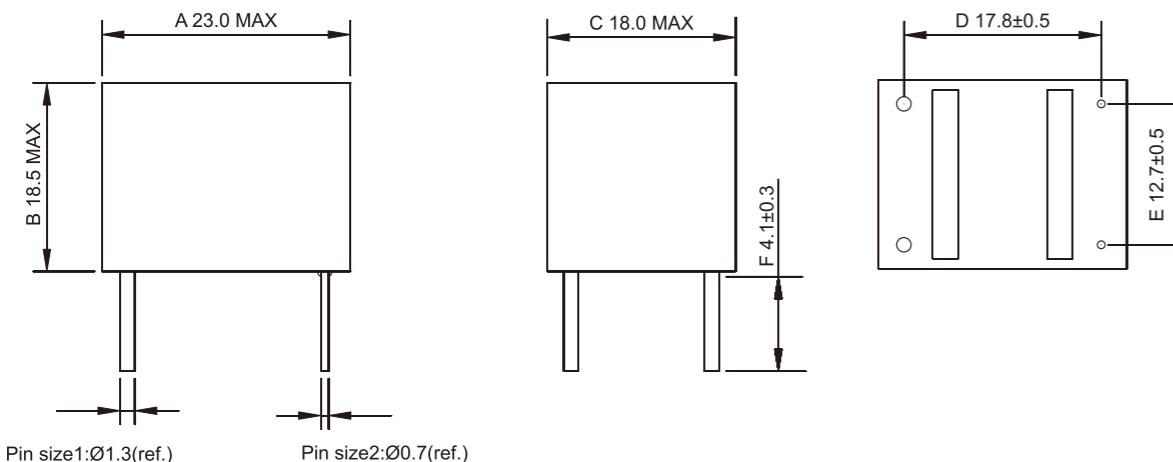

ZCT26

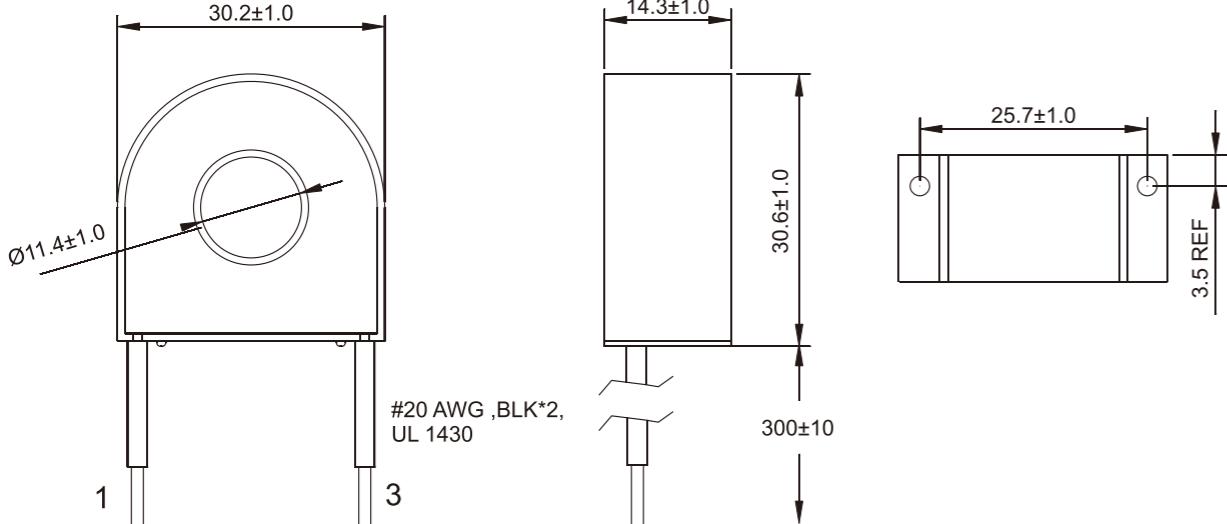

AH/ADH SERIES: EI Power PCB Transformer
[1.1VA, 2.4VA, 6.0VA, 12.0VA, 20.0VA]


FEATURES

- UL5085-1,-3 Approved:UL File No.E177998
- Class B Insulation System
- Split bobbin Design
- Dielectric Strength 2500Vrms
- Optional Single 115V or Dual 115/230V Primaries at 50/60Hz
- Standard Dual Secondaries
- 5 Standard Sizes for a Variety of Power Application


产品特点

- 通过 UL5085-1,-3认证,认证号为:E177998
- 应用CLASS B (130°C) 绝缘系统
- 隔离式骨架设计
- 初次极间耐压可达2500Vrms
- 可选择单输入115V 或者双输入115/230V 频率支持50/60Hz
- 标准双输出
- 对应不同的功率应用需求提供5种标准体积

MECHANICAL SPECIFICATION 尺寸图

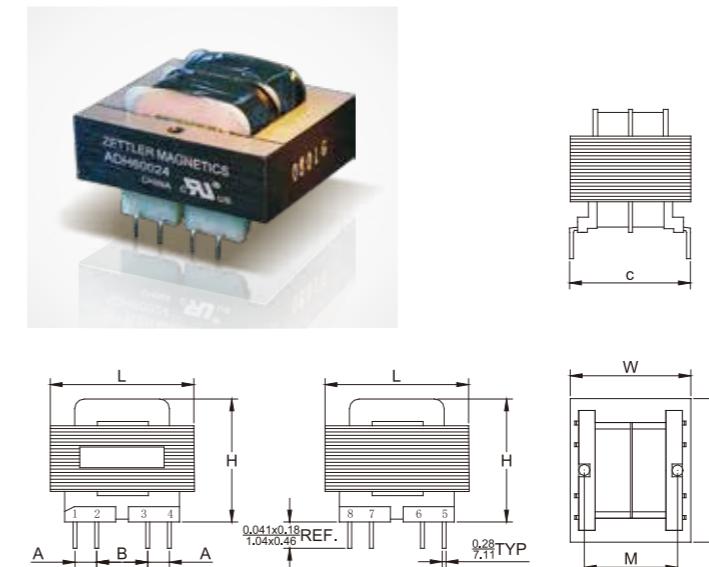

SCHEMATIC 原理图

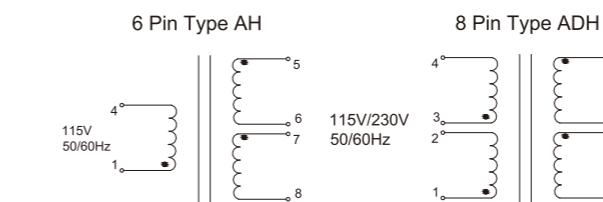

SIZE	VA	L	W	H	M	A	B	C	WT. (lbs.)
2	1.1	1.398max 35.5	1.181max 30.0	0.964max 24.5	—	0.250 6.35	0.250 6.35	1.220 30.99	0.17
3	2.4	1.398max 35.5	1.181max 30.0	1.22max 31.0	—	0.250 6.35	0.250 6.35	1.220 30.99	0.25
4	6.0	1.646max 41.8	1.339max 34.0	1.437max 36.5	1.063 27.0	0.250 6.35	0.350 8.89	1.280 32.51	0.44
5	12.0	1.909max 48.5	1.594max 40.5	1.437max 36.5	1.260 32.0	0.300 7.62	0.400 10.16	1.400 35.56	0.70
6	20.0	2.250max 57.5	1.875max 48.0	1.410max 36.5	1.496 38.00	0.300 7.62	0.400 10.16	1.590 40.39	0.80

AHI SERIES: EI Power PCB Transformer
[2.5VA, 5.0VA, 10.0VA]




FEATURES

- Conform to IEC EN61558-1 Safety Standards
- UL 5085 Approved Class 2&3: UL File No. E214561 (for 2.5VA and 10VA only)
- Dielectric Strength 4200Vrms
- Optional 115V/230V input at 50/60Hz
- Material Meet UL 94V-O Flammability Requirement
- Split Bobbin Wall Slots Eliminates all Wire Crossovers
- 3 Standard Sizes for a Variety of Power Application


产品特点

- 符合IEC EN 61558-1 安规标准
- 通过UL 5085 CLASS 2&3 认证：认证号为E214561 (仅限于2.5VA和10VA)
- 绝缘强度达到4200Vrms
- 可选择的双输入115/230V，频率支持50/60Hz
- 使用材料达到UL 94V-0的阻燃等级要求
- 分离式骨架设计
- 对应不同的功率应用需求提供3种标准体积

MECHANICAL SPECIFICATION 尺寸图

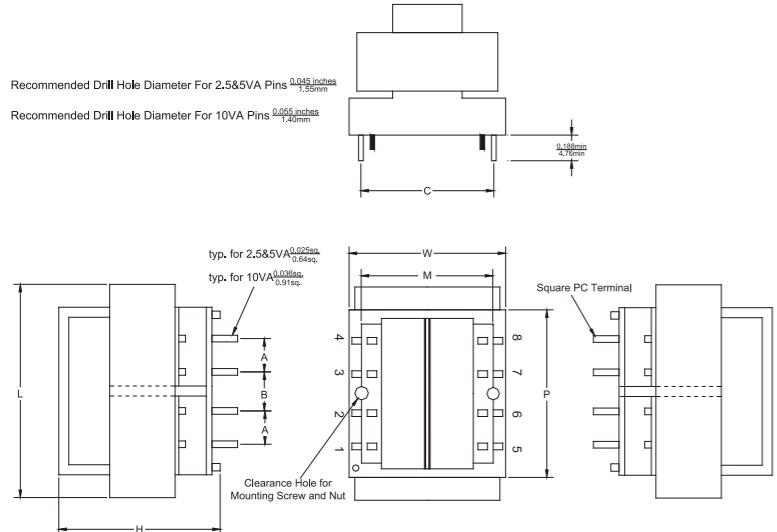

SCHEMATIC 原理图

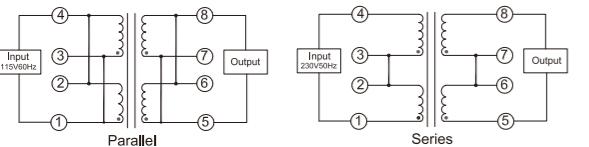

VA (SIZE)	DIMENSIONS					MTG.DIM.	WT
	L	W	H	A	B		
2.5	1.634max 41.5	1.457max 37	1.161max 29.5	0.200 5.08	0.250 6.35	1.000 25.4	1.06 26.92 0.113KG
5	1.634max 41.5	1.457max 37	1.402max 35.6	0.200 5.08	0.400 10.16	1.000 25.4	1.06 26.92 0.168KG
10	1.910max 48.5	1.614max 41	1.437max 36.5	0.200 5.08	0.400 10.16	1.140 29	1.25 31.75 0.240KG

AHF SERIES: UI Power PCB Transformer
[2.4VA, 6.0VA, 12.0VA]




FEATURES

- UL5085-1,-3 Approved:UL File No.E177998
- Dielectric Strength 2500Vrms
- Dual 115/230V Primaries
- Dual Secondaries
- Class B Insulation System
- 3 Standard Sizes for a Variety of Power Application


产品特点

- 通过UL5085-1,-3认证,认证号为:E177998
- 初次极间耐压可达2500Vrms
- 双输入115/230V，频率支持50/60Hz
- 标准双输出
- 应用CLASS B (130°C) 绝缘系统
- 对应不同的功率应用需求提供3种标准体积

MECHANICAL SPECIFICATION 尺寸图

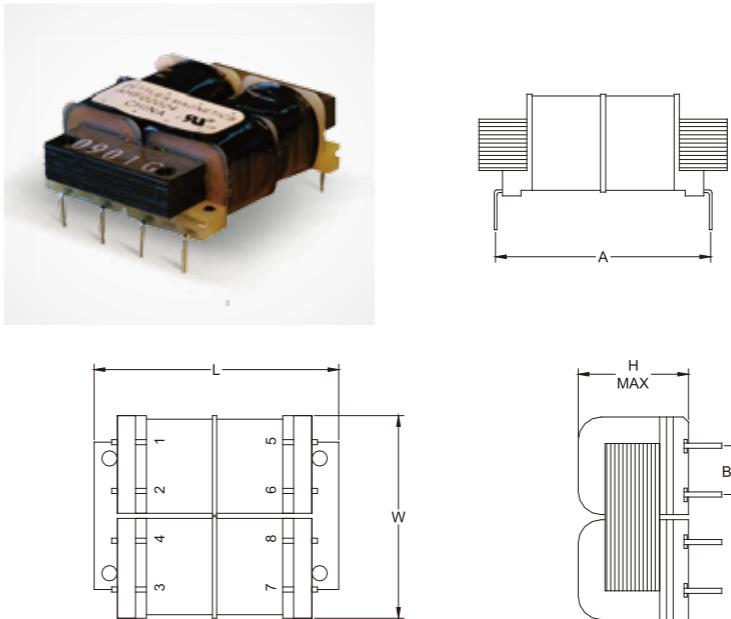

SCHEMATIC 原理图

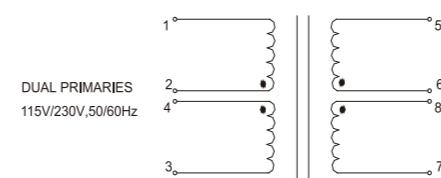

VA	L	W	H	A	B
2.4	1.925max 49.0	1.575max 40.0	0.669max 17.0	1.600 40.64	0.375 9.53
6	1.925max 49.0	1.575max 40.0	0.866max 22.0	1.600 40.64	0.375 9.53
12	2.559max 65.0	2.028max 51.5	1.102max 28.0	2.000 50.80	0.500 12.70

Order Number	VA	Rating Output	
		SER	PAR
AHF02010	2.4	10V 250mA	5V 500mA
AHF06010	6	10V 600mA	5V 1.2A
AHF12010	12	10V 1.20A	5V 2.4A
AHF02012	2.4	12.6V 200mA	6.3V 400mA
AHF06012	6	12.6V 450mA	6.3V 900mA
AHF12012	12	12.6V 900mA	6.3V 1.8A
AHF02016	2.4	16V 150mA	8V 300mA
AHF06016	6	16V 350mA	8V 700mA
AHF12016	12	16V 700mA	8V 1.4A
AHF02020	2.4	20V 125mA	10V 250mA
AHF06020	6	20V 300mA	10V 600mA
AHF12020	12	20V 600mA	10V 1.2A
AHF02024	2.4	24V 100mA	12V 200mA
AHF06024	6	24V 250mA	12V 500mA
AHF12024	12	24V 500mA	12V 1.0A
AHF02030	2.4	30V 85mA	15V 170mA
AHF06030	6	30V 200mA	15V 400mA
AHF12030	12	30V 400mA	15V 800mA
AHF02034	2.4	34V 75mA	17V 150mA
AHF06034	6	34V 170mA	17V 340mA
AHF12034	12	34V 340mA	17V 680mA
AHF02040	2.4	40V 60mA	20V 120mA
AHF06040	6	40V 150mA	20V 300mA
AHF12040	12	40V 300mA	20V 600mA
AHF02056	2.4	56V 45mA	28V 90mA
AHF06056	6	56V 100mA	28V 200mA
AHF12056	12	56V 200mA	28V 400mA
AHF02088	2.4	88V 28mA	44V 56mA
AHF06088	6	88V 65mA	44V 130mA
AHF12088	12	88V 130mA	44V 260mA
AHF02120	2.4	120V 20mA	60V 40mA
AHF06120	6	120V 50mA	60V 100mA
AHF12120	12	120V 100mA	60V 200mA
AHF02230	2.4	230V 10mA	115V 20mA
AHF06230	6	230V 25mA	115V 50mA
AHF12230	12	230V 50mA	115V 100mA

AHR SERIES: Power PCB Transformer
[30-50VA]


FEATURES

- 30VA-50VA Inherently energy limited
 - Compact frame size
 - No secondary fusing required
 - Low Heat Rise
 - Operation Frequency: 50/60 HZ
 - Input Voltages ranging 120~575V, Output-24V
 - Terminations with screw, quick-connect or wire leads
 - Panel mount, foot-mount, adapter plate, bell-housing available
 - Customizable for lead wire wire color, terminations and other preferences
 - Split bobbin design
 - Class B insulation system 130°C rated
 - UL5085 Class 2/3 Approved:UL CUL File No.E214561
- 30~50VA 固有能限设计
 - 紧凑的结构设计
 - 不需要增加额外的次级外部保险丝
 - 低温升
 - 支持工作频率50/60Hz
 - 输入电压120~575V (50VA系列最高至240V) , 输出24V
 - 电气连接采用带螺丝紧固连接, QT端子或者电子线引出方式
 - 具有多种安装可供选择
 - 可根据客户要求定制电子线的颜色, 长度, 线头端子等。
 - 隔离式骨架设计
 - 应用CLASS B (130°C) 绝缘系统
 - 通过 UL5085 Class 2/3认证,UL/CUL认证号为:E214561



产品特点

ORDERING CODE 命名规则

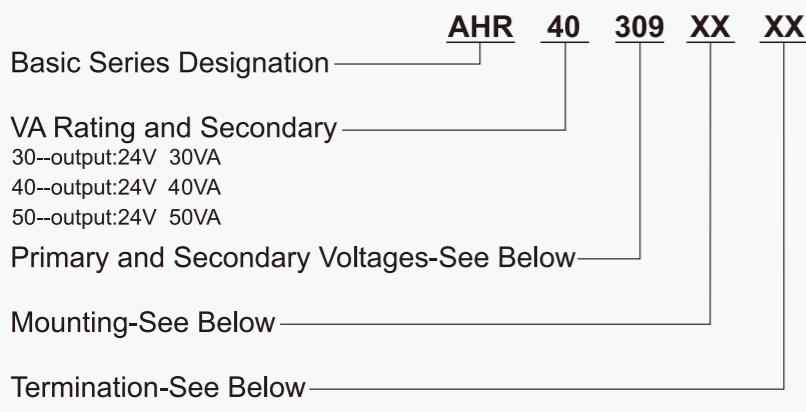

MOUNTING 组装方式

Designator	Mounting Type
FM	Foot Mount, Bracket
MM	Multi Mount Adapter Plate
PM	Panel Mount, Lam Holes
FC	Screw Term

TERMINATION


Designator	Terminal Type
NIL	No QD or Wire
QT	Top Quick Disconnect
Q1	One Side QD
Q2	Both Side QD
W	Wire Leads
QW	QD and Wire Leads

ELECTRICAL SPECIFICATION 电气规格


30VA Standard Model	40VA Standard Model	50VA Standard Model	Input Voltage	Frequency	Output Voltage	Mounting		Termination			
						FM	PM	MM	FC	W	QW
AHR30309	AHR40309	AHR50309	120	60Hz	24V	●	●	●	●	●	●
AHR30310	AHR40310	AHR50310	208/240	50/60Hz	24V	●	●	●	●	●	●
AHR30311	AHR40311	AHR50311	120	50/60Hz	24V	●	●	●	●	●	●
AHR30312	AHR40312	AHR50312	240	50/60Hz	24V	●	●	●	●	●	●
AHR30313	AHR40313	N/A	277	50/60Hz	24V	●	●	●	●	●	●
AHR30314	AHR40314	N/A	480	50/60Hz	24V	●	●	●	●	●	●
AHR30315	AHR40315	N/A	380/415	50/60Hz	24V						
AHR30316	AHR40316	N/A	575	50/60Hz	24V	●	●	●	●	●	●
AHR30317	AHR40317	AHR50317	120/240	50/60Hz	24V	●	●	●	●	●	●
AHR30318	AHR40318	N/A	120/208/240	50/60Hz	24V	●	●	●	●		
		AHR50318	120/208/240	50/60Hz	24V	●					

MECHANICAL SPECIFICATION [30 & 40VA] 尺寸图


TYPE FMW FOOT MOUNT BRACKET WITH WIRE LEADS

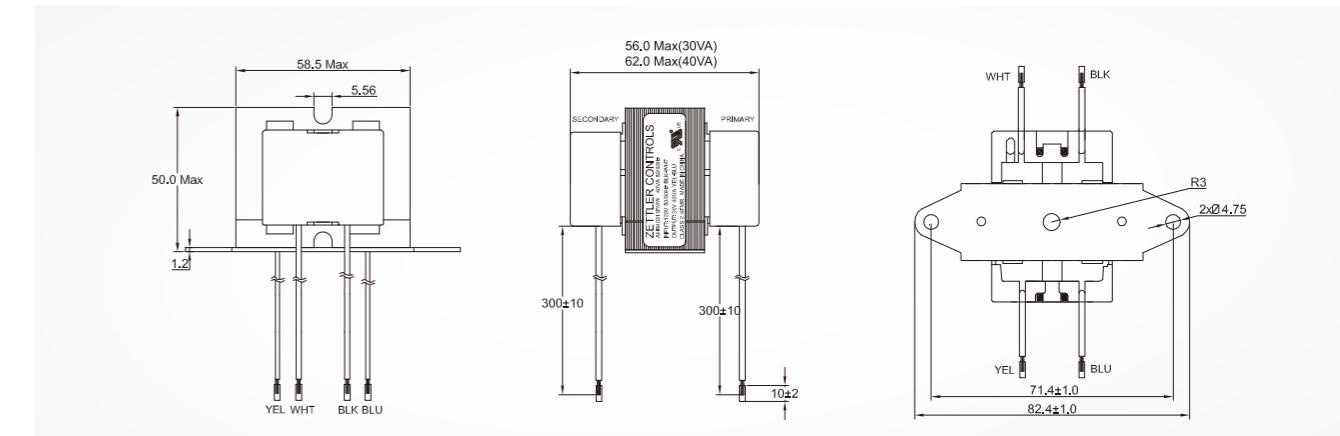

TYPE PM PANEL MOUNT

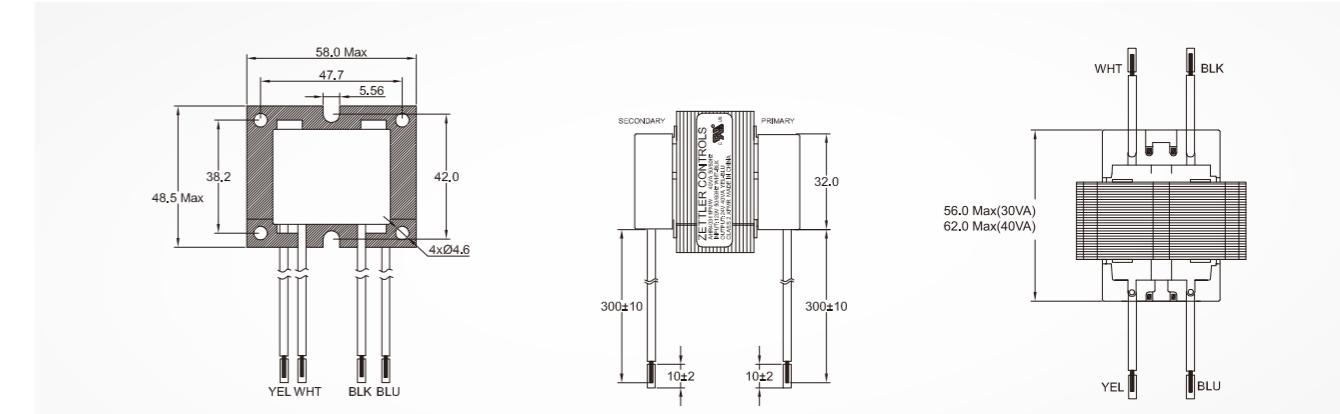


TYPE FC SCREW TERMINATION

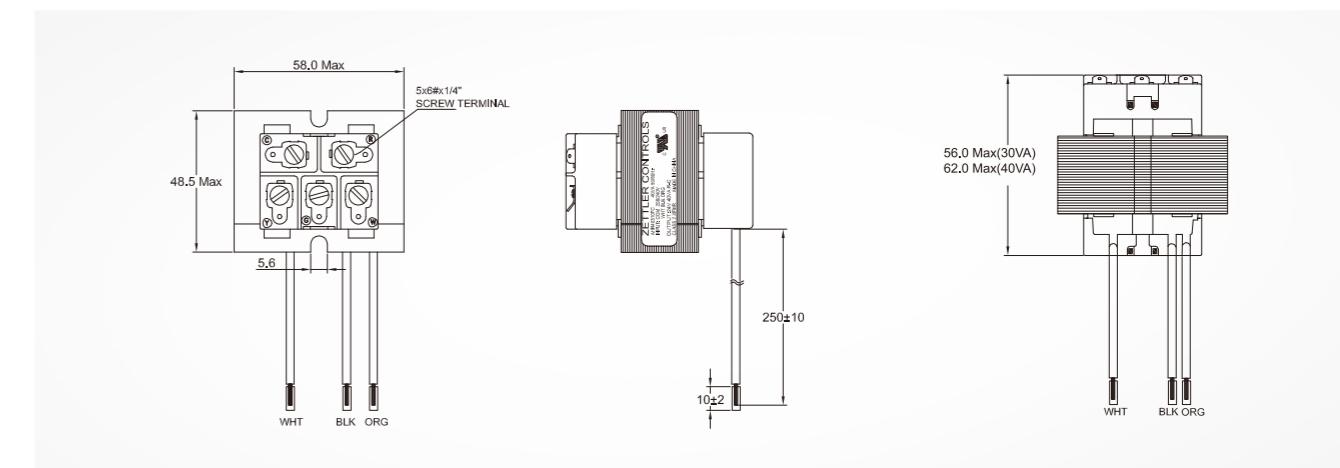


MECHANICAL SPECIFICATION [50VA] 尺寸图


TYPE FMQ1 FOOT MOUNT WITH QD TERMINALS ON ONE SIDE

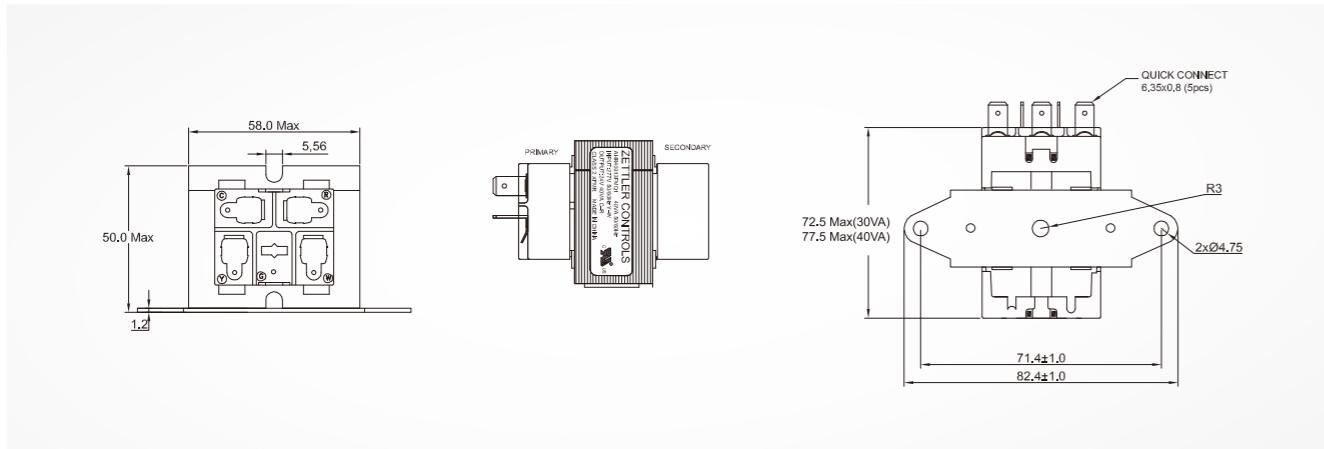


TYPE FMQ2 FOOT MOUNT WITH QD TERMINALS ON BOTH SIDES

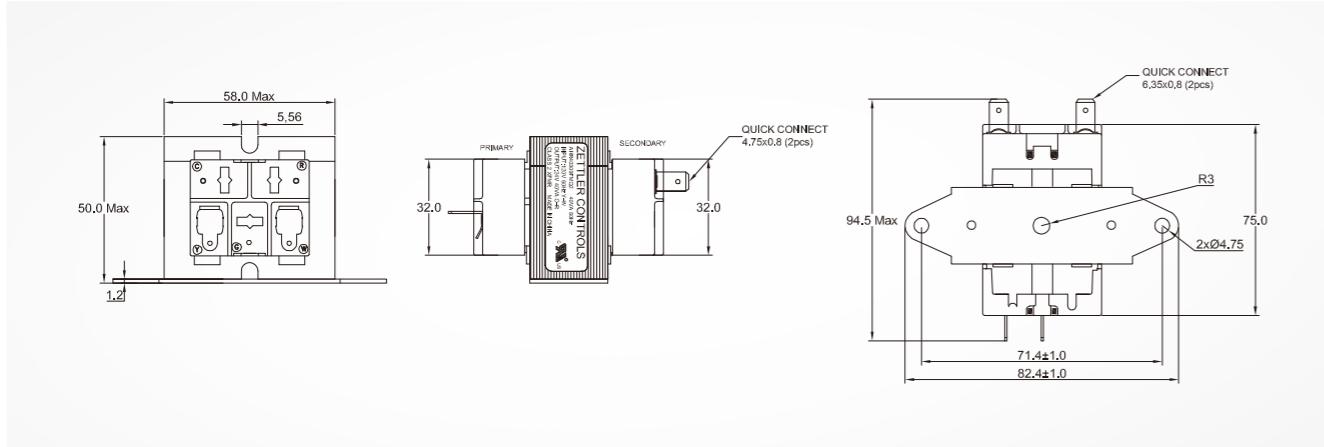


TYPE FMQT FOOT MOUNT WITH TOP MOUNTED QD TERMINALS

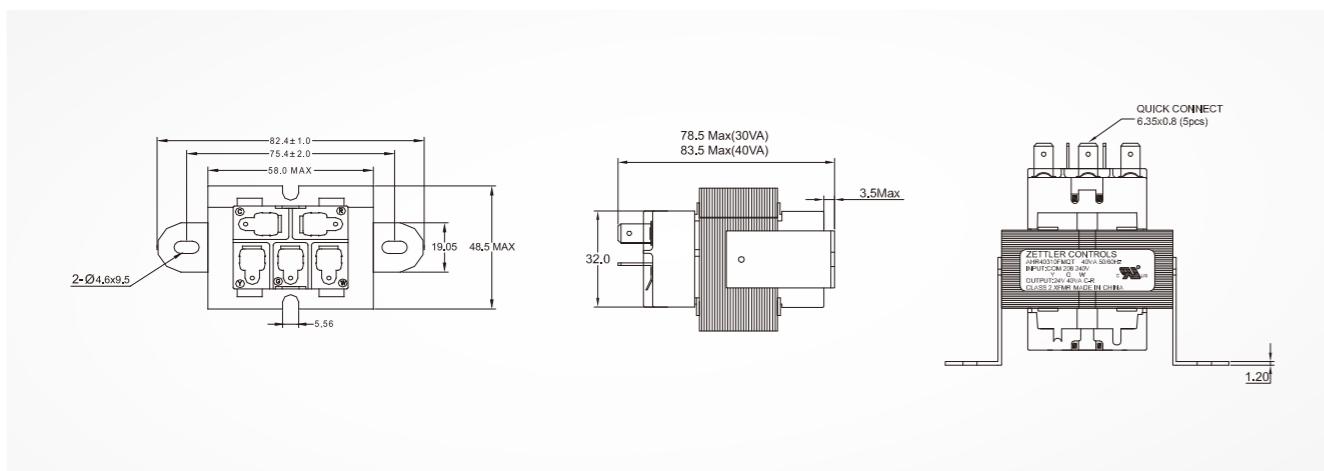


TYPE FMW FOOT MOUNT BRACKET WITH WIRE LEADS

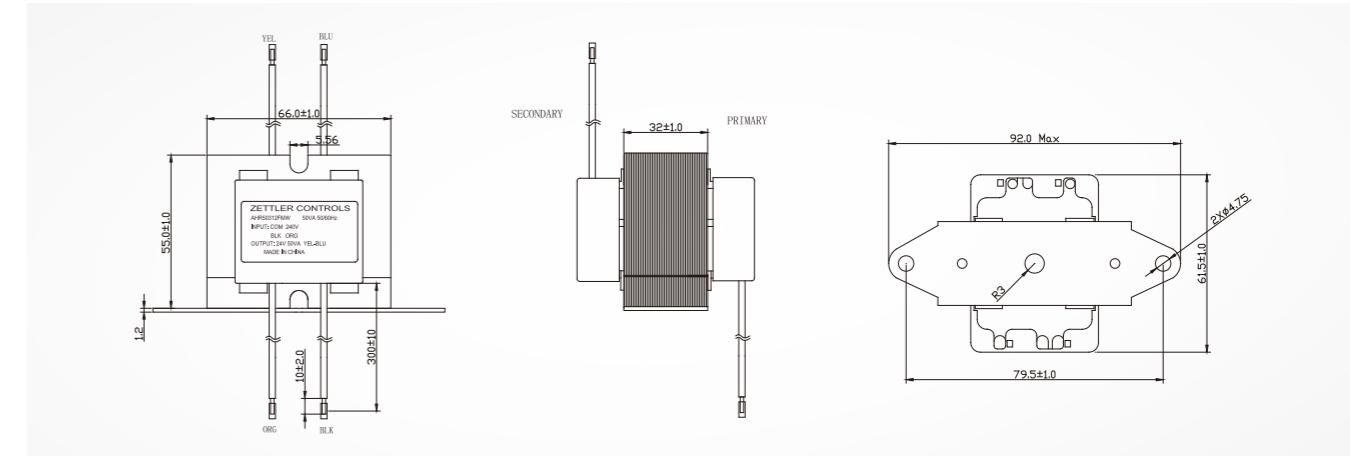

TYPE FMQW FOOT MOUNT BRACKETS WITH QD TERMINALS AND WIRE LEADS

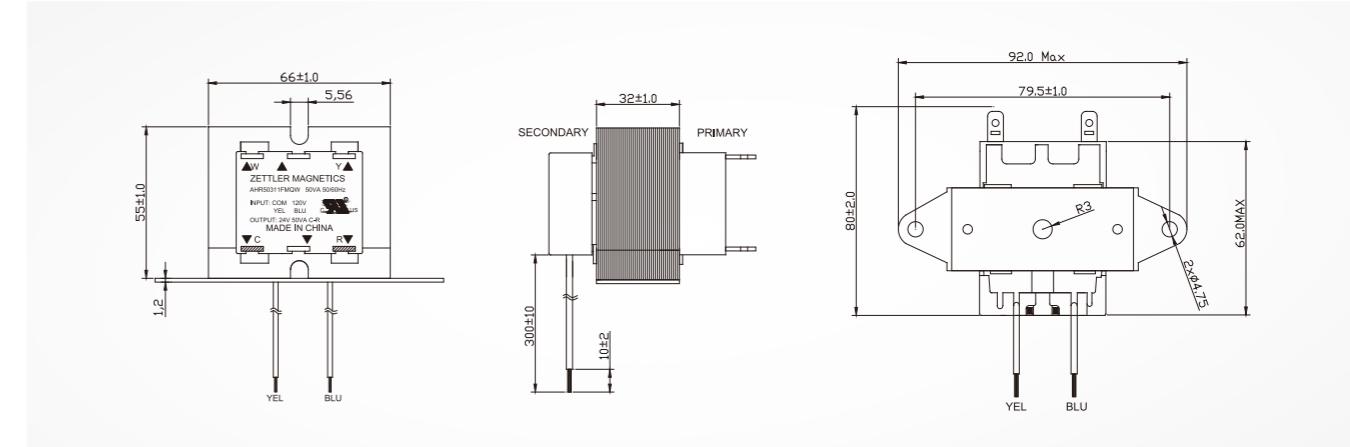


TYPE FMQT FOOT MOUNT BRACKETS WITH TOP MOUNTED QD TERMINALS

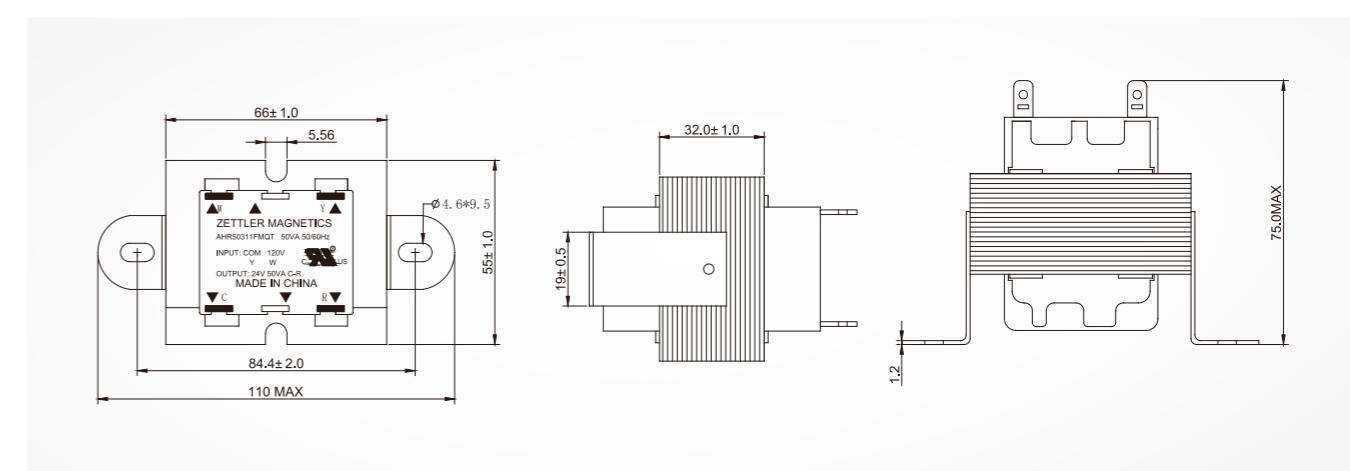


TOROIDAL TRANSFORMERS


TYPE FMQT PANEL MOUNT WITH QD TERMINALS

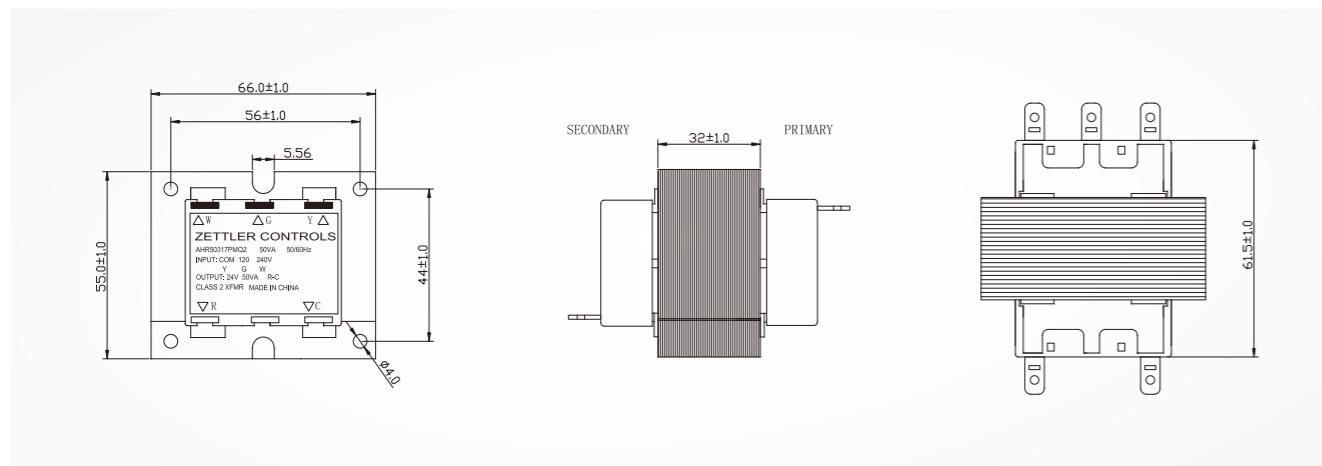

TYPE FMQ1 FOOT MOUNT ONE SIDE QD TERMINALS

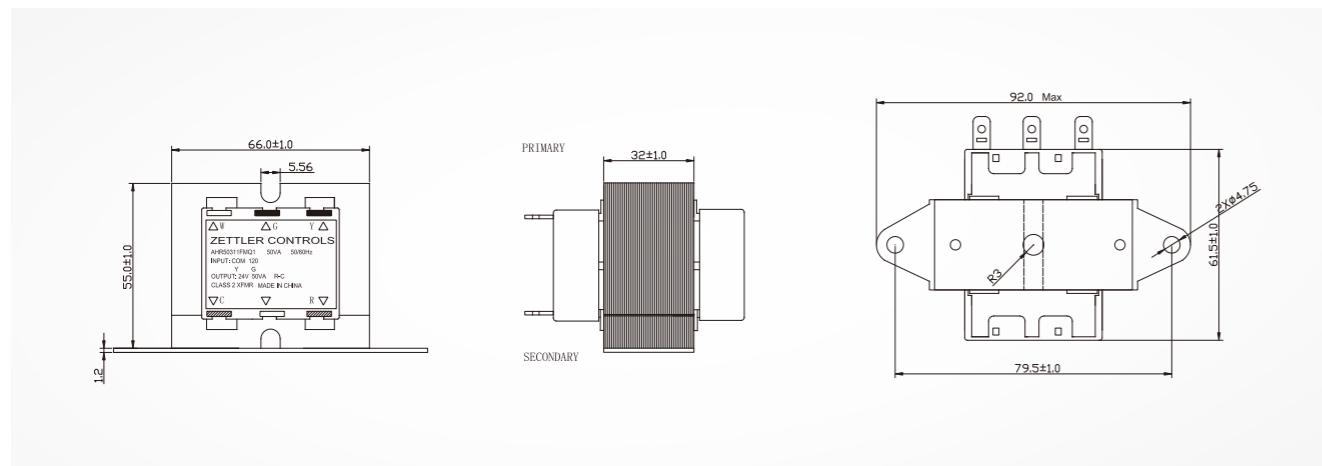

TYPE FMQ2 FOOT MOUNT BOTH SIDES QD TERMINALS

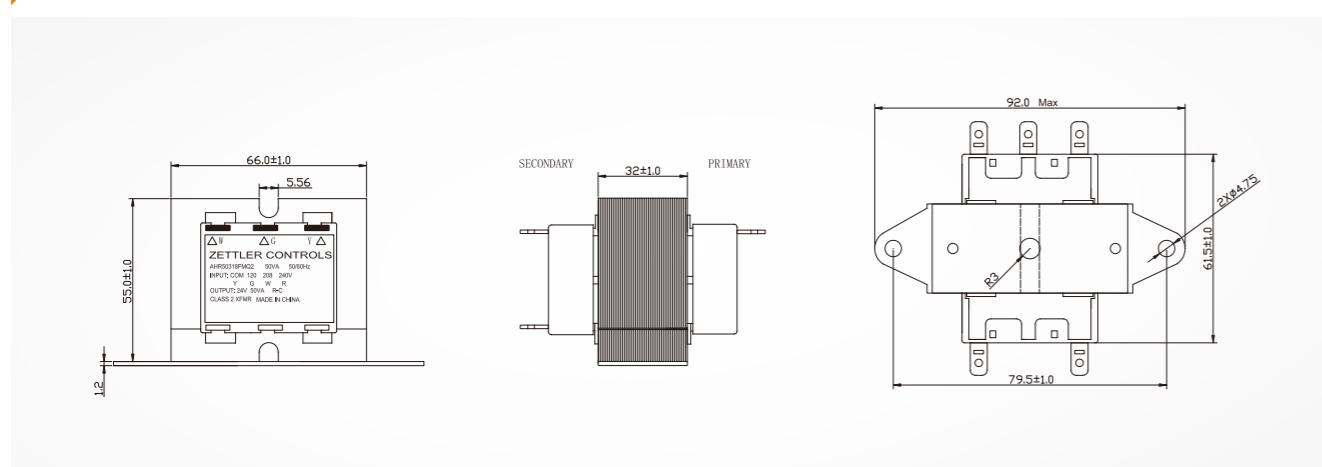


FEATURES

- Low Magnetic Noise
- High Efficiency
- Excellent Load Regulation
- Easy Assembly
- Very Low No-load Losses and magnetizing Current
- Half Size and Weight Comparing to EI Transformer
- Various Input Options
100V/110v/117V/120V/220V/230V/240V, 50/60HZ
- Dielectric Strength 3KV, 1min
- 100% Electric Parameters Test
- Power Range 20VA to 5000VA Available According to Customer's Requirement
- Class B Insulation System
- Optional Single or Dual Primary


产品特点

- 低漏磁，低噪音
- 高效率
- 良好的负载调节性能
- 易于配装
- 低损耗、低励磁电流
- 体积小、重量轻
- 多种输入电压选择100v/110v/117v/120v/220v/230v /240v/, 50/60HZ
- 初次与次级绝缘强度超过3KV/1分钟
- 产品电气性能100%全检
- 功率应用范围在20VA至5000VA间或根据客户要求订制
- 所有材料符合CLASS B级绝缘
- 初级单输入与双输入可选择


MECHANICAL SPECIFICATION 尺寸图

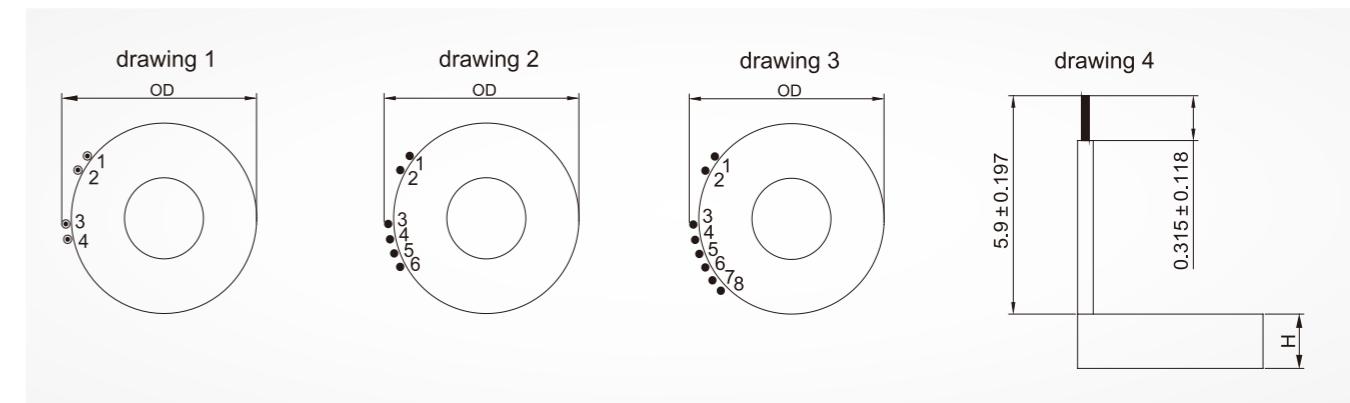

SCHEMATIC 原理图

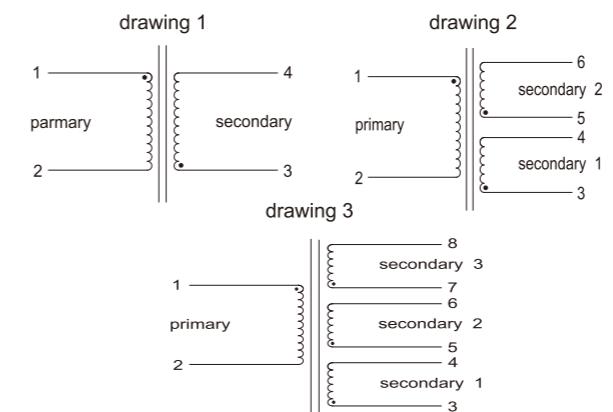

CONSTRUCTION

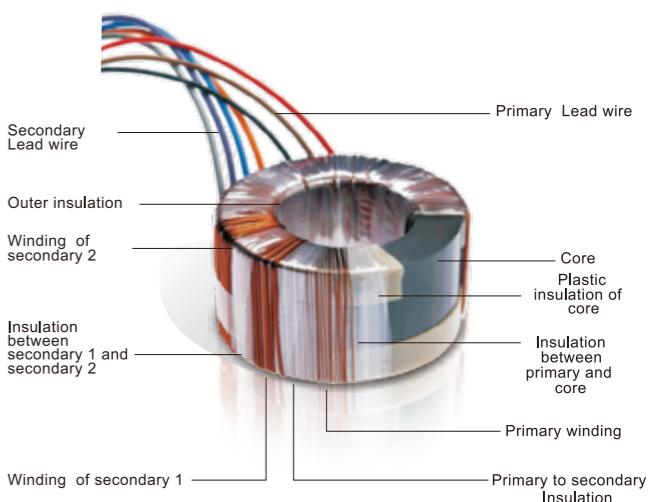

ELECTRIACL SPECIFICATION 电气规格

Item	Power	AC Output		Dimension				Weight		
		Voltage range	Current range	OD		H				
		VA	V	A	In	mm	In	mm	lbs	Kg
1	20	12 ~ 24	0.84 ~ 1.67	2.5	63	1.3	33	0.73	0.33	
2	25	12 ~ 24	1.04 ~ 2.08	2.6	65	1.4	35	0.84	0.38	
3	30	12 ~ 24	1.25 ~ 2.50	2.8	70	1.6	40	0.99	0.45	
4	35	12 ~ 24	1.46 ~ 2.92	2.8	72	1.6	40	1.08	0.49	
5	40	12 ~ 24	0.84 ~ 1.67	3.0	75	1.6	40	1.17	0.53	
6	45	12 ~ 24	1.67 ~ 3.75	3.0	75	1.6	40	1.26	0.57	
7	50	12 ~ 36	1.67 ~ 3.75	3.1	80	1.6	40	1.50	0.68	
8	60	12 ~ 36	1.67 ~ 5.00	3.3	83	1.7	43	1.61	0.73	
9	70	12 ~ 36	1.95 ~ 5.84	3.3	85	1.7	43	1.83	0.83	
10	80	12 ~ 36	2.22 ~ 6.67	3.5	90	1.7	43	2.16	0.98	
11	90	12 ~ 36	2.50 ~ 7.50	3.7	95	1.7	43	2.31	1.05	
12	100	12 ~ 36	2.78 ~ 8.34	3.9	100	1.7	48	2.65	1.20	
13	150	12 ~ 24 * 2	3.13 ~ 6.25	4.1	105	1.9	50	3.31	1.50	
14	200	12 ~ 24 * 2	4.17 ~ 8.33	4.3	110	2.0	53	3.97	1.80	
15	250	12 ~ 24 * 2	5.21 ~ 10.42	4.7	120	2.1	55	4.85	2.20	
16	300	12 ~ 24 * 2	6.25 ~ 12.50	4.7	120	2.2	58	5.29	2.40	
17	350	12 ~ 24 * 2	7.29 ~ 14.58	4.8	123	2.3	60	5.84	2.65	
18	400	12 ~ 24 * 2	8.33 ~ 16.67	4.9	125	2.4	63	6.39	2.90	
19	450	24 ~ 48 * 2	4.69 ~ 9.38	5.0	128	2.5	65	6.61	3.00	
20	500	24 ~ 48 * 2	5.21 ~ 10.42	5.1	130	2.6	65	7.05	3.20	
21	600	24 ~ 48 * 2	6.25 ~ 12.50	5.2	132	2.6	65	8.42	3.82	
22	700	24 ~ 48 * 2	7.29 ~ 14.58	5.7	145	2.6	70	9.48	4.30	
23	800	24 ~ 48 * 2	8.33 ~ 16.67	5.7	145	2.8	73	10.05	4.56	
24	900	24 ~ 48 * 2	9.38 ~ 18.75	5.9	150	2.9		10.87	4.93	
25	1000	18 ~ 36 * 2	6.95 ~ 13.89		6.3	160	3.0	75	12.13	5.50
26	1500	18 ~ 36 * 2	10.42 ~ 20.83		6.7	170	3.1	80	15.54	7.05
27	2000	18 ~ 36 * 2	13.89 ~ 27.78		7.1	180	3.3	85	19.18	8.70
28	3000	12 ~ 24 * 2	10.42 ~ 20.83		7.7	195	3.5	90	25.57	11.60
29	4000	24 ~ 48 * 2	15.63 ~ 31.25		8.1	205	3.7	95	31.53	14.30
30	5000	12 ~ 24 * 2	10.42 ~ 20.83		8.5	215	3.9	100	37.04	16.80
		40 ~ 80 * 2	12.50 ~ 25.00							
		40 ~ 80 * 2	18.75 ~ 37.50							

