

	Part name	Alnico Magnetic Speaker(Plastic)	Date	2026-09-08
	Part number	S-15-8R0.5W-CZW01	Edition	V2.0
	Department		Page	1 / 5

1.TEST CONDITION（测试条件）

Unless otherwise specified,The standard of range atmospheric conditions for making measurements and tests as follows（无特定要求时如下述测试条件）：17°C~25°C，45%~85%RH，860HPA~1060HPA.

If there is no doubt about results,measurement shall be made with in the following limits.



（当判断有疑问的场合如下述测试条件）：20°C±3°C，60%~70%RH，860HPA~1060HPA.

2. SPECIFICATION OF SPEAKER MODE（喇叭模式规格）

2.1	Rated IMPEDANCE 额定阻抗	8Ω±15%	At 1KHz
2.2	RESONANCE FREQUENCY 最低共振周波数	950 ±20%Hz	At 0.89V
2.3	Rated Power 额定功率	0.5W	At 2.0V
2.4	MAX POWER 最大功率	0.8W	At 2.52V
2.5	Outerput S.P.L 出力音压	78±3dB at 0.1W/0.1M	At 1.2.1.5.2.0KHz average
2.6	Frequency response curve 实效频宽	F0 ~ 10KHz	Deviation -10db from average S.P.L
2.7	Rub& Buzz 异常音检查	should not be audible buzz and rattle (无异常声音)	Sine WAVE(正弦波入力) at 2.0V/700~10KHz
2.8	Dostortion 失真	≤5%THD	At 1kHz 0.1M/0.1W
2.9	Polarity 极性	When a positive D.C current is applied to the voice coil terminal marked +,the diaphragm shall move forward.(端子板的正极通入电流，振膜向前运动)	
2.1	Magnet Size 磁铁	NdFeB	
2.11	Net Weight 重量		


	Part name	Alnico Magnetic Speaker(Plastic)	Date	2026-09-08
	Part number	S-15-8R0.5W-CZW01	Edition	V2.0
	Department		Page	2 / 5

3.ENVIRONMENTAL CHARACTERISTICS（信赖性试验）

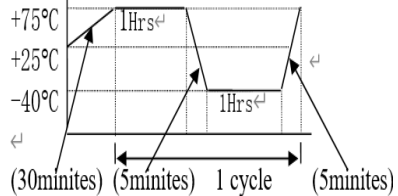
3.1	High temperature test 耐热试验	+ 75±3°C duration 96 hours ,then removal back to normal temperature for 2 hours（+75±3°C，96小时实验后，常温放置2小时）	
3.2	LOW temperature test 低温实验	- 40±3°C duration 96 hours ,then removal back to normal temperature for 2 hours（-40±3°C，96小时实验后，常温放置2小时）	
3.3	Humidity test 耐湿试验	Temperature +40±3°C， relative humidity 90~95%, duration ,96 hours ,then removal back to normal temperature for 2 hours（温度+40±3°C，相对湿度90~95%，96小时实验后，常温放置2小时）	
3.4	Load test 连续负荷试验	The products shall not be no sound/Buzz&Rattle/different volume/exceptional diversification of frequency response curve in testing and after testing process for a continuous working of 72 H at a rated 0.5W white noise 。 0.5W的白噪声下连续工作72小时,测试中和试验后不能出现任何无声/杂音/音量大小不均/频率响应曲线等异常变化。	
3.5	Temperature cycle test 温度周期试验	Temperature: -40°C to +75±3°C Duration : 1 hours Cycl :2cycle 温度-40°C 1小时转高温， +75 °C±3°C 1小时为一周期共试验2周期	
3.6	Drop test 跌落试验	The speaker shall be dorp 5 times as shown in the figure and Cacophony must be normal（如图所示5次跌落实验后外观和声音无异常）	
3.7	In Sulation resistance 绝缘阻抗	A VOLTAGE OF 100V.d.c shall be applited for 1 min between a terminal and a frame ,after which measurement shall be made ,2MΩ OR MORE（D. C. 100V，1分钟后端子与支架间2MΩ以上）	
3.8	Vibration test ibration 振动试验（捆包状态）	10-55Hz/min Amplitude: 1.5mm Duration: 2hours each axes	
3.9	Operating temperature 工作温度	- 40°C TO+75°C	
3.10	torage temperature 储存温度	- 40°C TO+80°C	

Part name	Alnico Magnetic Speaker(Plastic)	Date	2026-09-08
Part number	S-15-8R0.5W-CZW01	Edition	V2.0
Department		Page	3 / 5

4.MEASURING CIRCUIT (SPEAKER) 测试回路（喇叭模式）

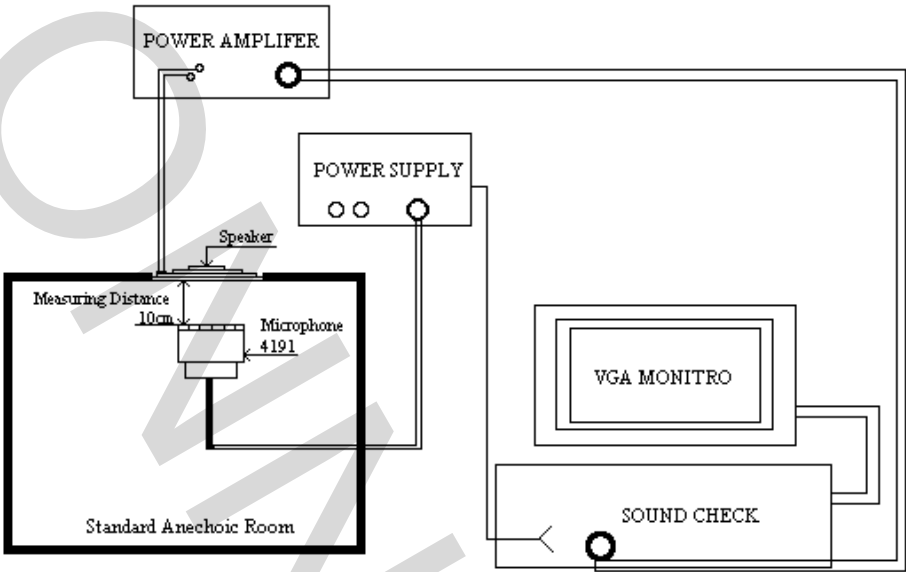


5.FREQUENCY CURVE (频响曲线图)

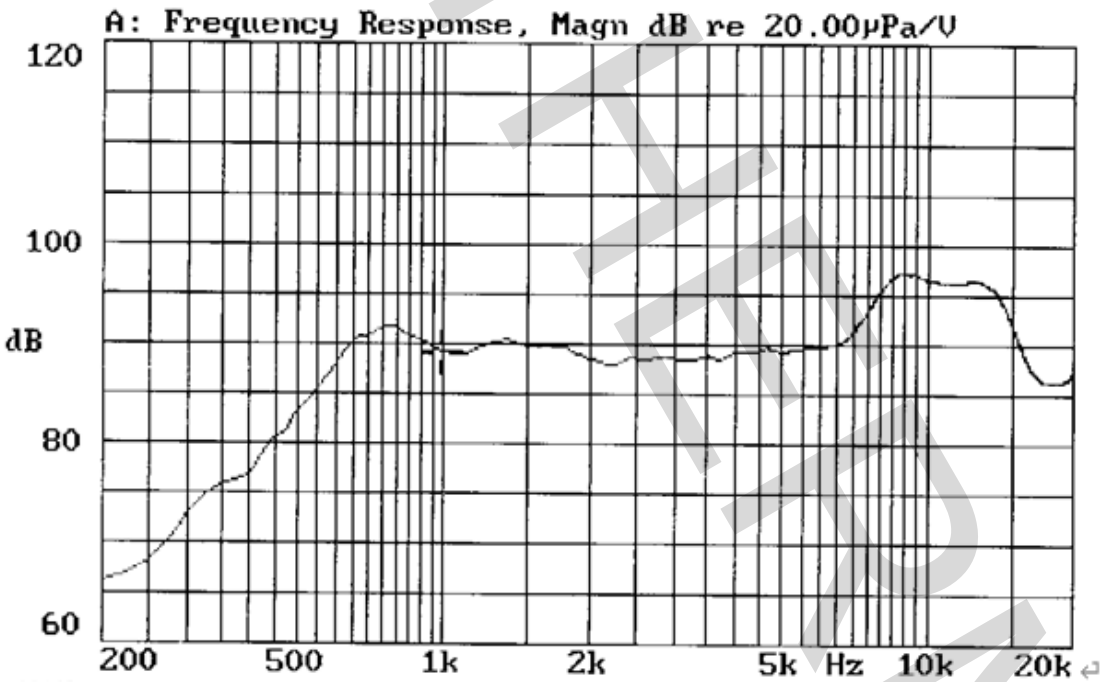

	Part name	Alnico Magnetic Speaker(Plastic)	Date	2026-09-08
	Part number	S-15-8R0.5W-CZW01	Edition	V2.0
	Department		Page	4 / 5

6.DIMENSIONS（尺寸）

Unless otherwise specified, tolerance: ± 0.3 (unit: mm)

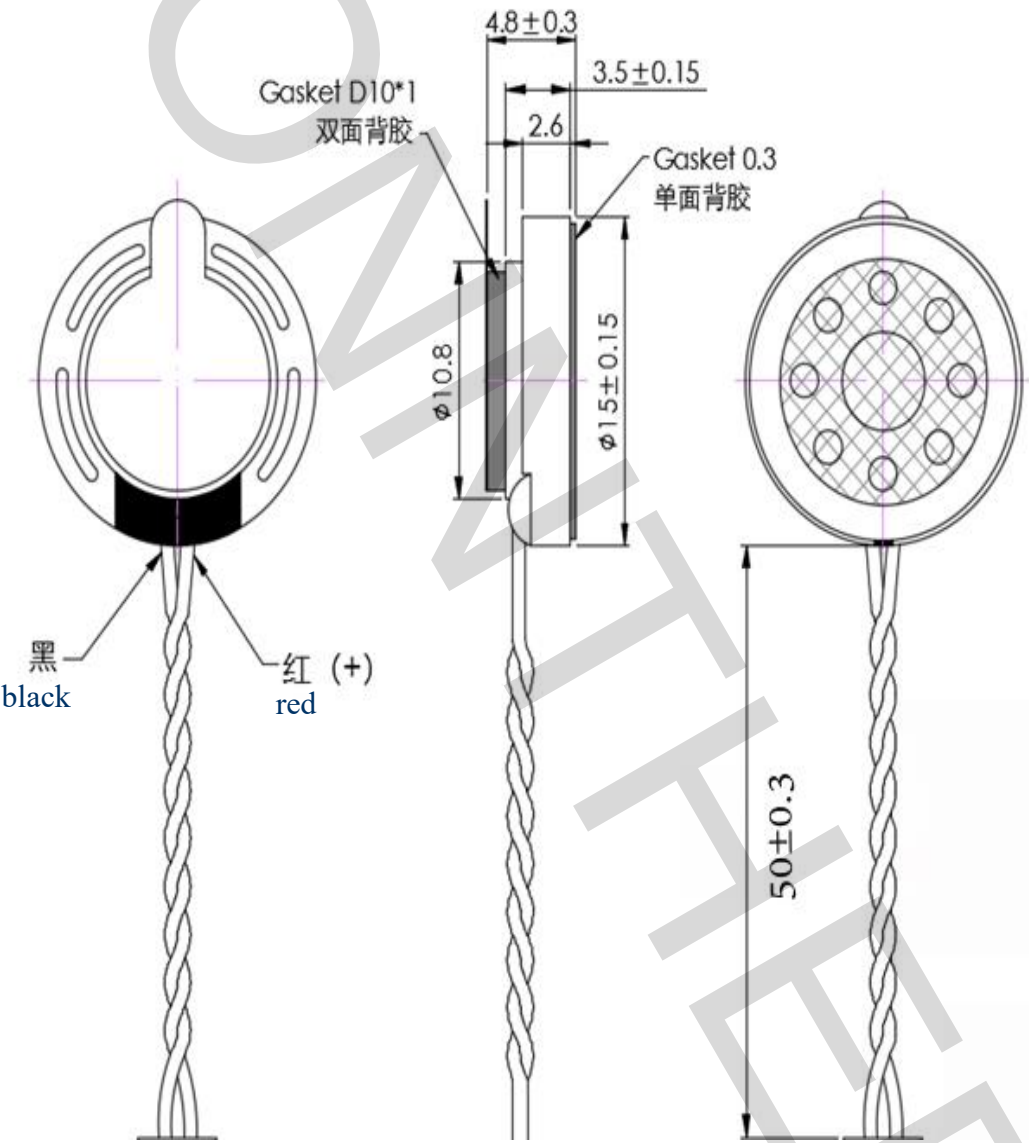

	Part name	Alnico Magnetic Speaker(Plastic)	Date	2026-09-08
	Part number	S-15-8R0.5W-CZW01	Edition	V2.0
	Department		Page	5 / 5

7.PACKAGING PARAMETERS (包装参数)

每盘100个 100pcs of speaker in each tray

每箱20盘 20 trays in one carton

总计:2000个/ 1箱 Total:2000 pcs / 1 carton

