


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA193283R1000	Easy&Safe	432RAU6	Panel mounted socket	3P+N+E	Red

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	200/346 - 240/415 V	6 h	50 Hz 60 Hz	IP44	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 10 mm ²	12 - 10 AWG	Screw	85x85	Angled (20°)	0.28 Kg



CE
IEC 60309

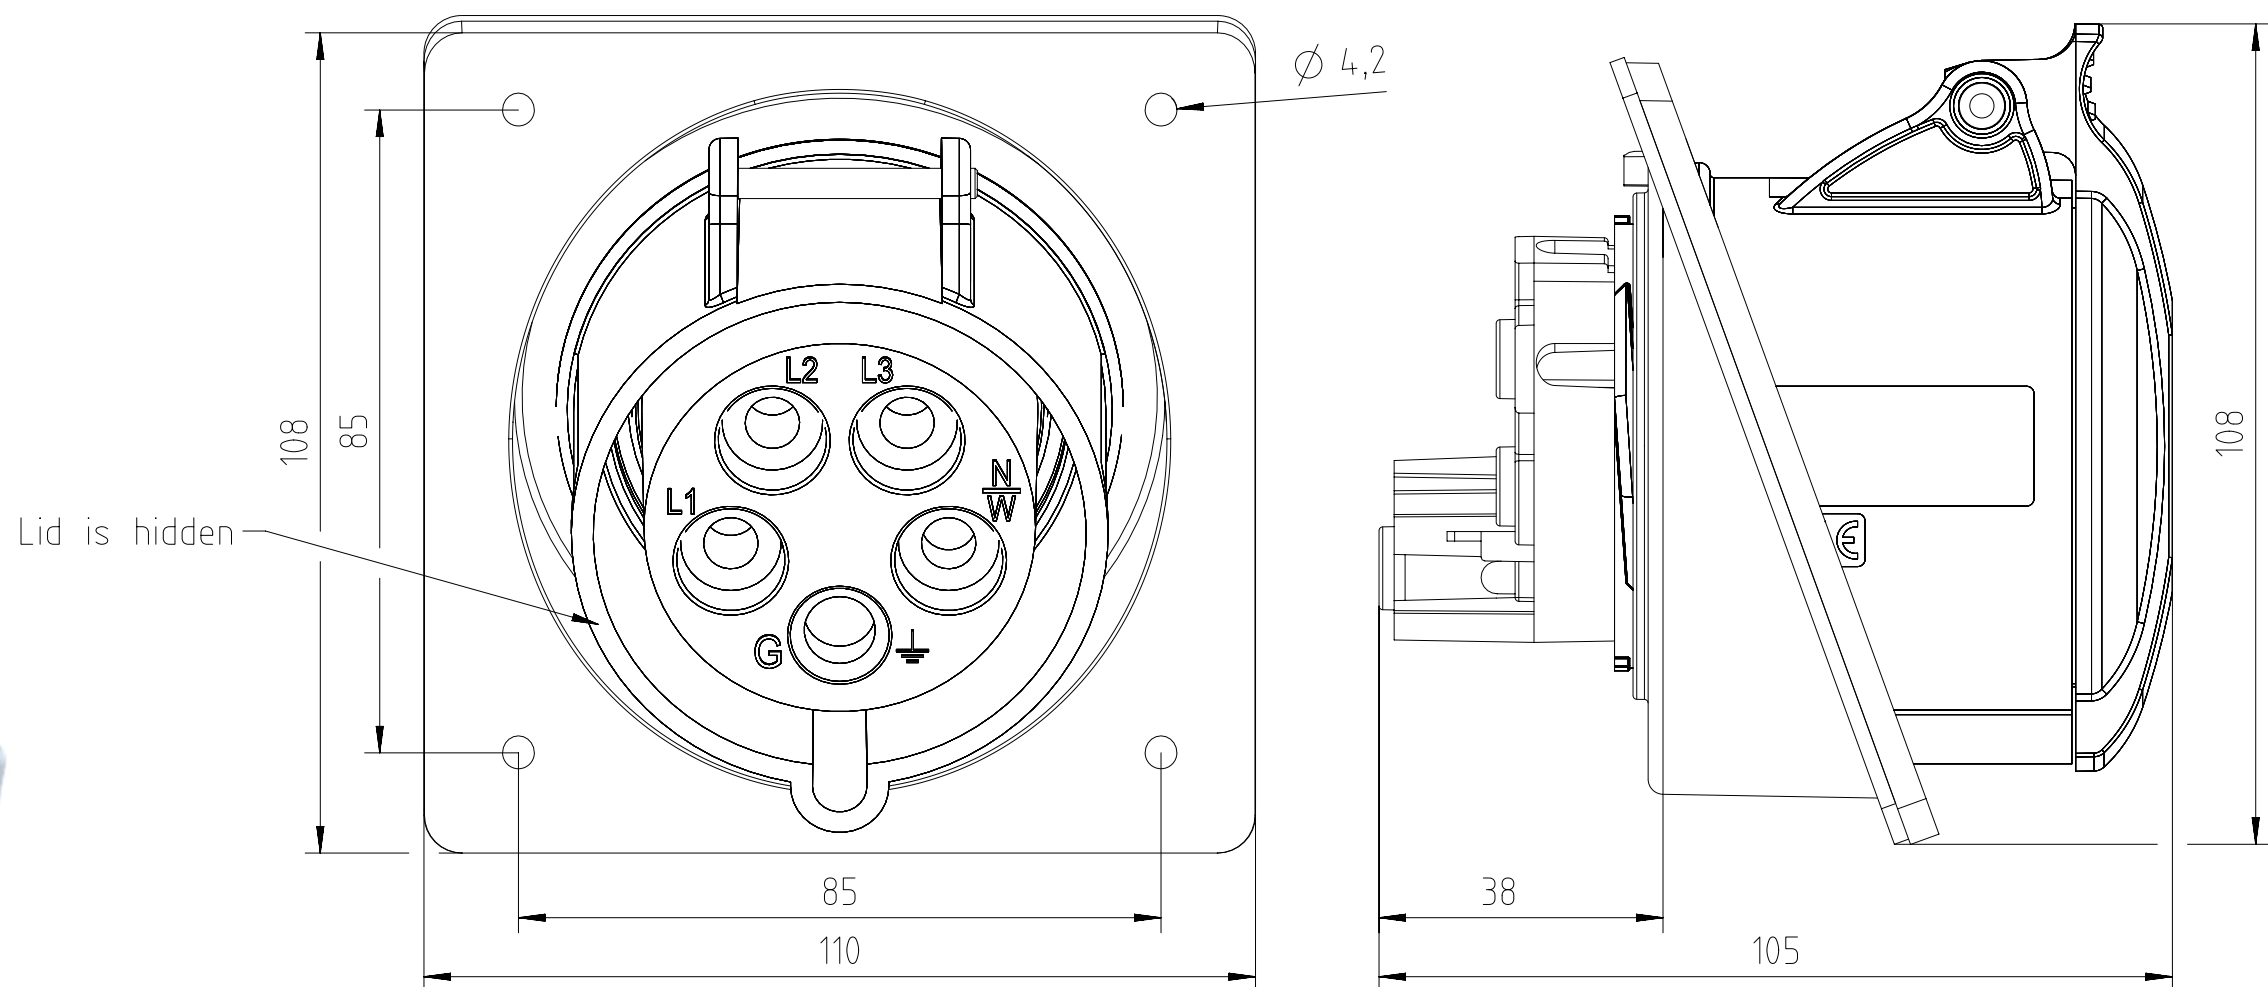

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 280 g				Zul. Abw./Tolerances:		Maßstab / Scale: 1:1		A3			
 Prüfmaß / Testdimension				ISO 2768-m		 DIN / ISO 13715		CUSTOMER DRAWING			
Teileindex / Partindexnumber:											
minor change:								432RAU6 Panel mounted socket Panel mounted socket			
				Gez.	20.01.2025						
				Drawn	WBENHASSINE						
				Status	Released						
				Gepr.	06.02.2025						
				Checked	HBENMANAA				M 2CMA193283R1000		
				Amphenol Tuchel Industrial GmbH							
01	2024-00052	04.02.2025	WBEN						Blatt/ Sheet 1		
Index	Änderung/Description	Datum/Date	Name						1 Bl.		
						Ers. f. / Replacement for:					