


DC Brushless FAN
60x60x25m-B Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:65g(Weight:65g)



P@Q CURVE(AT RATEDVOLTAGE)

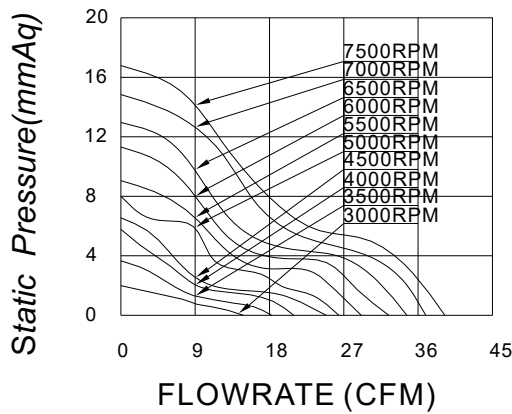

DIMENSIONS DRAWING(unit:mm)

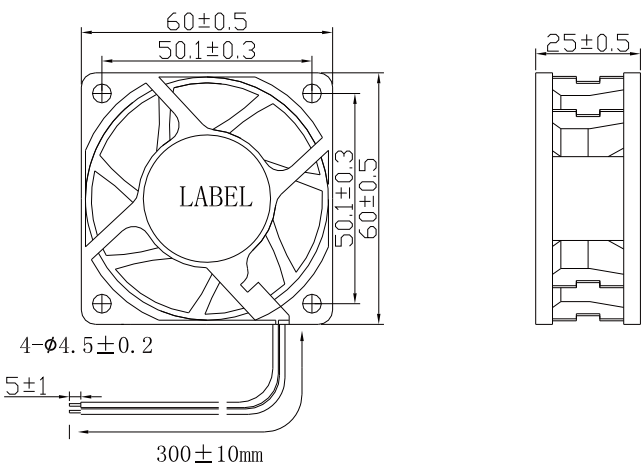

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY
X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)
Y means special function code, it will be used for a certain parts no. or client.
产品型号 12038H12X; 附加代码 AY. X是一个不确定值, 它代表了不同的轴承类型, S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)
Y是一个不确定的值, 它代表不同特殊风机功能, 由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operations Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	BY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG6025L05X		5	1.8~3.3-6	0.24	1.2	3000	0.443	15.6	2.92	0.115	26.0
MG6025M05X		5	1.8~3.3-6	0.36	1.8	3500	0.523	18.4	3.87	0.152	28.7
MG6025H05X		5	1.8~3.3-6	0.48	2.4	4000	0.602	21.2	5.15	0.203	31.8
MG6025HH05X		5	1.8~3.3-6	0.6	3.0	4500	0.685	24.1	6.46	0.254	35.5
MG6025MV05X		5	1.8~3.3-6	0.72	3.6	5000	0.758	26.7	7.94	0.313	38.0
MG6025L12X		12	7~13.5	0.1	1.2	3000	0.443	15.6	2.92	0.115	26.0
MG6025M12X		12	7~13.5	0.15	1.8	3500	0.523	18.4	3.87	0.152	28.7
MG6025H12X		12	7~13.5	0.2	2.4	4000	0.602	21.2	5.15	0.203	31.8
MG6025HH12X		12	7~13.5	0.25	3.0	4500	0.685	24.1	6.46	0.254	35.5
MG6025MV12X		12	7~13.5	0.3	3.6	5000	0.758	26.7	7.94	0.313	38.0
MG6025VM12X		12	7~13.5	0.35	4.2	5500	0.827	29.2	9.23	0.364	39.9
MG6025HV12X		12	7~13.5	0.38	4.56	6000	0.902	31.8	11.15	0.439	42.2
MG6025VH12X		12	7~13.5	0.40	4.8	6500	0.982	34.6	13.09	0.515	44.8

MG6025HHV12X	BY	12	7~13.5	0.45	5.4	7000	1.048	37.0	14.82	0.583	46.0
MG6025VHH12X		12	7~13.5	0.5	6.0	7500	1.119	39.5	16.83	0.663	49.5
MG6025L24X		24	18~26.5	0.05	1.2	3000	0.443	15.6	2.92	0.115	26.0
MG6025M24X		24	18~26.5	0.075	1.8	3500	0.523	18.4	3.87	0.152	28.7
MG6025H24X		24	18~26.5	0.1	2.4	4000	0.602	21.2	5.15	0.203	31.8
MG6025HH24X		24	18~26.5	0.125	3.0	4500	0.685	24.1	6.46	0.254	35.5
MG6025MV24X		24	18~26.5	0.15	3.6	5000	0.758	26.7	7.94	0.313	38.0
MG6025VM24X		24	18~26.5	0.175	4.2	5500	0.827	29.2	9.23	0.364	39.9
MG6025HV24X		24	18~26.5	0.19	4.56	6000	0.902	31.8	11.15	0.439	42.2
MG6025VH24X		24	18~26.5	0.2	4.8	6500	0.982	34.6	13.09	0.515	44.8
MG6025HHV24X		24	18~26.5	0.225	5.4	7000	1.048	37.0	14.82	0.583	46.0
MG6025VHH24X		24	18~26.5	0.25	6.0	7500	1.119	39.5	16.83	0.663	49.5
MG6025H48X		48	36~54	0.05	2.4	4000	0.602	21.2	5.15	0.203	31.8
MG6025HH48X		48	36~54	0.063	3.0	4500	0.685	24.1	6.46	0.254	35.5
MG6025MV48X		48	36~54	0.075	3.6	5000	0.758	26.7	7.94	0.313	38.0
MG6025VM48X		48	36~54	0.088	4.2	5500	0.827	29.2	9.23	0.364	39.9
MG6025HV48X		48	36~54	0.095	4.56	6000	0.902	31.8	11.15	0.439	42.2
MG6025VH48X		48	36~54	0.1	4.8	6500	0.982	34.6	13.09	0.515	44.8
MG6025HHV48X		48	36~54	0.113	5.4	7000	1.048	37.0	14.82	0.583	46.0
MG6025VHH48X		48	36~54	0.125	6.0	7500	1.119	39.5	16.83	0.663	49.5