


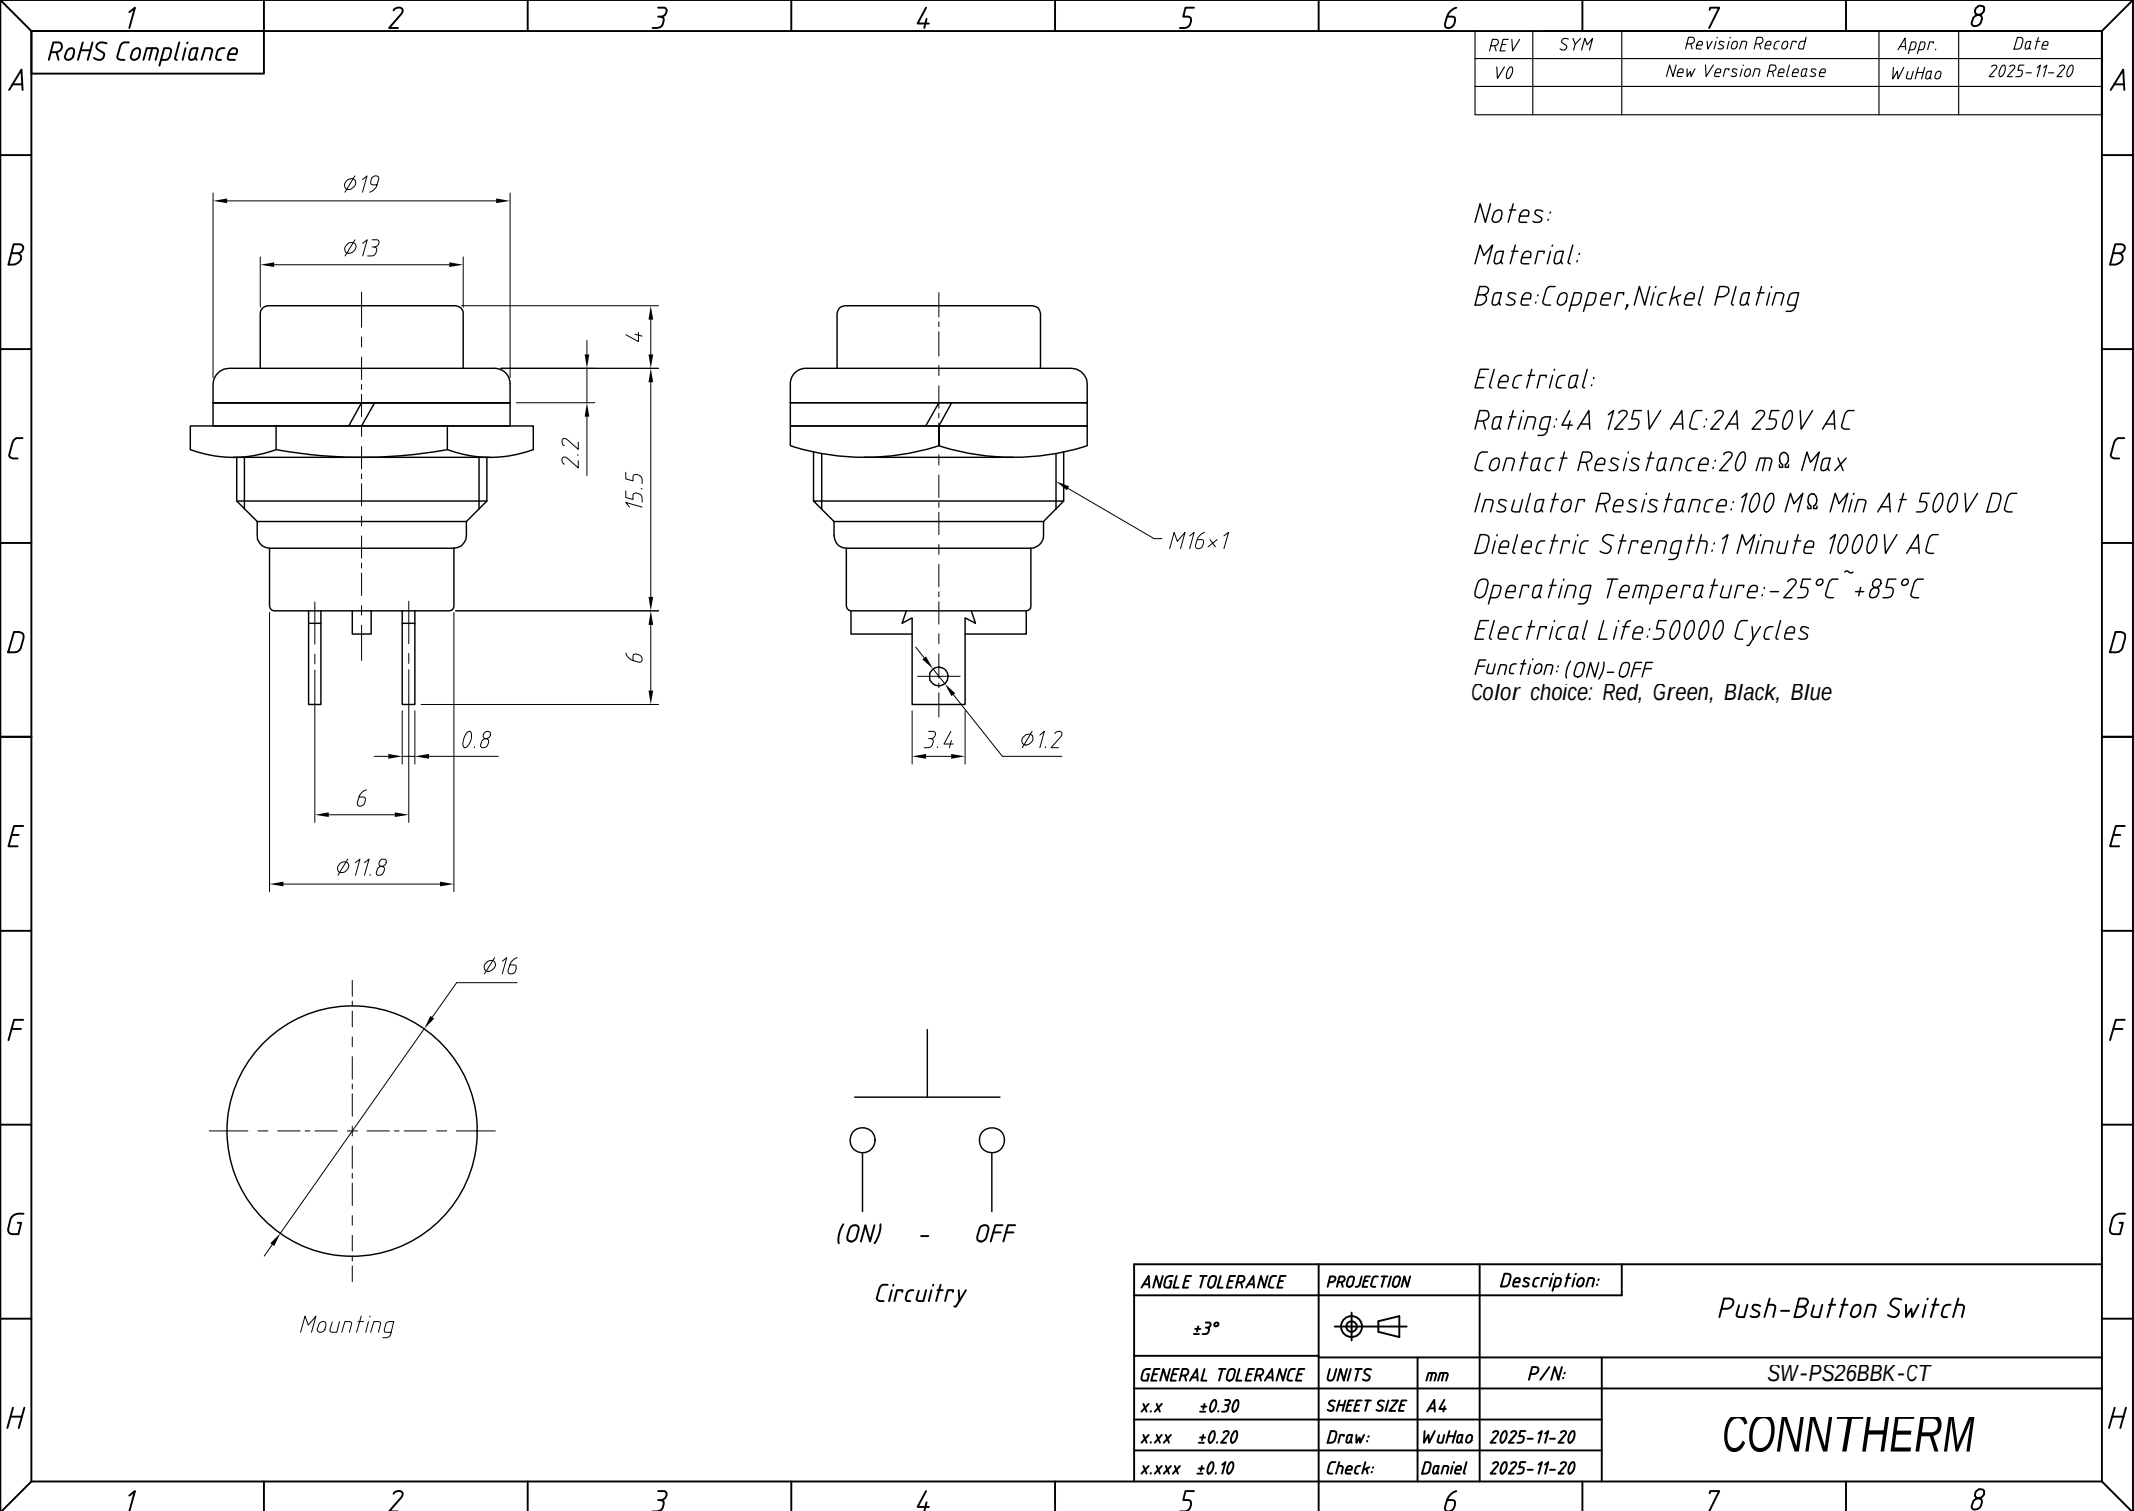


RoHS Compliance

REV	SYM	Revision Record	Appr.	Date
V0		New Version Release	WuHao	2025-11-20

Notes:
Material:
Base:Copper,Nickel Plating

Electrical:
Rating:4A 125V AC:2A 250V AC
Contact Resistance:20 m Ω Max
Insulator Resistance:100 M Ω Min At 500V DC
Dielectric Strength:1 Minute 1000V AC
Operating Temperature:-25 $^{\circ}$ C~+85 $^{\circ}$ C
Electrical Life:50000 Cycles
Function: (ON)-OFF
Color choice: Red, Green, Black, Blue



Circuitry

ANGLE TOLERANCE	PROJECTION		Description:		
$\pm 3^{\circ}$			Push-Button Switch		
GENERAL TOLERANCE	UNITS	mm	P/N:	SW-PS26BBK-CT	
x.x ± 0.30	SHEET SIZE	A4		CONNTHERM	
x.xx ± 0.20	Draw:	WuHao	2025-11-20		
x.xxx ± 0.10	Check:	Daniel	2025-11-20		