

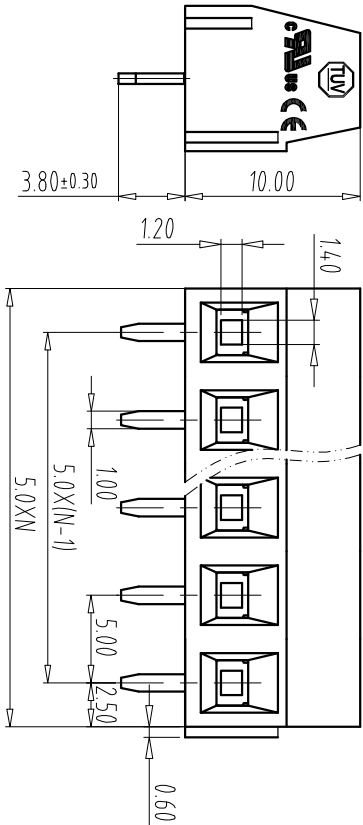


REV	E.C.N NO.	CONTENT	CHK	DATE

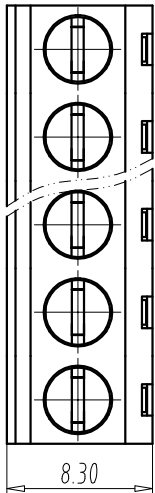

- NOTES1:
- UL Standard
1. Rating voltage/current: 300V/12A
 2. Wire range: 14~26AWG
- IEC Standard
- 1.

Insulation Degree	2
Overvoltage Category	II
Rated Impulse Voltage(kV)	4kV
Rated Voltage(V)	250V
Rated Current(A)	15A

2. wire range: 0.75-1.5mm²

- NOTES2:
- 1.Housing(2P): PA66(UL94V-0)
 - 2.Housing(3P): PA66(UL94V-0)
 - 3.Solder Pin: Brass(Tin Plated)
 - 4.Screw: Steel(M3,Zn Plated)
 - 5.Block: Brass(Ni Plated)

- NOTES3:
- 1.Pitch: 5.0mm Poles: 02-24P
 - 2.Stripping length: 6-7mm
 - 3.Operating temperature: -40℃~+105℃
 - 4.RoHS Compliance


How to order

UL0-TB51 - 127/5.0 - XXP - Y 000A

Certificate Factory poles
Series NO. Code

Customer requirements
color:

- 1:Grey
- 2:Blue
- 3:Black
- 4:Green
- 5:Orange
- 6:Red
- 7:transparent
- 8:Yellow
- 9:White

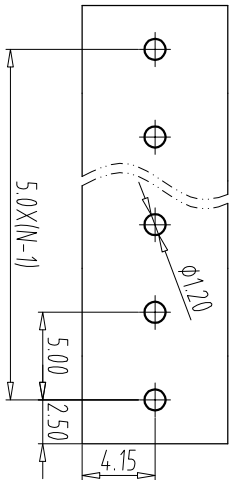

A	Total Pitch Tolerances															Nominal dimension range													T		=		—		//	
	over	0	to	53	70	90	115	150	200	250	0	30	53	70	90	115	150	200	250	0	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over

±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.55	±0.70	±0.75	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
-------	-------	-------	------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	LZW	DATE	21.06.07	UNITS	MM
CHK	DATE			SCALE	1:1
APP.	DATE			NAME	UL0-TB53-127/5.0-XXP-Y000A
NINGBO UL0 ELECTRONICS CO.,LTD.				DWGNO.	UL0TB51Y000A