
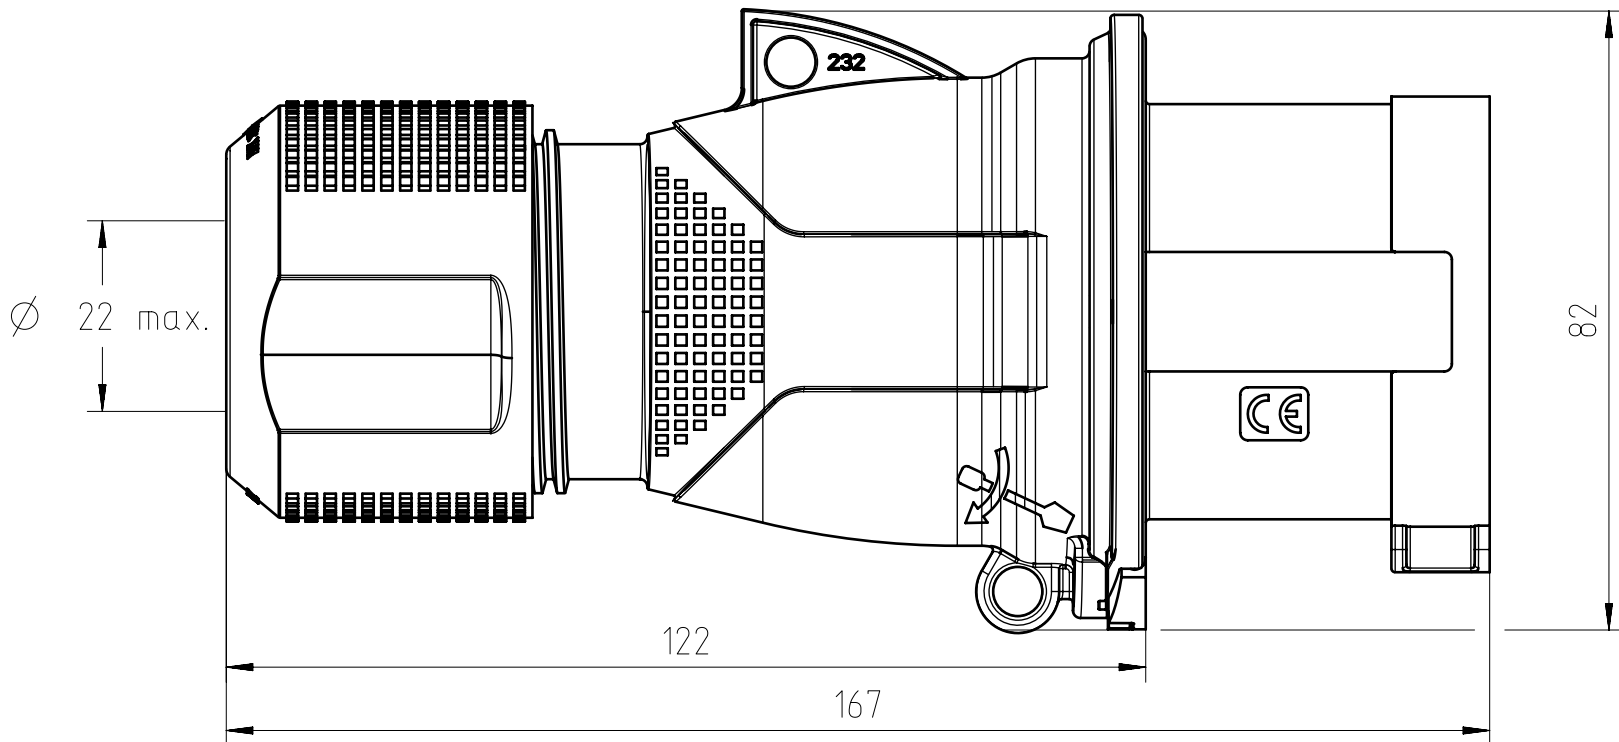


Amphenol Global ID	Product Group	Product Type	Function	Additional Information	Color
2CMA101985R1000	Easy&Safe	332EP7	Plug	3P+E	Black

Rated Current	Rated Voltage	Clock position	Frequency	Degree of Protection	Housing Material
32 A	480 - 500 V	7 h	50 Hz 60 Hz	IP44	Plastic (PA)

Cable Cross Section	Wire Size	ConnectionType	Mounting Holes	Plug Angle	Product Weight
2.5 - 6mm ²	12 - 10 AWG	Screw		Straight	0.23 Kg

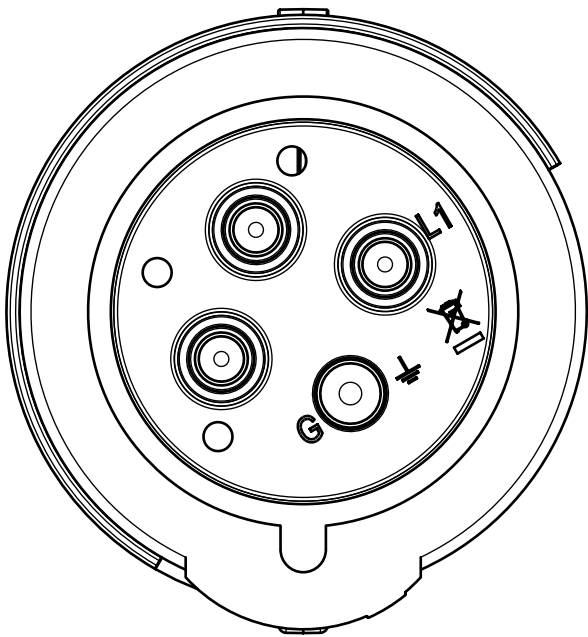

IEC 60309

All dimensions are in mm.

Gewicht (errechnet) / Calc WT: 230 g				Zul. Abw./Tolerances:		Maßstab / Scale : 1:1		A3			
Prüfmaß / Testdimension						ISO 2768-m		DIN / ISO 13715			
Teileindex / Partindexnumber:						CUSTOMER DRAWING					
minor change:											
				Gez. 06.12.2025		332EP7 Industrial Plug					
				Drawn WBENHASSINE							
				Status Released							
				Gepr. 09.12.2025							
				Checked HBENMANAA		M 2CMA101985R1000					
				Amphenol Tuchel Industrial GmbH							
01	202500075	07.12.2025	WBEN			Blatt/ Sheet 1					
Index	Änderung/ Description	Datum/ Date	Name			1 BL					
						Ers. f. / Replacement for :					

Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadensersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.