




JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.
DFNWB2×2-6L Plastic-Encapsulate MOSFETS

CJM2004 N-Channel MOSFET

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
20V	6.0 mΩ@4.5V	15A
	6.5 mΩ@3.8V	
	7.2 mΩ@3.1V	
	8.5 mΩ@2.5V	

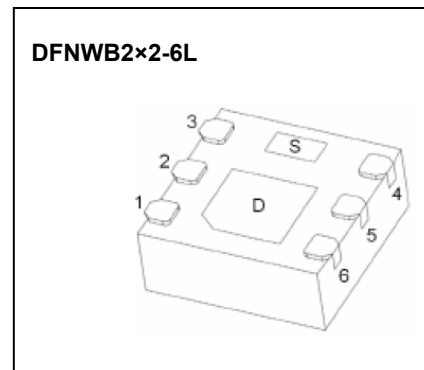

FEATURE

- TrenchFET Power MOSFET
- Excellent $R_{DS(on)}$
- Low Gate Charge
- High Power and Current Handling Capability
- Surface Mount Package

APPLICATION


- Battery Protection
- Load Switch
- Power Management

MARKING



M2004 = Part No.
 Solid dot = Pin1 indicator.
 XX = Code.

Equivalent Circuit



ABSOLUTE MAXIMUM RATINGS ($T_a=25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	20	V
Gate-Source Voltage	V_{GS}	± 10	V
Continuous Drain Current	I_D	15	A
Pulsed Drain Current (note 1)	I_{DM}	50	A
Thermal Resistance from Junction to Ambient (note 2)	$R_{\theta JA}$	250	$^\circ\text{C/W}$
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature	T_{STG}	-55~+150	$^\circ\text{C}$
Lead Temperature for Soldering Purposes(1/8" from case for 10 s)	T_L	260	$^\circ\text{C}$

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$ unless otherwise specified


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
STATIC CHARACTERICTISCS						
Drain-source breakdown voltage	V _{(BR)DSS}	V _{GS} = 0V, I _D =250μA	20			V
Zero gate voltage drain current	I _{DSS}	V _{DS} =16V,V _{GS} = 0V			1	μA
Gate-body leakage current	I _{GSS}	V _{GS} =±10V, V _{DS} = 0V			±100	nA
Gate threshold voltage (note 3)	V _{GS(th)}	V _{DS} =V _{GS} , I _D =250μA	0.5	0.7	1.0	V
Drain-source on-resistance (note 3)	R _{DS(on)}	V _{GS} =4.5V, I _D =4A		6.0	7.5	mΩ
		V _{GS} =3.8V, I _D =4A		6.5	8.2	mΩ
		V _{GS} =3.1V, I _D =4A		7.2	9.0	mΩ
		V _{GS} =2.5V, I _D =4A		8.5	12.0	mΩ
Forward tranconductance (note 3)	g _{FS}	V _{DS} =5V, I _D =7A	9			S
Diode forward voltage (note 3)	V _{SD}	I _S =1.25A, V _{GS} = 0V			1.2	V
DYNAMIC CHARACTERICTISCS (note4)						
Input Capacitance	C _{iss}	V _{DS} =10V,V _{GS} =0V,f =1MHz		1850		pF
Output Capacitance	C _{oss}			250		pF
Reverse Transfer Capacitance	C _{rss}			210		pF
SWITCHING CHARACTERICTISCS (note 4)						
Turn-on delay time	t _{d(on)}	V _{DD} =10V,V _{GS} =5V, R _L =1.35Ω ,R _{GEN} =3Ω		2.2		ns
Turn-on rise time	t _r			5.9		ns
Turn-off delay time	t _{d(off)}			40		ns
Turn-off fall time	t _f			90		ns
Total Gate Charge	Q _g	V _{DS} =10V,V _{GS} =4.5V,I _D =7A		17		nC
Gate-Source Charge	Q _{gs}			2.0		nC
Gate-Drain Charge	Q _{gd}			5.1		nC

Notes :





1. Repetitive rating: Pulse width limited by maximum junction temperature
2. Surface mounted on FR4 board using 1 square inch pad size, 1oz single-side copper.
3. Pulse test : Pulse width $\leq 300\mu s$, duty cycle $\leq 2\%$.
4. Guaranteed by design, not subject to production.

Typical Characteristics


Output Characteristics

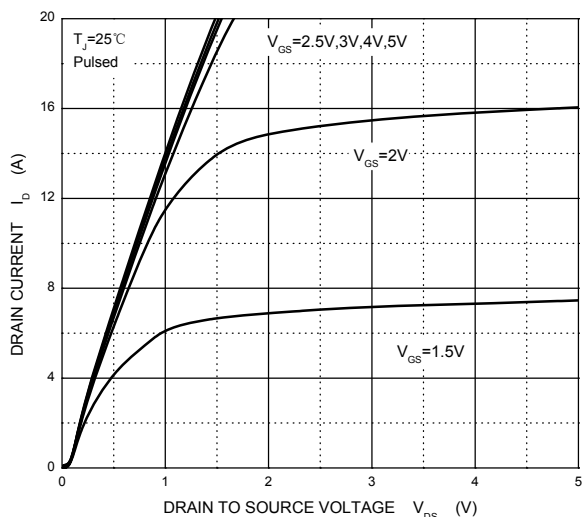


Transfer Characteristics

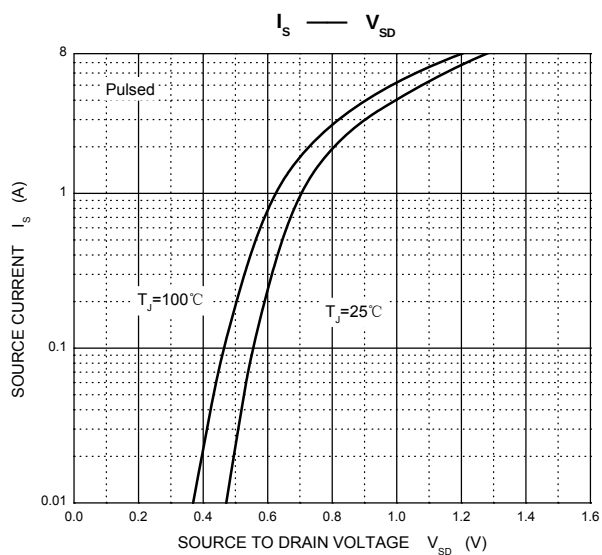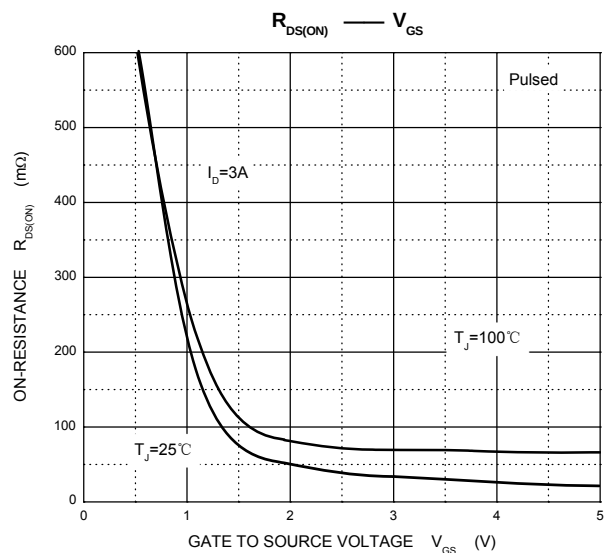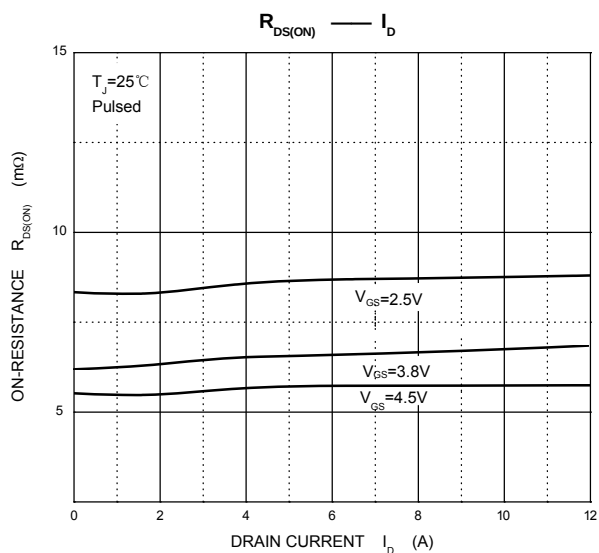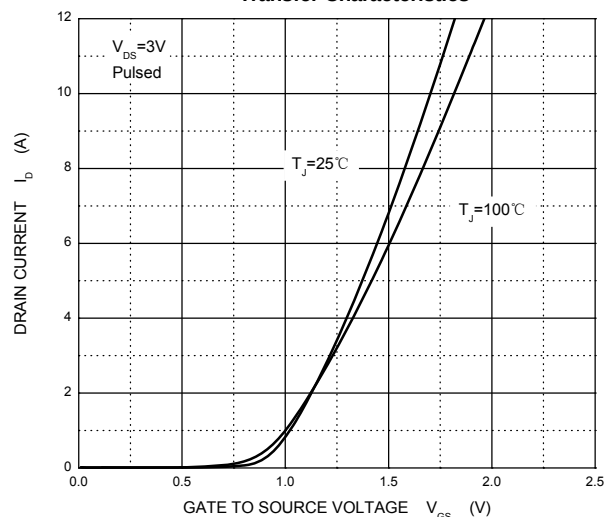


Threshold Voltage

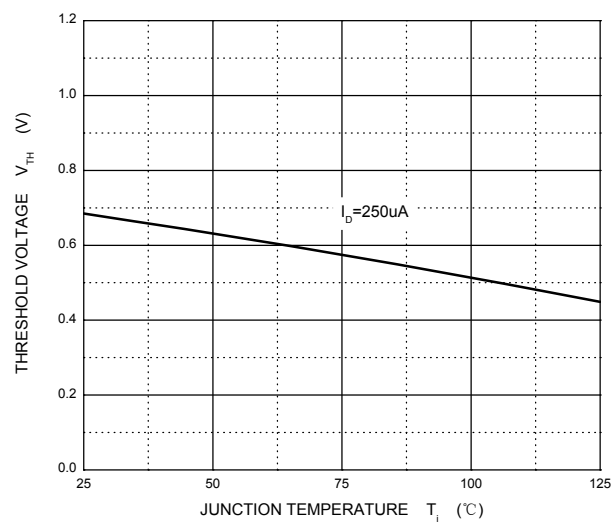


DFNWB2×2-6L-J Package Outline Dimensions

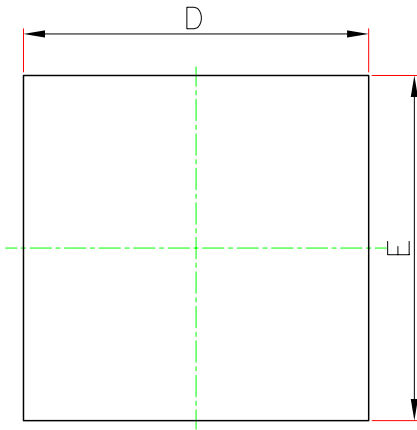

TOP VIEW
[顶视图]

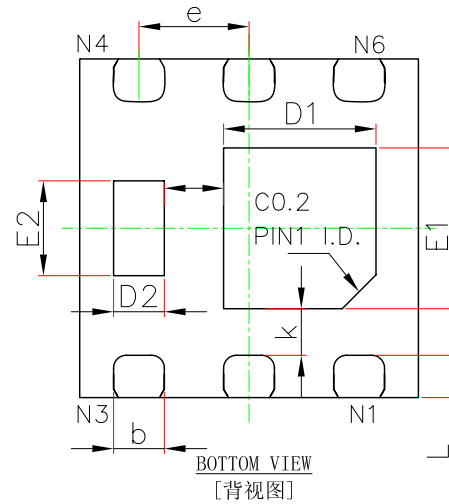


BOTTOM VIEW
[背视图]

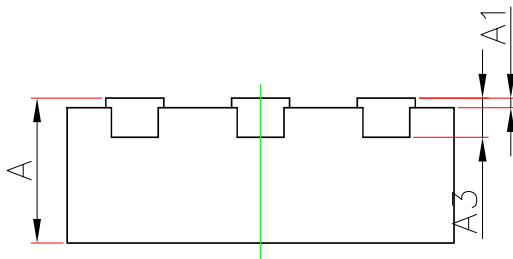

SIDE VIEW
[侧视图]

Symbols	Dimensions in Millimeters		Dimensions in Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203REF.		0.008REF.	
D	1.900	2.100	0.075	0.083
E	1.900	2.100	0.075	0.083
D1	0.800	1.000	0.031	0.039
E1	0.850	1.050	0.033	0.041
D2	0.200	0.400	0.008	0.016
E2	0.460	0.660	0.018	0.026
b	0.250	0.350	0.010	0.014
e	0.650BSC.		0.026BSC.	
k	0.275REF.		0.011REF.	
k1	0.350REF.		0.014REF.	
L	0.174	0.326	0.007	0.013

DFNWB2×2-6L-J Suggested Pad Layout

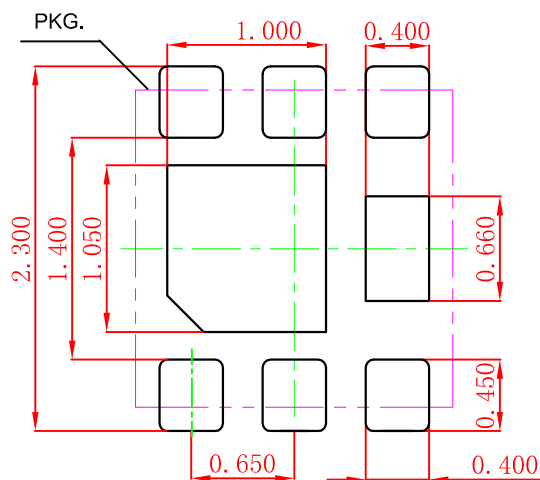

Note:


1. Controlling dimension: in millimeters.
2. General tolerance: $\pm 0.050\text{mm}$.
3. The pad layout is for reference purposes only.

NOTICE

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

DFNWB2X2-6L Tape and Reel


DFNWB2×2-6L Embossed Carrier Tape

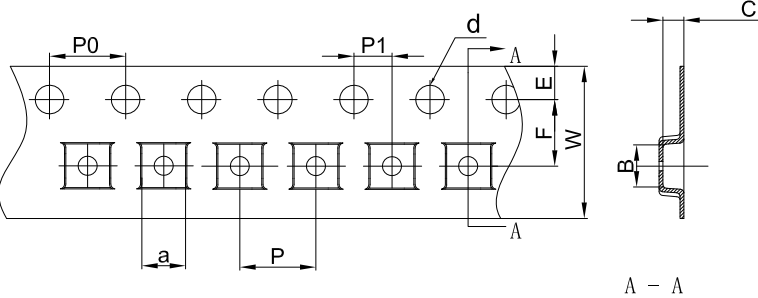


Packaging Description:
DFNWB2×2-6L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 3,000 units per 7" or 18.0cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	a	B	C	d	E	F	P0	P	P1	W
DFNWB2×2-6L	2.30	2.30	1.10	Ø1.50	1.75	3.50	4.00	4.00	2.00	8.00

DFNWB2×2-6L Tape Leader and Trailer

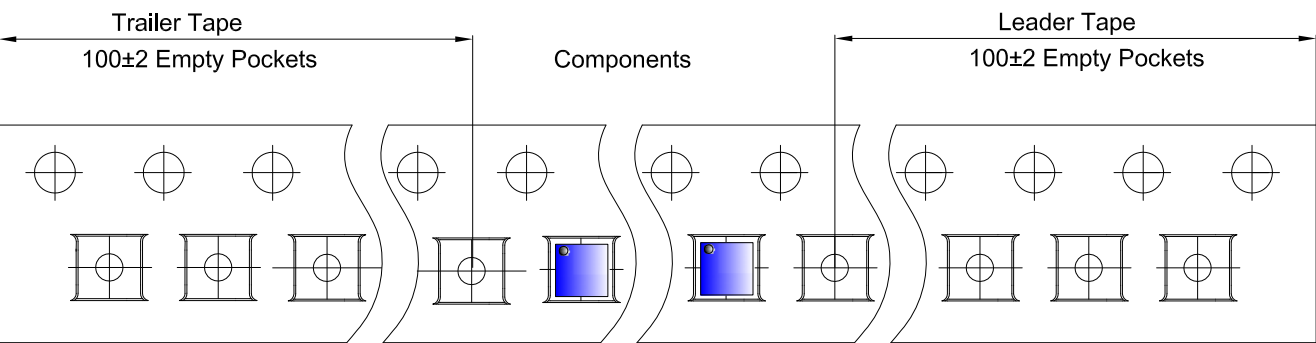

DFNWB2×2-6L Reel

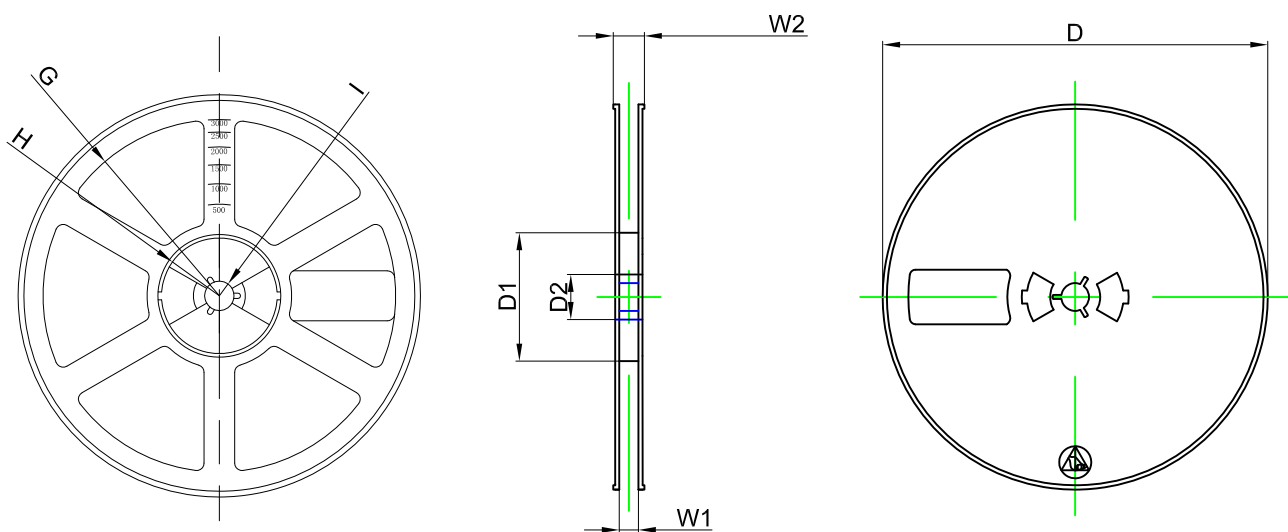

Dimensions are in millimeter								
Reel Option	D	D1	D2	G	H	I	W1	W2
7"Dia	Ø180.00	60.00	13.00	R78.00	R25.60	R6.50	9.50	13.10

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)	G.W.(kg)
3000 pcs	7 inch	30,000 pcs	203×203×195	120,000 pcs	438×438×220	