




JIANGSU CHANGJING ELECTRONICS TECHNOLOGY CO., LTD.

DFNWB3×3-8L Plastic-Encapsulate MOSFET

CJAE10P06 P-Channel Power MOSFET

$V_{(BR)DSS}$	$R_{DS(on)TYP}$	I_D
-60V	26mΩ@-10V	-10A

DFNWB3×3-8L



DESCRIPTION

The CJAE10P06 uses advanced trench technology and design to provide excellent $R_{DS(ON)}$ with low gate charge. It can be used in a wide variety of applications


FEATURES

- Battery switch
- Load switch
- High density cell design for ultra low $R_{DS(ON)}$
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation
- Fully characterized avalanche voltage and current

APPLICATIONS

- SMPS and general purpose applications
- Hard switched and high frequency circuits
- Uninterruptible Power Supply


MARKING



10P06=Part No.
Solid dot=Pin1 indicator.
XX=Code.

PIN 1

EQUIVALENT CIRCUIT



MAXIMUM RATINGS ($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Parameter	Symbol	Limit	Unit
Drain-Source Voltage	V_{DS}	-60	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D ①	-10	A
Pulsed Drain Current	I_{DM} ②	-40	A
Single Pulsed Avalanche Energy	E_{AS} ③	180	mJ
Power Dissipation	P_D ①	30.5	W
Operating Junction and Storage Temperature Range	T_J, T_{stg}	-55~+150	$^{\circ}\text{C}$

Thermal Characteristics

Parameter	Symbol	Typ	Max	Units
Maximum Junction-to-Case	$R_{\theta JC}$ ①	2.5	4.1	$^{\circ}\text{C/W}$
Maximum Junction-to-Ambient	$R_{\theta JA}$ ⑥	22	35	
		52	83.3	

MOSFET ELECTRICAL CHARACTERISTICS

$T_a=25^{\circ}\text{C}$ unless otherwise specified

Parameter	Symbol	Test Condition		Min	Typ	Max	Unit
Off characteristics							
Drain-source breakdown voltage	$V_{(BR)DSS}$	$V_{GS} = 0V, I_D = -250\mu A$		-60			V
Zero gate voltage drain current	I_{DSS}	$V_{DS} = -60V, V_{GS} = 0V$	$T_J = 25^{\circ}C$			1	μA
			$T_J = 125^{\circ}C$			300	
Gate-body leakage current	I_{GSS}	$V_{DS} = 0V, V_{GS} = \pm 20V$				± 100	nA
On characteristics ④							
Gate-threshold voltage	$V_{GS(th)}$	$V_{DS} = V_{GS}, I_D = -250\mu A$		-1.0	-2.2	-3.0	V
Static drain-source on-sate resistance	$R_{DS(on)}$	$V_{GS} = -10V, I_D = -10A$			26	35	mΩ
Dynamic characteristics ④ ⑤							
Input capacitance	C_{iss}	$V_{DS} = -25V, V_{GS} = 0V, f = 1MHz$			4500		pF
Output capacitance	C_{oss}				705		
Reverse transfer capacitance	C_{rss}				515		
Gate resistance	Rg	f = 1MHz			6.0		Ω
Switching characteristics ④ ⑤							
Total gate charge	Q_g	$V_{GS} = -10V, V_{DS} = -30V, I_D = -10A$			52		nC
Gate-source charge	Q_{gs}				12		
Gate-drain charge	Q_{gd}				15		
Turn-on delay time	$t_{d(on)}$	$V_{DD} = -30V, R_G = 3\Omega, R_L = 1.5\Omega, V_{GS} = -10V,$			16		ns
Turn-on rise time	t_r				18		
Turn-off delay time	$t_{d(off)}$				39		
Turn-off fall time	t_f				44		
Drain-Source Diode Characteristics							
Drain-source diode forward voltage	V_{SD} ④	$V_{GS} = 0V, I_S = -1A$				-1.2	V
Continuous drain-source diode forward current	I_S ①					-10	A
Pulsed drain-source diode forward current	I_{SM} ②					-40	A

Notes:

1. $T_C = 25^{\circ}\text{C}$ Limited only by maximum temperature allowed.

2. $P_W \leq 10\mu s$, Duty cycles $\leq 1\%$.







3. EAS condition: $V_{DD} = -15V, V_{GS} = -10V, L = 0.5mH, R_g = 25\Omega$ Starting $T_J = 25^{\circ}\text{C}$.

4. Pulse Test : Pulse Width $\leq 300\mu s$, duty cycle $\leq 2\%$.


5. Guaranteed by design, not subject to production.

6. The value of $R_{\theta JA}$ is measured with the device mounted on 1 in² FR-4 board with 2oz. Copper, in a still air environment with $T_a = 25^{\circ}\text{C}$.


Typical Characteristics

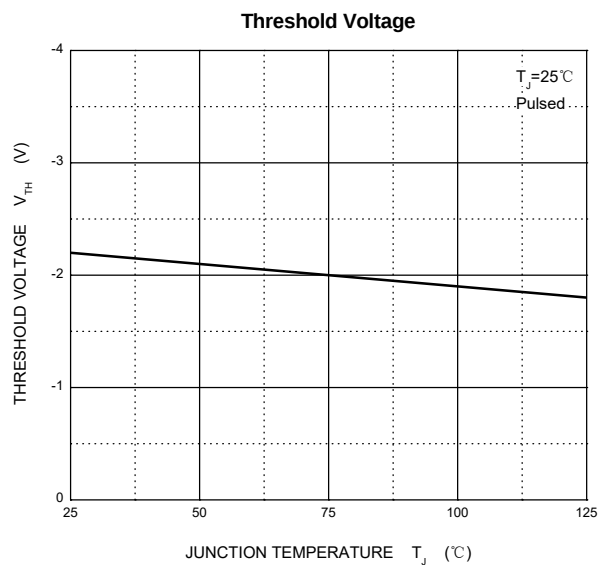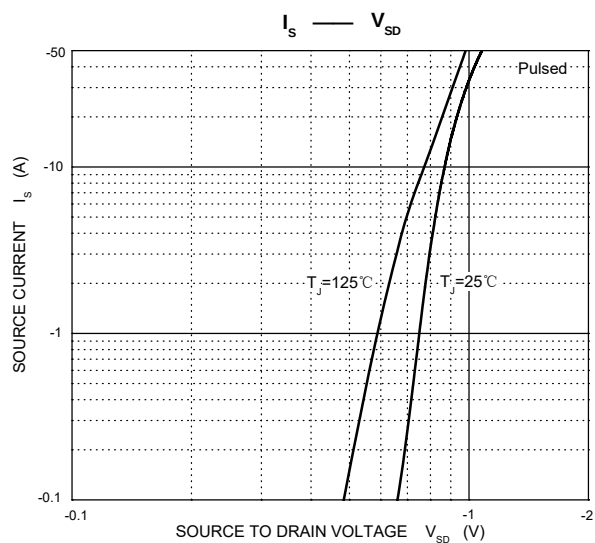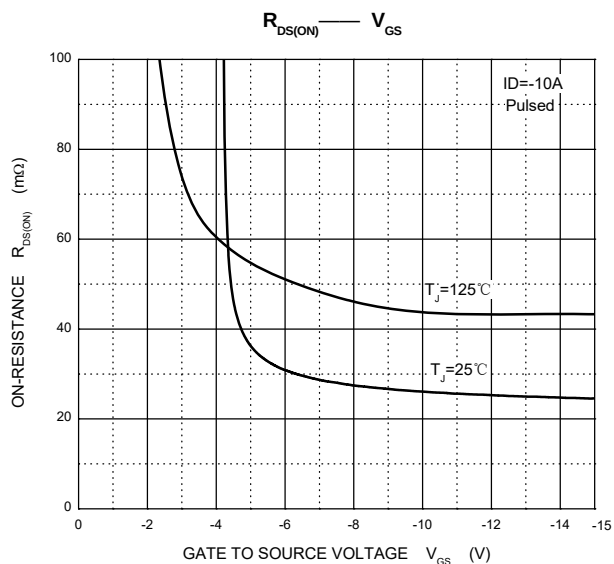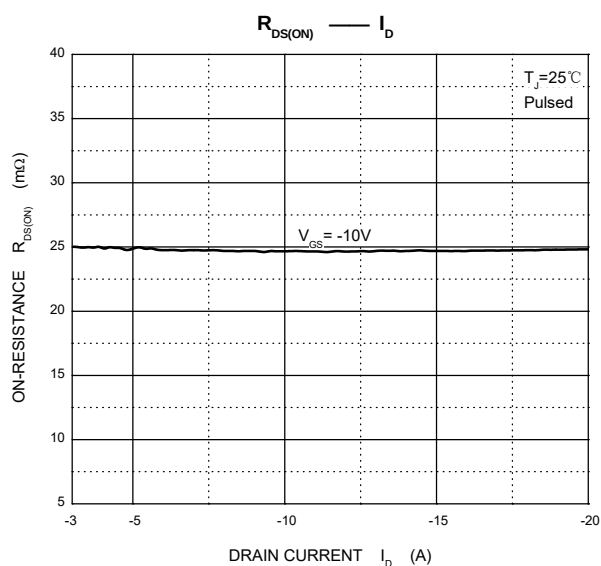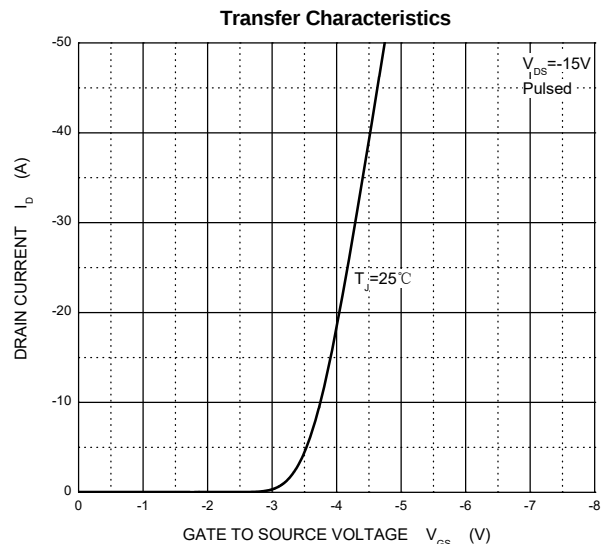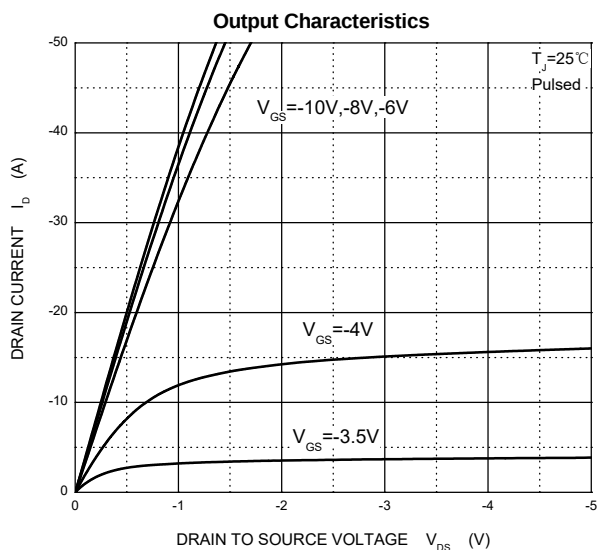

Transient Thermal Impedance, Junction-Case

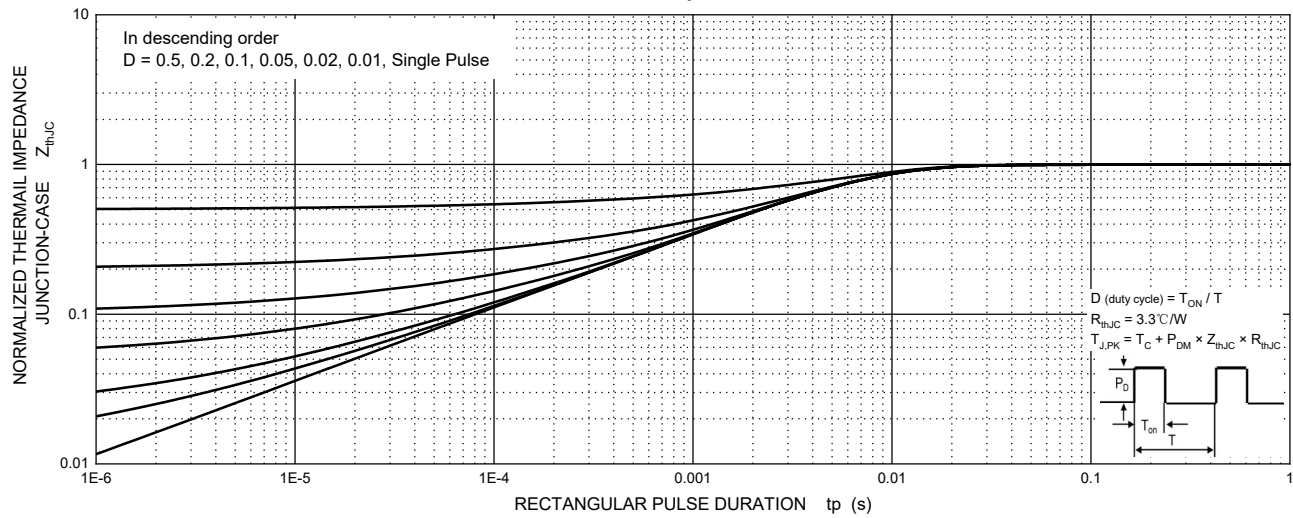

Maximum Safe Operating Area

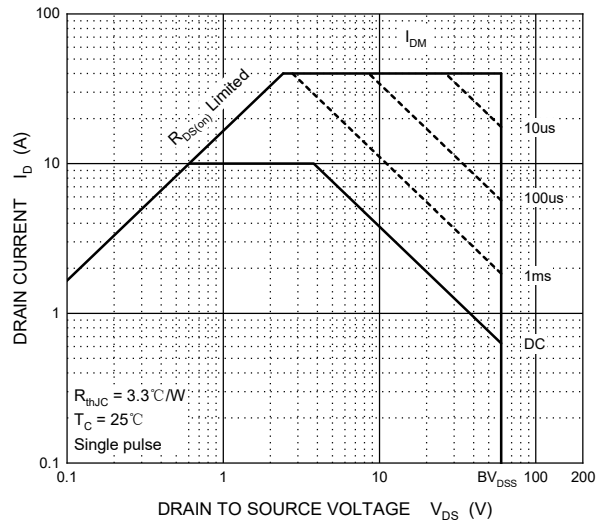


DFNWB3×3-8L Package Outline Dimensions



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A3	0.203 REF.		0.008 REF.	
D	2.924	3.076	0.115	0.121
E	2.924	3.076	0.115	0.121
D1	2.350	2.550	0.093	0.100
E1	1.700	1.900	0.067	0.075
k	0.200 MIN.		0.008 MIN.	
b	0.270	0.370	0.011	0.015
e	0.650 TYP.		0.026 TYP.	
J	0.300	0.500	0.012	0.020


DFNWB3×3-8L Suggested Pad Layout

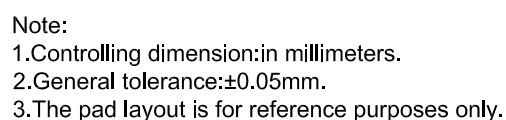

JSCJ reserves the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. JSCJ does not assume any liability arising out of the application or use of any product described herein.

DFNWB3×3-8L Tape and Reel


DFNWB3×3-8L Embossed Carrier Tape

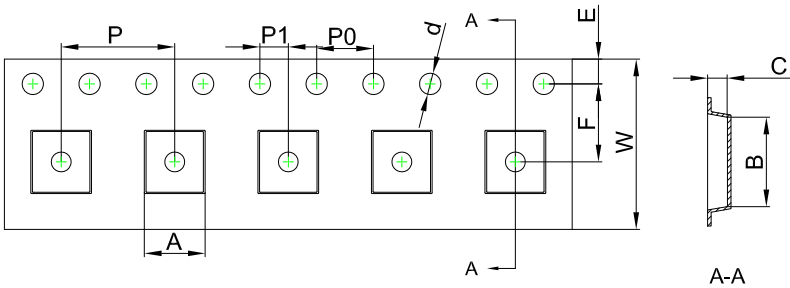


Packaging Description:
DFNWB3x3-8L parts are shipped in tape. The carrier tape is made from a dissipative (carbon filled) polycarbonate resin. The cover tape is a multilayer film (Heat Activated Adhesive in nature) primarily composed of polyester film, adhesive layer, sealant, and anti-static sprayed agent. These reeled parts in standard option are shipped with 5,000 units per 13" or 33.0 cm diameter reel. The reels are clear in color and is made of polystyrene plastic (anti-static coated).

Dimensions are in millimeter										
Pkg type	A	B	C	d	E	F	P0	P	P1	W
DFNWB3×3-8L	3.35	3.35	1.13	Ø1.50	1.75	5.50	4.00	8.00	2.00	12.00

DFNWB3×3-8L Tape Leader and Trailer

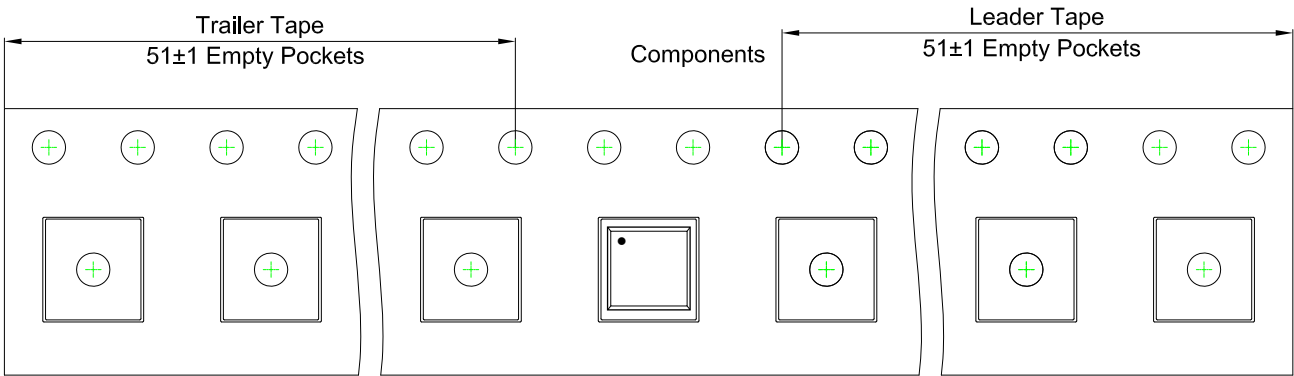

DFNWB3×3-8L Reel

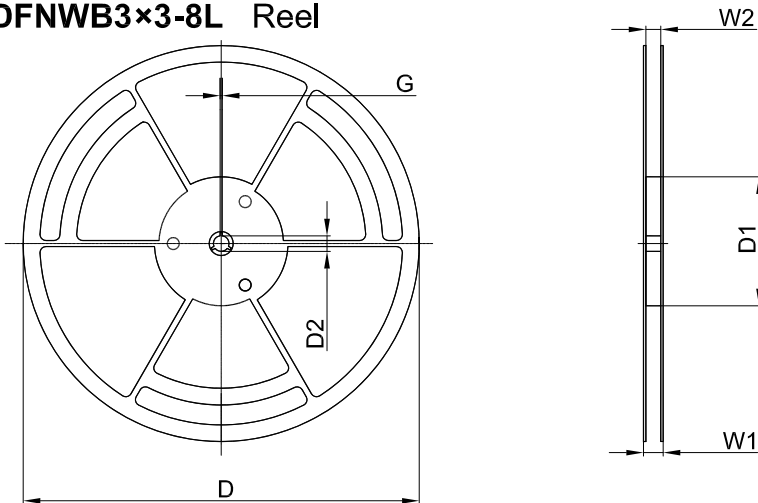

Dimensions are in millimeter						
Reel Option	D	D1	D2	G	W1	W2
13"Dia	Ø330.00	100.00	13.00	1.90	17.60	12.40

REEL	Reel Size	Box	Box Size(mm)	Carton	Carton Size(mm)
5,000 pcs	13 inch	10,000 pcs	360×360×65	50,000 pcs	378×358×382