



CertaDrive

LED Transformers



Datasheet

Economic LED Transformer 30W 24VDC G3

9290 038 81501

Philips full-electronic constant voltage Economic LED Transformers are designed to operate 24VDC LED solutions used in general built-in and independent applications such as non-center piece lighting, retail display lighting and linear accent lighting. They are specifically designed to ensure good performance with high cost-effective.

Features

- Built-in and independent use for Insulation Class II applications
- Stable output voltage
- Wide ambient temperature range
- Protection against overpower and overvoltage
- Output short-circuit shutdown feature with automatic restart

Benefits

- SELV operating voltages, ensuring safety even if wiring or LED boards become damaged
- Energy savings through high efficiency
- High robustness, offering peace of mind and lower maintenance costs
- Easy to design-in and install with parallel wiring
- Global approvals

Application

- Retail display lighting
- Shelf lighting
- Cove lighting
- Façade accent lighting

Logistical data

Specification item	Value
Product name	Economic LED Transformer 30W 24VDC G3
Logistic code 12NC	9290 038 81501
Pieces per box	80
Weight	86 gram

Electrical input data

Specification item	Value	Unit	Condition
Rated input voltage range	220...240	V _{ac}	Performance range
Rated input voltage	230	V _{ac}	
Rated input frequency	50...60	Hz	Performance range
Rated input current	0.2	A	@ rated output power @ rated input voltage
Rated input power	36.0	W	@ rated output power @ rated input voltage
Power factor	0.95		@ rated output power @ rated input voltage
Total harmonic distortion	20	%	@ rated output power @ rated input voltage
Efficiency	88.0	%	@ rated output power @ rated input voltage
Input voltage AC	198...264	V _{ac}	Operational range
Input frequency AC	47...63	Hz	Operational range
Isolation input to output	SELV		

Electrical output data

Specification item	Value	Unit	Condition
Regulation method	Constant Voltage		
Output voltage	24	V _{dc}	Output voltage range: 22.8 ... 25.2VDC @ output current range 0.75 ... 1.25A
Output current	62.5...1250	mA	
Output voltage ripple	≤ 2	%	
Output power	1.5...30.0	W	
Line regulation	≤ 1	%	
Load regulation	≤ 3	%	
Turn-on delay	≤ 0.5	s	
Output voltage rise time	≤ 100	ms	

Control interfaces

Specification item	Value	Unit	Condition
Control method	Fixed		

Wiring and Connections

Specification item	Value	Unit	Type
Input wire cross-section	0.75...2.5 / 18...14	mm ² / AWG	solid / stranded wire
Input wire strip length	6...7	mm	
Output wire cross-section	0.5...2.5 / 20...14	mm ² / AWG	solid / stranded wire
Output wire strip length	6...7	mm	
Maximum cable length	1	m	Total cable length between driver and LED modules per CISPR15




Isolation

Insulation per IEC61347-1	Input	Output
Input	-	SELV
Output	SELV	-

Dimensions and weight

Specification item	Value	Unit	Tolerance (mm)
Length (A1)	135	mm	± 1
Mounting hole distance (A2)	126	mm	± 1
Width (B1)	36	mm	± 0.5
Width (B2)	24	mm	± 0.5
Height (C1)	25	mm	± 0.5
Mounting hole diameter (D1)	4	mm	± 0.5
Weight	86	gram	

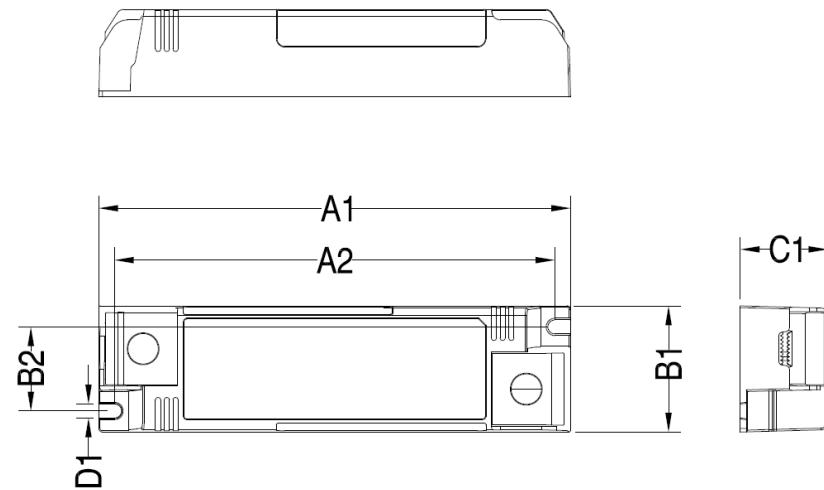


Operational temperatures and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20...+45	°C	Higher ambient temperature allowed as long as T _{case-max} is not exceeded
T _{case-max}	85	°C	Maximum temperature measured at T _{case-point}
T _{case-life}	80	°C	Measured at T _{case-point}
Relative humidity	10...90	%	Non-condensing

Lifetime

Specification item	Value	Unit	Condition
Driver lifetime	30,000	hours	Measured temperature at T _{case-point} is T _{case-life} . Maximum failures = 10%

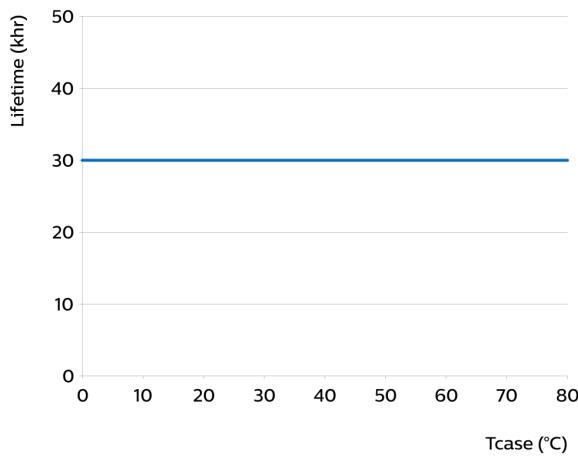

Maximum failures = 10%

Storage temperature and humidity

Specification item	Value	Unit	Condition
Ambient temperature	-20...+85	°C	
Relative humidity	5...95	%	Non-condensing

Non-programmable features


Specification item	Value	Condition
Open load protection	Yes	
Short circuit protection	Yes	Hiccup mode, automatic recovering
Over power protection	Yes	Automatic recovering
Hot wiring	Yes	No load power < 0.50W
Suitable for fixtures with protection class	II	per IEC60598

Inrush current

Specification item	Value	Unit	Condition
Inrush current	28	A	Input voltage 230V
Inrush peak width	138	μs	Input voltage 230V, measured at 50% height
Drivers / MCB 16A type B @230V AC	≤ 29	pcs	Input voltage 230V

Please refer to the driver design in guide if you use other MCB-types.

If several mini circuit breakers are used directly side-by-side (without distance pieces) a correction factor of 80% has to be applied to the rated current

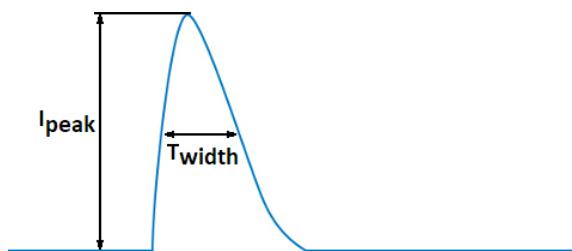

Driver touch current / protective conductor current / earth leakage current

Specification item	Value	Unit	Condition
Typical Touch Current (ins. Class II)	0.7	mA peak	. LED module contribution not included

Surge immunity


Specification item	Value	Unit	Condition
Mains surge immunity (diff. mode)	1	kV	L-N acc. IEC61000-4-5. 2 Ohm

Application Info (Approbation)


Specification item	Value
Approval marks and Certifications	CB / CCC / CE / SELV
Ingress Protection classification (IP)	20
Application	Indoor Constant Voltage
Mounting Type	Built-in / Independent

Graphs


Operating window

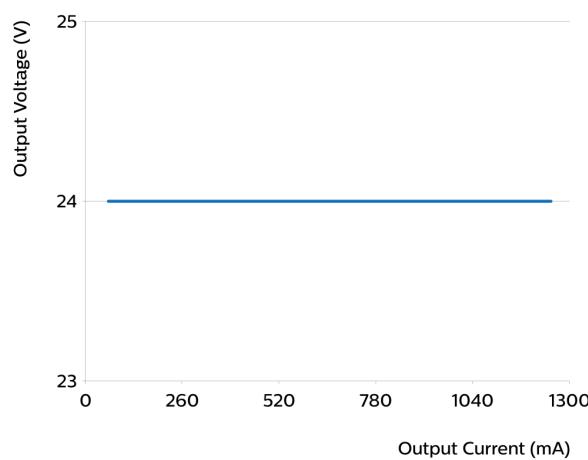


Power factor versus output power

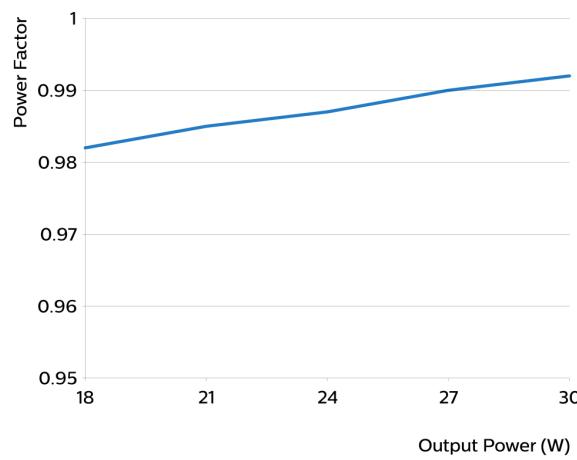

Efficiency versus output power

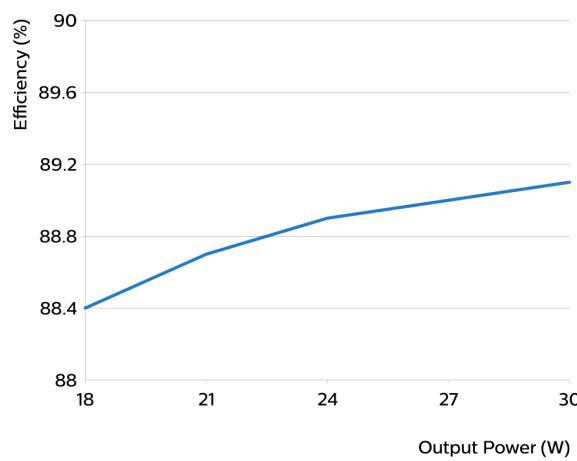

THD versus output power

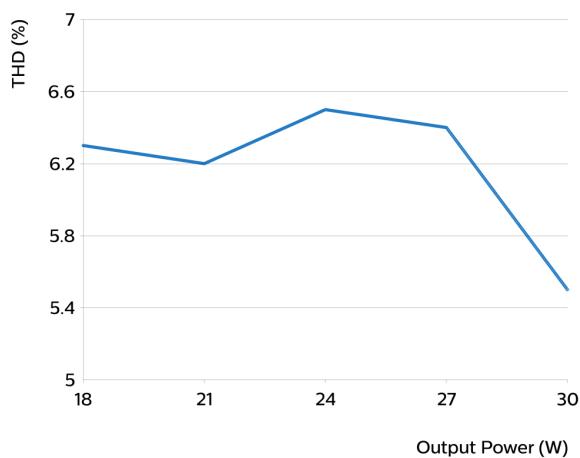

©2025 Signify Holding, IBRS 10461, 5600 VB, NL. All rights reserved.

UK importer address: Signify Commercial UK Limited, 2 Guildford Business Park GU2 8XG, UK

The information provided herein is subject to change without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify.

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

Date of release: August 5, 2025 v1

www.philips.com/oem