


DC Brushless FAN
60x60x25m-A Type


轴承结构：双滚珠、含油、液压、其他
Bearing: two ball、sleeve、HY、other
框外材质: 塑胶(等级:UL94V-0)
Frame:Plastic(Flammability:UL94V-0)
扇叶材质:塑胶:(等级:UL94V-0)
Impeller:Plastic:(Flammability:UL94V-0)
风扇单重:60g(Weight:60g)



P@Q CURVE(AT RATEDVOLTAGE)

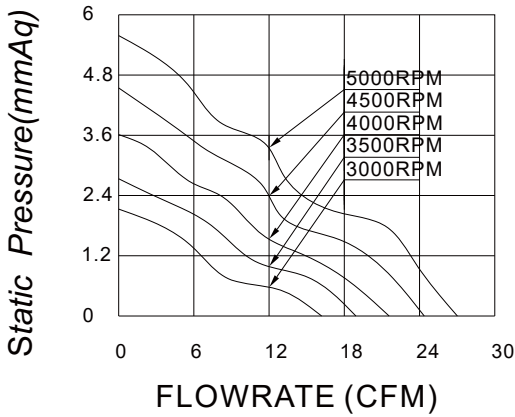

DIMENSIONS DRAWING(unit:mm)

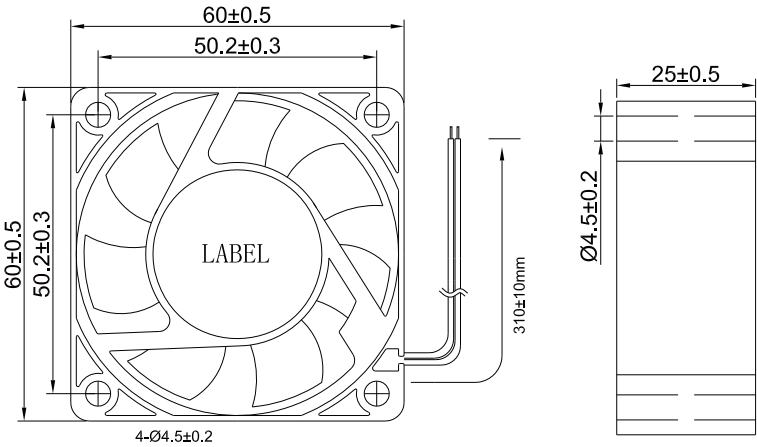

编码规则 Code Rule

例子 Example 12038H12B-1701
12038H12X-AY

Model No. is 12038H12 X; Extro P/N code is AY
X means bearing type, can be S(sleeve bearing), can be B(ball bearing), can be Y(HY bearing), can be SU(sleeve with UL), can be BU(ball with UL), can be YU(HY with UL)
Y means special function code, it will be used for a certain parts no. or client.
产品型号 12038H12X;附加代码 AY. X是一个不确定值,它代表了不同的轴承类型, S(含油轴承), B(滚珠轴承), Y(液压轴承), SU(含油轴承带UL), BU(滚珠轴承带UL), YU(液压轴承带UL)
Y是一个不确定的值,它代表不同特殊风机功能,由具体客户或者料号来确定

Model	P/N Code	Rated Voltage	Operationg Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
型号	P/N 附加码	额定电压	工作电压范围	额定电流	额定输入功率	转速	最大风量		最大风压		噪音
PART.NO.	AY	VDC	VDC	Amp	Watt	R.P.M	M³/min	CFM	mmH2O	InH2O	dB-A
MG6025L12X		12	7~13.5	0.1	1.2	3000	0.446	15.7	2.13	0.084	27.2
MG6025LM12X		12	7~13.5	0.14	1.68	3500	0.535	18.9	2.76	0.109	30.7
MG6025M12X		12	7~13.5	0.17	2.04	4000	0.611	21.5	3.64	0.143	34.3
MG6025H12X		12	7~13.5	0.2	2.4	4500	0.690	24.3	4.63	0.182	37.7
MG6025LH12X		12	7~13.5	0.23	2.76	5000	0.764	26.9	5.56	0.219	40.2
MG6025L24X		24	18~26.5	0.05	1.2	3000	0.446	15.7	2.13	0.084	27.2
MG6025LM24X		24	18~26.5	0.07	1.68	3500	0.535	18.9	2.76	0.109	30.7
MG6025M24X		24	18~26.5	0.085	2.04	4000	0.611	21.5	3.64	0.143	34.3
MG6025H24X		24	18~26.5	0.1	2.4	4500	0.690	24.3	4.63	0.182	37.7
MG6025LH24X		24	18~26.5	0.115	2.76	5000	0.764	26.9	5.56	0.219	40.2
MG6025L48X		48	36~54	0.025	1.2	3000	0.446	15.7	2.13	0.084	27.2
MG6025LM48X		48	36~54	0.035	1.68	3500	0.535	18.9	2.76	0.109	30.7
MG6025M48X		48	36~54	0.04	2.04	4000	0.611	21.5	3.64	0.143	34.3
MG6025H48X		48	36~54	0.05	2.4	4500	0.690	24.3	4.63	0.182	37.7
MG6025LH48X		48	36~54	0.06	2.76	5000	0.764	26.9	5.56	0.219	40.2