

Metallized Polypropylene (PP) - Capacitors for DC-Link Applications. Capacitances from 1.0 μF to 400 μF . Rated Voltages from 400 VDC to 1500 VDC.

Special Features

- Capacitances up to 400 μF
- High volume/capacitance ratio
- Excellent self-healing properties
- Very low dissipation factor
- High reliability
- 2-pin, 4-pin or plate contact configuration
- AEC-Q200 qualified
- According to RoHS 2011/65/EU

Typical Applications

As intermediate circuit capacitor e.g. in high power converter technology, power supplies, solar inverters, e-mobility (battery chargers, motor drives & power train) etc.

Construction

Dielectric:

Polypropylene (PP) film

Capacitor electrodes:

Vacuum-deposited

Internal construction:



Encapsulation:

Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0

Terminations:

Tinned wire or plates.

Marking:

Colour: Red. Marking: Black.

Packing

Packing units at the end of the catalogue

Electrical Data

Capacitance range: 1 μF to 400 μF
(intermediate values on request)

Rated voltages: 400 VDC, 500 VDC, 600 VDC, 800 VDC, 900 VDC, 1100 VDC, 1300 VDC, 1500 VDC

Capacitance tolerances: $\pm 20\%$, $\pm 10\%$, $\pm 5\%$

Operating temperature range:

-55°C to $+105^\circ\text{C}$ (hot spot including self-heating)

Climatic test category: 55/085/56

in accordance with IEC

Insulation resistance at $+20^\circ\text{C}$:

$\geq 30\,000 \text{ sec } (M\Omega \times \mu\text{F})$

Measuring voltage: 100 V/1 min.

Dielectric absorption: 0.05 %

Voltage and current derating:

A derating factor of 1.35% per K must be applied from $+85^\circ\text{C}$ for DC voltages and from $+70^\circ\text{C}$ for AC currents (I_{rms}). Additionally a derating factor of 4.5% per K must be applied from $+85^\circ\text{C}$ for AC currents (I_{rms})

Reliability: Operational life $> 100\,000$ hours (U_r and 70°C)

Failure rate λ_0 ($0.5 \times U_r$ and 40°C)

| $\Pi = C_N [\mu\text{F}] \times U_r [\text{V}] $ | λ_0 |
|---|--------------------|
| $\Pi \leq 10\,000$ | $< 2 \text{ fit}$ |
| $10\,000 < \Pi \leq 25\,000$ | $< 5 \text{ fit}$ |
| $25\,000 < \Pi \leq 50\,000$ | $< 10 \text{ fit}$ |
| $50\,000 < \Pi \leq 100\,000$ | $< 20 \text{ fit}$ |
| $\Pi > 100\,000$ | $< 30 \text{ fit}$ |

Test voltage:

$\leq 500 \text{ VDC}$: $1.5 U_r$, 2sec

$> 500 \text{ VDC}$: $1.2 U_r$, 2sec

Specific dissipation:

| Box size WxHxL in mm | Specific dissipation in Watts per K above the ambient temperature |
|-------------------------|--|
| 9x19x31.5 | 0.021 |
| 11x21x31.5 | 0.025 |
| 13x24x31.5 | 0.030 |
| 15x26x31.5 | 0.034 |
| 17x29x31.5 | 0.039 |
| 17x34.5x31.5 | 0.044 |
| 20x39.5x31.5 | 0.053 |
| 13x24x41.5 | 0.037 |
| 15x26x41.5 | 0.042 |
| 17x29x41.5 | 0.048 |
| 19x32x41.5 | 0.054 |
| 20x39.5x41.5 | 0.065 |
| 24x45.5x41.5 | 0.080 |
| 28x38x41.5 | 0.076 |
| 31x46x41.5 | 0.092 |
| 35x50x41.5 | 0.106 |
| 40x55x41.5 | 0.123 |
| 25x45x57 | 0.102 |
| 30x45x57 | 0.113 |
| 35x50x57 | 0.132 |
| 45x55x57 | 0.164 |
| 45x65x57 | 0.184 |

For further details and graphs please refer to Technical Information.

Dissipation factors at $+20^\circ\text{C}$: $\tan \delta \times 10^{-4}$

| PCM | 400 VDC | | 500 VDC | | 600 VDC | | 800 VDC | | 900 VDC | | 1100 VDC | | 1300 VDC | | 1500 VDC | |
|------|---------|--------|---------|--------|---------|--------|---------|--------|---------|--------|----------|--------|----------|--------|----------|--------|
| | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz | 1 kHz | 10 kHz |
| 27.5 | 15 | 160 | 15 | 130 | 12 | 120 | 10 | 90 | 10 | 80 | 10 | 60 | 7 | 50 | 7 | 40 |
| 37.5 | 60 | 350 | 30 | 240 | 21 | 150 | 18 | 170 | 16 | 150 | 14 | 100 | 12 | 90 | 12 | 90 |
| 52.5 | 80 | 550 | 80 | 460 | 40 | 300 | 35 | 250 | 31 | 200 | 30 | 170 | 23 | 150 | 23 | 150 |

Maximum pulse rise time:

| PCM | max. pulse rise time V/ μsec at $T_A < 40^\circ\text{C}$ | | | | | | | |
|------|---|---------|---------|---------|---------|----------|----------|----------|
| | 400 VDC | 500 VDC | 600 VDC | 800 VDC | 900 VDC | 1100 VDC | 1300 VDC | 1500 VDC |
| 27.5 | 11 | 15 | 27 | 29 | 35 | 43 | 50 | 59 |
| 37.5 | 8 | 10 | 19 | 21 | 22 | 29 | 35 | 41 |
| 52.5 | 5 | 7 | 13 | 15 | 18 | 21 | 25 | 29 |



Continuation

General Data

| Capacitance | 400 VDC (70° C) / 300 VDC (85° C) / 220 VDC (105° C) | | | | | | | | Part number |
|-------------|--|------|------|-------|-----|---------------------|-----------------------------------|---------------------|--------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 µF | 9 | 19 | 31.5 | 27.5 | 2 | 11 | 1 | 238.7 | DCP4G041006A |
| 2 " | 9 | 19 | 31.5 | 27.5 | 2 | 22 | 1.5 | 119.4 | DCP4G042006A |
| 3 " | 9 | 19 | 31.5 | 27.5 | 2 | 33 | 1.5 | 79.6 | DCP4G043006A |
| 4 " | 9 | 19 | 31.5 | 27.5 | 2 | 44 | 2 | 59.7 | DCP4G044006A |
| 5 " | 9 | 19 | 31.5 | 27.5 | 2 | 55 | 2 | 47.7 | DCP4G045006A |
| 7 " | 9 | 19 | 31.5 | 27.5 | 2 | 77 | 2.5 | 34.1 | DCP4G047006A |
| 10 µF | 11 | 21 | 31.5 | 27.5 | 2/4 | 110 | 3.5 | 23.9 | DCP4G051006B |
| 15 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 165 | 4.5 | 15.9 | DCP4G051506D |
| 20 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 220 | 5.5 | 11.9 | DCP4G052006F |
| 22 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 242 | 6 | 9.8 | DCP4G052206G |
| 25 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 275 | 7 | 8.6 | DCP4G052506G |
| | 15 | 26 | 41.5 | 37.5 | 2/4 | 200 | 6.5 | 10 | DCP4G052507D |
| 30 " | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 330 | 8 | 7.2 | DCP4G053006I |
| | 17 | 29 | 41.5 | 37.5 | 2/4 | 240 | 7.5 | 8.5 | DCP4G053007E |
| 40 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 440 | 10 | 5.4 | DCP4G054006J |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 320 | 9.5 | 6 | DCP4G054007F |
| 50 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 400 | 11 | 5.4 | DCP4G055007G |
| 60 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 480 | 11.5 | 4.8 | DCP4G056007G |
| 70 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 560 | 13 | 4.7 | DCP4G057007H |
| 80 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 640 | 14 | 4.1 | DCP4G058007H |
| 90 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 720 | 15 | 3.6 | DCP4G059007H |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 720 | 15 | 3.6 | DCP4G059007L |
| 100 µF | 31 | 46 | 41.5 | 37.5 | 2/4 | 800 | 18 | 2.8 | DCP4G061007I |
| 120 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 960 | 20 | 2.3 | DCP4G061207I |
| 140 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 1120 | 22.5 | 2.1 | DCP4G061407J |
| 150 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 1200 | 23 | 2 | DCP4G061507J |
| | 25 | 45 | 57 | 52.5 | 4 | 750 | 20 | 2.6 | DCP4G061509D |
| 160 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1280 | 24.5 | 2 | DCP4G061607K |
| | 25 | 45 | 57 | 52.5 | 4 | 800 | 21 | 2.3 | DCP4G061609D |
| 180 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1440 | 26 | 1.8 | DCP4G061807K |
| | 30 | 45 | 57 | 52.5 | 4 | 900 | 23.5 | 2 | DCP4G061809E |
| 200 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1600 | 27.5 | 1.6 | DCP4G062007K |
| | 30 | 45 | 57 | 52.5 | 4 | 1000 | 25 | 1.8 | DCP4G062009E |
| 220 " | 35 | 50 | 57 | 52.5 | 4 | 1100 | 27 | 1.8 | DCP4G062209F |
| 250 " | 45 | 55 | 57 | 52.5 | 4 | 1250 | 32 | 1.6 | DCP4G062509H |
| 270 " | 45 | 55 | 57 | 52.5 | 4 | 1350 | 33.5 | 1.5 | DCP4G062709H |
| 300 " | 45 | 55 | 57 | 52.5 | 4 | 1500 | 35 | 1.3 | DCP4G063009H |
| 330 " | 45 | 65 | 57 | 52.5 | 4 | 1650 | 37 | 1.2 | DCP4G063309J |
| 350 " | 45 | 65 | 57 | 52.5 | 4 | 1750 | 40 | 1.1 | DCP4G063509J |
| 370 " | 45 | 65 | 57 | 52.5 | 4 | 1850 | 41.5 | 1.1 | DCP4G063709J |
| 400 " | 45 | 65 | 57 | 52.5 | 4 | 2000 | 43 | 1 | DCP4G064009J |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:

Version code: 2-pin = D2
 4-pin = D4
 Tolerance: 20 % = M
 10 % = K
 5 % = J
 Packing: bulk = S
 Pin length: 6-2 = SD
 Taped version see page 161.

Rights reserved to amend design data without prior notification.

Continuation page 135

Continuation

General Data

| Capacitance | 500 VDC (70° C) / 400 VDC (85° C) / 290 VDC (105° C) | | | | | | | | Part number |
|-------------|--|------|------|-------|-----|---------------------|-----------------------------------|---------------------|-------------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 µF | 9 | 19 | 31.5 | 27.5 | 2 | 15 | 1 | 238.7 | DCP4H141006A_____ |
| 2 " | 9 | 19 | 31.5 | 27.5 | 2 | 30 | 1.5 | 119.4 | DCP4H142006A_____ |
| 3 " | 9 | 19 | 31.5 | 27.5 | 2 | 45 | 1.5 | 79.6 | DCP4H143006A_____ |
| 4 " | 9 | 19 | 31.5 | 27.5 | 2 | 60 | 1.8 | 63.7 | DCP4H144006A_____ |
| 5 " | 9 | 19 | 31.5 | 27.5 | 2 | 75 | 2.5 | 47.7 | DCP4H145006A_____ |
| 7 " | 11 | 21 | 31.5 | 27.5 | 2/4 | 105 | 3 | 34.1 | DCP4H147006B_____ |
| 8 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 120 | 3 | 29.8 | DCP4H148006D_____ |
| 10 µF | 13 | 24 | 31.5 | 27.5 | 2/4 | 150 | 4 | 23.9 | DCP4H151006D_____ |
| 12 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 180 | 4 | 19.9 | DCP4H151206F_____ |
| 15 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 225 | 5 | 15.9 | DCP4H151506G_____ |
| | 15 | 26 | 41.5 | 37.5 | 2/4 | 150 | 4.3 | 22.3 | DCP4H151507D_____ |
| 18 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 270 | 6 | 9.5 | DCP4H151806G_____ |
| 20 " | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 300 | 6 | 11.9 | DCP4H152006I_____ |
| | 17 | 29 | 41.5 | 37.5 | 2/4 | 200 | 5.4 | 16.8 | DCP4H152007E_____ |
| 22 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 330 | 7 | 10.9 | DCP4H152206J_____ |
| 25 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 375 | 7.5 | 9.5 | DCP4H152506J_____ |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 250 | 6.3 | 13.4 | DCP4H152507F_____ |
| 30 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 300 | 9 | 7.9 | DCP4H153007G_____ |
| 35 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 350 | 8.5 | 9.1 | DCP4H153507G_____ |
| 40 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 400 | 10 | 5.7 | DCP4H154007G_____ |
| 50 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 500 | 13 | 4.8 | DCP4H155007H_____ |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 500 | 13 | 4.8 | DCP4H155007L_____ |
| 55 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 550 | 14 | 4 | DCP4H155507H_____ |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 550 | 14 | 4 | DCP4H155507L_____ |
| 60 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 600 | 14 | 4.7 | DCP4H156007I_____ |
| 70 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 700 | 16.5 | 3.9 | DCP4H157007I_____ |
| 80 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 800 | 17.5 | 3.4 | DCP4H158007I_____ |
| 90 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 900 | 19 | 3 | DCP4H159007J_____ |
| 100 µF | 35 | 50 | 41.5 | 37.5 | 2/4 | 1000 | 20 | 2.7 | DCP4H161007J_____ |
| | 25 | 45 | 57 | 52.5 | 4 | 700 | 14.3 | 5 | DCP4H161009D_____ |
| 120 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1200 | 22.5 | 2.7 | DCP4H161207K_____ |
| | 30 | 45 | 57 | 52.5 | 4 | 840 | 16.5 | 4.2 | DCP4H161209E_____ |
| 130 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1300 | 23 | 2.4 | DCP4H161307K_____ |
| 140 " | 35 | 50 | 57 | 52.5 | 4 | 980 | 21.5 | 2.8 | DCP4H161409F_____ |
| 150 " | 35 | 50 | 57 | 52.5 | 4 | 1050 | 22.5 | 2.7 | DCP4H161509F_____ |
| 160 " | 45 | 55 | 57 | 52.5 | 4 | 1120 | 25.5 | 2.5 | DCP4H161609H_____ |
| 180 " | 45 | 55 | 57 | 52.5 | 4 | 1260 | 27 | 2.2 | DCP4H161809H_____ |
| 200 " | 45 | 55 | 57 | 52.5 | 4 | 1400 | 28.5 | 2 | DCP4H162009H_____ |
| 210 " | 45 | 55 | 57 | 52.5 | 4 | 1470 | 29.5 | 1.9 | DCP4H162109H_____ |
| 220 " | 45 | 65 | 57 | 52.5 | 4 | 1540 | 32 | 1.8 | DCP4H162209J_____ |
| 240 " | 45 | 65 | 57 | 52.5 | 4 | 1680 | 33.5 | 1.7 | DCP4H162409J_____ |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Rights reserved to amend design data without prior notification.

Part number completion:

Version code: 2-pin = D2
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD

Taped version see page 161.

Continuation page 136

Continuation

General Data

| Capacitance | W | H | L | PCM** | Pin | I_S A | I_{rms}^* (10 kHz)* A | ESR (10 kHz)* mΩ | Part number |
|-------------|----|------|------|-------|-----|------------|----------------------------|---------------------|--------------|
| 1 μF | 9 | 19 | 31.5 | 27.5 | 2 | 27 | 1.5 | 106.9 | DCP4I041006A |
| 2 " | 9 | 19 | 31.5 | 27.5 | 2 | 54 | 2 | 56 | DCP4I042006A |
| 3 " | 9 | 19 | 31.5 | 27.5 | 2 | 81 | 2.5 | 35.6 | DCP4I043006A |
| 4 " | 11 | 21 | 31.5 | 27.5 | 2/4 | 108 | 3 | 26.7 | DCP4I044006B |
| 5 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 135 | 3.5 | 22 | DCP4I045006D |
| 7 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 189 | 4.5 | 16 | DCP4I047006F |
| 8 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 216 | 5 | 13.4 | DCP4I048006F |
| 10 μF | 17 | 29 | 31.5 | 27.5 | 2/4 | 270 | 6 | 11 | DCP4I051006G |
| | 13 | 24 | 41.5 | 37.5 | 2/4 | 190 | 5 | 17.6 | DCP4I051007C |
| 12 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 324 | 6.5 | 8.9 | DCP4I051206G |
| 15 " | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 405 | 8 | 7 | DCP4I051506I |
| | 17 | 29 | 41.5 | 37.5 | 2/4 | 285 | 6.5 | 11.8 | DCP4I051507E |
| 18 " | 20 | 39.5 | 31.5 | 27.5 | 2/2 | 486 | 9.5 | 5.9 | DCP4I051806J |
| 20 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 540 | 10 | 5.3 | DCP4I052006J |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 380 | 10.5 | 4.9 | DCP4I052007F |
| 22 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 418 | 11 | 5.4 | DCP4I052207G |
| 25 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 475 | 11.5 | 5 | DCP4I052507G |
| 30 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 570 | 14 | 4.1 | DCP4I053007H |
| 35 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 665 | 14.5 | 3.8 | DCP4I053507H |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 665 | 14.5 | 3.8 | DCP4I053507L |
| 40 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 760 | 16.5 | 3.3 | DCP4I054007I |
| 45 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 855 | 17 | 3.2 | DCP4I054507I |
| 50 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 950 | 19 | 2.9 | DCP4I055007J |
| 60 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 1140 | 17.5 | 3.4 | DCP4I056007J |
| | 25 | 45 | 57 | 52.5 | 2/4 | 780 | 14.5 | 4.9 | DCP4I056009D |
| 70 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1330 | 20 | 3.1 | DCP4I057007K |
| | 30 | 45 | 57 | 52.5 | 4 | 910 | 16.5 | 4.2 | DCP4I057009E |
| 80 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1520 | 22 | 2.6 | DCP4I058007K |
| | 30 | 45 | 57 | 52.5 | 4 | 1040 | 17.8 | 3.6 | DCP4I058009E |
| 90 " | 35 | 50 | 57 | 52.5 | 4 | 1170 | 23.5 | 1.9 | DCP4I059009F |
| 100 μF | 45 | 55 | 57 | 52.5 | 4 | 1300 | 25 | 2.6 | DCP4I061009H |
| 120 " | 45 | 65 | 57 | 52.5 | 4 | 1560 | 28 | 2.3 | DCP4I061209J |
| 140 " | 45 | 65 | 57 | 52.5 | 4 | 1820 | 31 | 1.9 | DCP4I061409J |
| 150 " | 45 | 65 | 57 | 52.5 | 4 | 1950 | 33 | 1.7 | DCP4I061509J |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:


Version code: 2-pin = D2
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 161.

2-pin version



| PCM | d |
|------|-----|
| 27.5 | 0.8 |
| 37.5 | 1 |

4-pin version

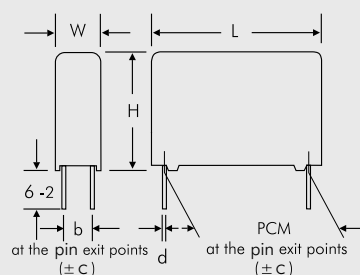

| W | PCM | b | d | c |
|----|------|------|-----|-----|
| 11 | 27.5 | 5 | 0.8 | 0.4 |
| 13 | 27.5 | 7.5 | 0.8 | 0.4 |
| 15 | 27.5 | 7.5 | 0.8 | 0.4 |
| 17 | 27.5 | 10 | 0.8 | 0.4 |
| 20 | 27.5 | 12.5 | 0.8 | 0.4 |
| 19 | 37.5 | 10 | 1 | 0.4 |
| 20 | 37.5 | 12.5 | 1 | 0.4 |
| 24 | 37.5 | 12.5 | 1 | 0.4 |
| 28 | 37.5 | 10 | 1 | 0.4 |
| 31 | 37.5 | 20 | 1 | 0.4 |
| 35 | 37.5 | 20 | 1 | 0.4 |
| 40 | 37.5 | 20 | 1 | 0.4 |
| 25 | 52.5 | 20 | 1.2 | 0.8 |
| 30 | 52.5 | 20 | 1.2 | 0.8 |
| 35 | 52.5 | 20 | 1.2 | 0.8 |
| 45 | 52.5 | 20 | 1.2 | 0.8 |

Rights reserved to amend design data without prior notification.

Continuation

General Data

| Capacitance | 800 VDC (70° C) / 700 VDC (85° C) / 510 VDC (105° C) | | | | | | | | Part number |
|-------------|--|------|------|-------|-----|---------------------|-----------------------------------|---------------------|--------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 μF | 9 | 19 | 31.5 | 27.5 | 2 | 29 | 1.7 | 73.2 | DCP4L041006A |
| 2 " | 9 | 19 | 31.5 | 27.5 | 2 | 58 | 2.5 | 36.6 | DCP4L042006A |
| 3 " | 11 | 21 | 31.5 | 27.5 | 2/4 | 87 | 3 | 24.4 | DCP4L043006B |
| 4 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 116 | 4 | 18.3 | DCP4L044006D |
| 5 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 145 | 4.5 | 14.6 | DCP4L045006D |
| 7 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 203 | 6 | 10.5 | DCP4L047006G |
| 8 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 232 | 6.5 | 9.2 | DCP4L048006G |
| 10 μF | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 290 | 8 | 7.3 | DCP4L051006I |
| | 17 | 29 | 41.5 | 37.5 | 2/4 | 210 | 7.5 | 8.5 | DCP4L051007E |
| 12 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 348 | 9.5 | 6.1 | DCP4L051206J |
| 15 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 435 | 10.5 | 4.9 | DCP4L051506J |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 315 | 8.5 | 7.5 | DCP4L051507F |
| 18 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 378 | 9.5 | 7.2 | DCP4L051807G |
| 20 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 420 | 10 | 6.2 | DCP4L052007G |
| 22 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 462 | 10.5 | 5.9 | DCP4L052207G |
| 25 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 525 | 12.5 | 5 | DCP4L052507H |
| 30 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 630 | 14 | 4.1 | DCP4L053007H |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 630 | 14 | 4.1 | DCP4L053007L |
| 35 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 735 | 15.5 | 3.8 | DCP4L053507I |
| 40 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 840 | 16.5 | 3.3 | DCP4L054007I |
| 45 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 945 | 17.5 | 3.4 | DCP4L054507J |
| 50 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 1050 | 19 | 3 | DCP4L055007J |
| | 25 | 45 | 57 | 52.5 | 4 | 750 | 18.5 | 3 | DCP4L055009D |
| 60 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 1260 | 21.5 | 2.7 | DCP4L056007K |
| | 30 | 45 | 57 | 52.5 | 4 | 900 | 20.5 | 2.7 | DCP4L056009E |
| 65 " | 35 | 50 | 57 | 52.5 | 4 | 975 | 22.5 | 2.2 | DCP4L056509F |
| 70 " | 45 | 55 | 57 | 52.5 | 4 | 1050 | 23.5 | 3 | DCP4L057009H |
| 75 " | 45 | 55 | 57 | 52.5 | 4 | 1125 | 24 | 2.9 | DCP4L057509H |
| 80 " | 45 | 55 | 57 | 52.5 | 4 | 1200 | 24.5 | 3 | DCP4L058009H |
| 90 " | 45 | 65 | 57 | 52.5 | 4 | 1350 | 25.5 | 2.5 | DCP4L059009J |
| 100 μF | 45 | 65 | 57 | 52.5 | 4 | 1500 | 26.5 | 2.3 | DCP4L061009J |
| 115 " | 45 | 65 | 57 | 52.5 | 4 | 1725 | 28 | 2.1 | DCP4L061159J |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

* Permissible I_{rms} at 10° C internal temperature rise (general guide)


** PCM = Printed circuit module = pin spacing

Dims. in mm.

Part number completion:


Version code: 2-pin = D2
4-pin = D4
Tolerance: 20 % = M
10 % = K
5 % = J
Packing: bulk = S
Pin length: 6-2 = SD
Taped version see page 161.

2-pin version

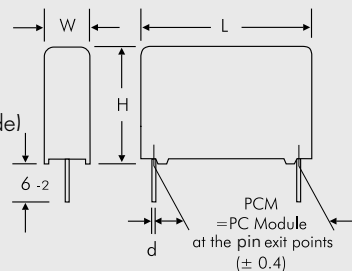

| PCM | d |
|------|-----|
| 27.5 | 0.8 |
| 37.5 | 1 |

4-pin version

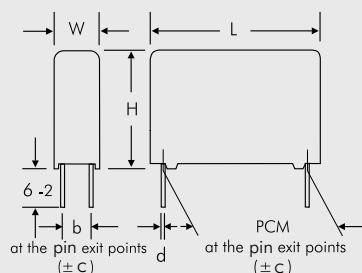

| W | PCM | b | d | c |
|----|------|------|-----|-----|
| 11 | 27.5 | 5 | 0.8 | 0.4 |
| 13 | 27.5 | 7.5 | 0.8 | 0.4 |
| 15 | 27.5 | 7.5 | 0.8 | 0.4 |
| 17 | 27.5 | 10 | 0.8 | 0.4 |
| 20 | 27.5 | 12.5 | 0.8 | 0.4 |
| 19 | 37.5 | 10 | 1 | 0.4 |
| 20 | 37.5 | 12.5 | 1 | 0.4 |
| 24 | 37.5 | 12.5 | 1 | 0.4 |
| 28 | 37.5 | 10 | 1 | 0.4 |
| 31 | 37.5 | 20 | 1 | 0.4 |
| 35 | 37.5 | 20 | 1 | 0.4 |
| 40 | 37.5 | 20 | 1 | 0.4 |
| 25 | 52.5 | 20 | 1.2 | 0.8 |
| 30 | 52.5 | 20 | 1.2 | 0.8 |
| 35 | 52.5 | 20 | 1.2 | 0.8 |
| 45 | 52.5 | 20 | 1.2 | 0.8 |

Rights reserved to amend design data without prior notification..

Continuation

General Data

| Capacitance | 900 VDC (70° C) / 760 VDC (85° C) / 550 VDC (105° C) | | | | | | | | Part number |
|-------------|--|------|------|-------|-----|---------------------|-----------------------------------|---------------------|-------------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 µF | 9 | 19 | 31.5 | 27.5 | 2 | 35 | 2 | 66.1 | DCP4N041006A_____ |
| 2 „ | 11 | 21 | 31.5 | 27.5 | 2/4 | 70 | 2.5 | 44 | DCP4N042006B_____ |
| 3 „ | 13 | 24 | 31.5 | 27.5 | 2/4 | 105 | 4 | 22 | DCP4N043006D_____ |
| 4 „ | 13 | 24 | 31.5 | 27.5 | 2/4 | 140 | 4.5 | 16.5 | DCP4N044006D_____ |
| 5 „ | 17 | 29 | 31.5 | 27.5 | 2/4 | 175 | 4.5 | 18 | DCP4N045006G_____ |
| 7 „ | 17 | 29 | 31.5 | 27.5 | 2/4 | 245 | 6.5 | 9.4 | DCP4N047006G_____ |
| 8 „ | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 280 | 7.5 | 8.3 | DCP4N048006I_____ |
| 10 µF | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 350 | 10 | 5.3 | DCP4N051006J_____ |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 220 | 9 | 6.7 | DCP4N051007F_____ |
| 15 „ | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 330 | 10.5 | 5.8 | DCP4N051507G_____ |
| 20 „ | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 440 | 13 | 4.8 | DCP4N052007H_____ |
| 22 „ | 28 | 38 | 41.5 | 37.5 | 2/4 | 440 | 13 | 4.8 | DCP4N052007L_____ |
| | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 484 | 14 | 4.1 | DCP4N052207H_____ |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 484 | 14 | 4.1 | DCP4N052207L_____ |
| 25 „ | 31 | 46 | 41.5 | 37.5 | 2/4 | 550 | 15.5 | 3.8 | DCP4N052507I_____ |
| 30 „ | 31 | 46 | 41.5 | 37.5 | 2/4 | 660 | 16.5 | 3.4 | DCP4N053007I_____ |
| | 25 | 45 | 57 | 52.5 | 4 | 540 | 15 | 4.5 | DCP4N053009D_____ |
| 35 „ | 35 | 50 | 41.5 | 37.5 | 2/4 | 770 | 18 | 3.2 | DCP4N053507J_____ |
| | 25 | 45 | 57 | 52.5 | 4 | 630 | 16 | 4 | DCP4N053509D_____ |
| 40 „ | 40 | 55 | 41.5 | 37.5 | 2/4 | 880 | 19.5 | 3.2 | DCP4N054007K_____ |
| | 30 | 45 | 57 | 52.5 | 4 | 720 | 18 | 3.5 | DCP4N054009E_____ |
| 50 „ | 35 | 50 | 57 | 52.5 | 4 | 900 | 22 | 3.3 | DCP4N055009F_____ |
| 60 „ | 45 | 55 | 57 | 52.5 | 4 | 1080 | 23 | 3 | DCP4N056009H_____ |
| 70 „ | 45 | 65 | 57 | 52.5 | 4 | 1260 | 24.5 | 3.3 | DCP4N057009J_____ |
| 80 „ | 45 | 65 | 57 | 52.5 | 4 | 1440 | 25.5 | 2.8 | DCP4N058009J_____ |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.

| Part number completion: | | |
|-----------------------------|-------|------|
| Version code: | 2-pin | = D2 |
| | 4-pin | = D4 |
| Tolerance: | 20 % | = M |
| | 10 % | = K |
| | 5 % | = J |
| Packing: | bulk | = S |
| Pin length: | 6-2 | = SD |
| Taped version see page 161. | | |

Rights reserved to amend design data without prior notification.

Continuation page 139

Continuation

General Data

| Capacitance | 1100 VDC (70° C) / 920 VDC (85° C) / 670 VDC (105° C) | | | | | | | | Part number |
|-------------|---|------|------|-------|-----|---------------------|-----------------------------------|---------------------|--------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 µF | 9 | 19 | 31.5 | 27.5 | 2 | 43 | 2 | 86 | DCP4P041006A |
| 2 " | 13 | 24 | 31.5 | 27.5 | 2/4 | 86 | 4 | 19 | DCP4P042006D |
| 3 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 129 | 5 | 13.6 | DCP4P043006F |
| 4 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 172 | 6 | 10.8 | DCP4P044006G |
| 5 " | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 215 | 7.5 | 7.8 | DCP4P045006I |
| 7 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 301 | 9 | 6.5 | DCP4P047006J |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 203 | 7.5 | 10 | DCP4P047007F |
| 8 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 232 | 8 | 10 | DCP4P048007G |
| 10 µF | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 290 | 9.5 | 7.2 | DCP4P051007G |
| 12 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 348 | 11 | 6.6 | DCP4P051207H |
| 15 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 435 | 12 | 5.6 | DCP4P051507H |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 435 | 12 | 5.6 | DCP4P051507L |
| 18 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 522 | 13.5 | 5 | DCP4P051807I |
| 20 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 580 | 15 | 4.7 | DCP4P052007J |
| | 25 | 45 | 57 | 52.5 | 4 | 420 | 14.5 | 4.9 | DCP4P052009D |
| 22 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 638 | 15.5 | 4.4 | DCP4P052207J |
| | 25 | 45 | 57 | 52.5 | 4 | 462 | 15 | 4.5 | DCP4P052209D |
| 25 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 725 | 16.5 | 4.6 | DCP4P052507K |
| | 30 | 45 | 57 | 52.5 | 4 | 525 | 16 | 4.4 | DCP4P052509E |
| 30 " | 35 | 50 | 57 | 52.5 | 4 | 630 | 17.5 | 4.4 | DCP4P053009F |
| 35 " | 35 | 50 | 57 | 52.5 | 4 | 735 | 18 | 4 | DCP4P053509F |
| 40 " | 35 | 50 | 57 | 52.5 | 4 | 840 | 18 | 4.3 | DCP4P054009F |
| 45 " | 45 | 55 | 57 | 52.5 | 4 | 945 | 20 | 4.1 | DCP4P054509H |
| 50 " | 45 | 65 | 57 | 52.5 | 4 | 1050 | 21 | 4.1 | DCP4P055009J |
| 60 " | 45 | 65 | 57 | 52.5 | 4 | 1260 | 23 | 3.5 | DCP4P056009J |

| Capacitance | 1300 VDC (70° C) / 1100 VDC (85° C) / 800 VDC (105° C) | | | | | | | | Part number |
|-------------|--|------|------|-------|-----|---------------------|-----------------------------------|---------------------|--------------|
| | W | H | L | PCM** | Pin | I _S A | I _{rms} * (10 kHz)* A | ESR (10 kHz)* mΩ | |
| 1 µF | 11 | 21 | 31.5 | 27.5 | 2/4 | 50 | 2.5 | 40 | DCP4R241006B |
| 2 " | 15 | 26 | 31.5 | 27.5 | 2/4 | 100 | 4.5 | 16.8 | DCP4R242006F |
| 3 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 150 | 6 | 10.8 | DCP4R243006G |
| 4 " | 17 | 34.5 | 31.5 | 27.5 | 2/4 | 200 | 6.5 | 10.4 | DCP4R244006I |
| 5 " | 20 | 39.5 | 31.5 | 27.5 | 2/4 | 250 | 7.5 | 9.4 | DCP4R245006J |
| | 19 | 32 | 41.5 | 37.5 | 2/4 | 175 | 7 | 11 | DCP4R245007F |
| 7 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 245 | 8 | 10 | DCP4R247007G |
| 8 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 280 | 9 | 9.9 | DCP4R248007H |
| 10 µF | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 350 | 10.5 | 7.2 | DCP4R251007H |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 350 | 10.5 | 7.2 | DCP4R251007L |
| 15 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 525 | 14 | 4.8 | DCP4R251507I |
| | 25 | 45 | 57 | 52.5 | 4 | 375 | 13 | 6 | DCP4R251509D |
| 18 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 630 | 15.5 | 4.4 | DCP4R251807J |
| | 25 | 45 | 57 | 52.5 | 4 | 450 | 14.5 | 4.9 | DCP4R251809D |
| 20 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 700 | 17.5 | 4 | DCP4R252007K |
| | 30 | 45 | 57 | 52.5 | 4 | 500 | 16 | 4.4 | DCP4R252009E |
| 22 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 770 | 18 | 3.8 | DCP4R252207K |
| | 35 | 50 | 57 | 52.5 | 4 | 550 | 17.5 | 4.3 | DCP4R252209F |
| 25 " | 35 | 50 | 57 | 52.5 | 4 | 625 | 19 | 3.6 | DCP4R252509F |
| 30 " | 45 | 55 | 57 | 52.5 | 4 | 750 | 20 | 4 | DCP4R253009H |
| 35 " | 45 | 65 | 57 | 52.5 | 4 | 875 | 21 | 4.1 | DCP4R253509J |
| 40 " | 45 | 65 | 57 | 52.5 | 4 | 1000 | 22 | 3.7 | DCP4R254009J |

* General guide

New values and box sizes. The box sizes according to main catalogue 2019 are still available on request.

** PCM = Printed circuit module = pin spacing

* Permissible I_{rms} at 10° C internal temperature rise (general guide)

Dims. in mm.

Rights reserved to amend design data without prior notification.

Continuation

General Data

| Capacitance | W | H | L | PCM** | Pin | I_S A | I_{rms} *(10 kHz)* A | ESR (10 kHz)* mΩ | Part number |
|-------------|----|------|------|-------|-----|------------|---------------------------|---------------------|-------------------|
| 1 μF | 13 | 24 | 31.5 | 27.5 | 2/4 | 59 | 3 | 33.3 | DCP4S041006D_____ |
| 2 " | 17 | 29 | 31.5 | 27.5 | 2/4 | 118 | 5 | 15.6 | DCP4S042006G_____ |
| 3 " | 19 | 32 | 41.5 | 37.5 | 2/4 | 123 | 6 | 15 | DCP4S043007F_____ |
| 4 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 164 | 7 | 13.3 | DCP4S044007G_____ |
| 5 " | 20 | 39.5 | 41.5 | 37.5 | 2/4 | 205 | 8 | 10.2 | DCP4S045007G_____ |
| 7 " | 24 | 45.5 | 41.5 | 37.5 | 2/4 | 287 | 9.5 | 8.9 | DCP4S047007H_____ |
| | 28 | 38 | 41.5 | 37.5 | 2/4 | 287 | 9.5 | 8.4 | DCP4S047007L_____ |
| 8 " | 31 | 46 | 41.5 | 37.5 | 2/4 | 328 | 11 | 7.6 | DCP4S048007I_____ |
| 10 μF | 31 | 46 | 41.5 | 37.5 | 2/4 | 410 | 12.5 | 5.9 | DCP4S051007I_____ |
| 12 " | 35 | 50 | 41.5 | 37.5 | 2/4 | 492 | 14.5 | 5 | DCP4S051207J_____ |
| | 25 | 45 | 57 | 52.5 | 4 | 348 | 14 | 5.2 | DCP4S051209D_____ |
| 15 " | 40 | 55 | 41.5 | 37.5 | 2/4 | 615 | 17 | 4.3 | DCP4S051507K_____ |
| | 30 | 45 | 57 | 52.5 | 4 | 435 | 16 | 4.4 | DCP4S051509E_____ |
| 18 " | 35 | 50 | 57 | 52.5 | 4 | 522 | 17.5 | 4.3 | DCP4S051809F_____ |
| 20 " | 35 | 50 | 57 | 52.5 | 4 | 580 | 18 | 4.1 | DCP4S052009F_____ |
| 22 " | 45 | 55 | 57 | 52.5 | 4 | 638 | 20 | 4.1 | DCP4S052209H_____ |
| 25 " | 45 | 55 | 57 | 52.5 | 4 | 725 | 20.5 | 3.9 | DCP4S052509H_____ |
| 30 " | 45 | 65 | 57 | 52.5 | 4 | 870 | 21.5 | 4 | DCP4S053009J_____ |

* General guide

New range


* Permissible I_{rms} at 10° C internal temperature rise (general guide)

** PCM = Printed circuit module = pin spacing

Dims. in mm.


| Part number completion: | | |
|-----------------------------|-------|------|
| Version code: | 2-pin | = D2 |
| | 4-pin | = D4 |
| Tolerance: | 20 % | = M |
| | 10 % | = K |
| | 5 % | = J |
| Packing: | bulk | = S |
| Pin length: | 6-2 | = SD |
| Taped version see page 161. | | |

2-pin version

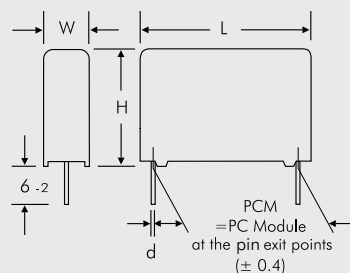


| PCM | d |
|------|-----|
| 27.5 | 0.8 |
| 37.5 | 1 |

4-pin version

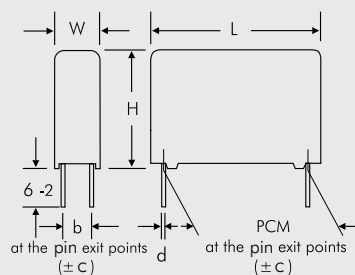

| W | PCM | b | d | c |
|----|------|------|-----|-----|
| 11 | 27.5 | 5 | 0.8 | 0.4 |
| 13 | 27.5 | 7.5 | 0.8 | 0.4 |
| 15 | 27.5 | 7.5 | 0.8 | 0.4 |
| 17 | 27.5 | 10 | 0.8 | 0.4 |
| 20 | 27.5 | 12.5 | 0.8 | 0.4 |
| 19 | 37.5 | 10 | 1 | 0.4 |
| 20 | 37.5 | 12.5 | 1 | 0.4 |
| 24 | 37.5 | 12.5 | 1 | 0.4 |
| 28 | 37.5 | 10 | 1 | 0.4 |
| 31 | 37.5 | 20 | 1 | 0.4 |
| 35 | 37.5 | 20 | 1 | 0.4 |
| 40 | 37.5 | 20 | 1 | 0.4 |
| 25 | 52.5 | 20 | 1.2 | 0.8 |
| 30 | 52.5 | 20 | 1.2 | 0.8 |
| 35 | 52.5 | 20 | 1.2 | 0.8 |
| 45 | 52.5 | 20 | 1.2 | 0.8 |

Plate versions page 144

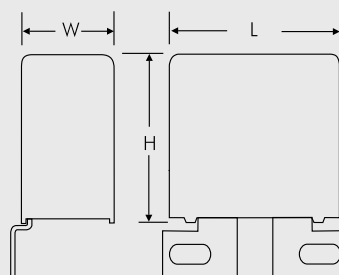

Example

Rights reserved to amend design data without prior notification.

Continuation page 141

Continuation

500 VDC

Impedance change with frequency
(general guide)



Permissible AC current in relation to
frequency at $\leq 20^\circ\text{C}$ internal temperature
rise (general guide)



600 VDC

Impedance change with frequency
(general guide)






Permissible AC current in relation to
frequency at $\leq 20^\circ\text{C}$ internal temperature
rise (general guide)



Continuation

800 VDC

Impedance change with frequency (general guide)

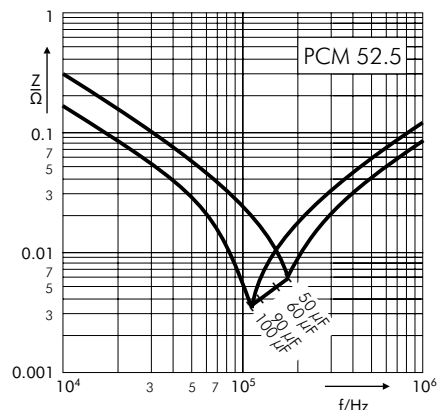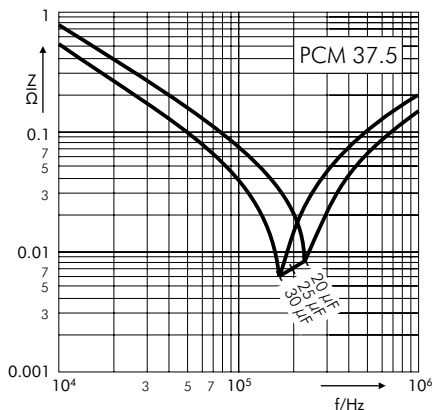
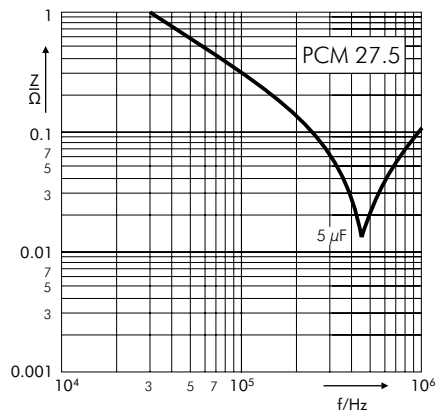


Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)



900 VDC

Impedance change with frequency (general guide)

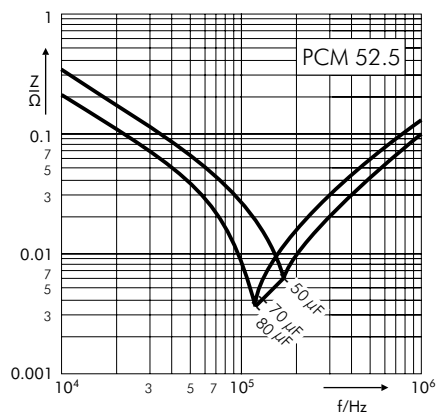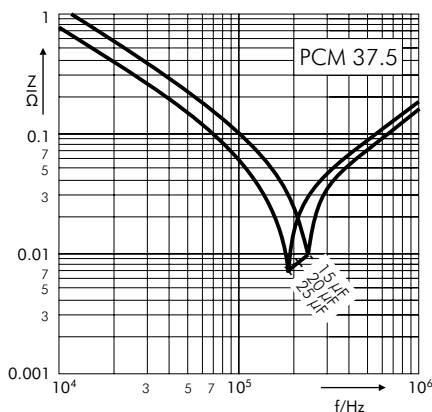

Permissible AC current in relation to frequency at $\leq 20^\circ \text{C}$ internal temperature rise (general guide)



Continuation

1100 VDC

Impedance change with frequency (general guide)



Permissible AC current in relation to frequency at $\leq 20^\circ\text{C}$ internal temperature rise (general guide)



1300 VDC

Impedance change with frequency (general guide)




Permissible AC current in relation to frequency at $\leq 20^\circ\text{C}$ internal temperature rise (general guide)




Continuation


Plate versions

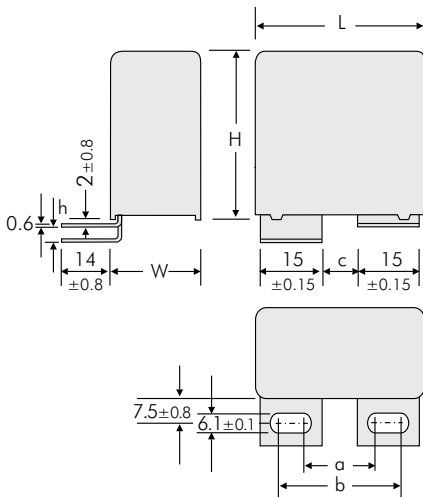


| Version | L | a ±0.5 | b ±0.5 | c ±0.5 | h ±0.8 |
|-------------|------|-----------|-----------|-----------|-----------|
| A1 | 41.5 | 17.5 | 28 | 7.5 | 0 |
| A1.5 | 41.5 | 17.5 | 28 | 7.5 | 3.5 |

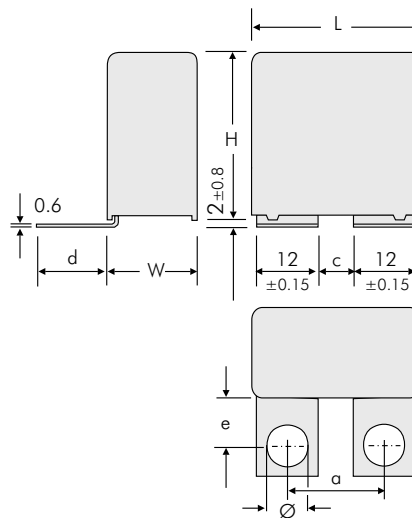


| Version | L | a ±0.5 | c ±0.5 | d ±0.8 | e ±0.8 | Ø ±0.1 |
|---------------|------|-----------|-----------|-----------|-----------|-----------|
| A1.6 | 41.5 | 18 | 6 | 21.5 | 16 | 7 |
| A1.6.1 | 41.5 | 22 | 10 | 18.5 | 13 | 7 |
| A1.6.2 | 41.5 | 23 | 10 | 18.5 | 13 | 8 |

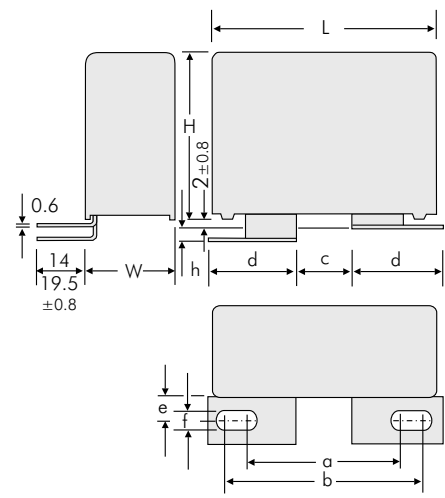


| Version | L | a ±0.5 | b ±0.5 | c ±0.5 | d ±0.15 | e ±0.8 | f ±0.1 | h ±0.8 |
|---------------|------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
| A2 | 41.5 | 36 | 46.5 | 14.5 | 22 | 7.5 | 8.4 | 0 |
| A2.4.1 | 41.5 | 33.5 | 39.5 | 7.5 | 22 | 13 | 8.4 | 0 |
| A2.6.1 | 41.5 | 31.5 | 41.5 | 14 | 22 | 13 | 6.1 | 3.5 |
| A2.6.2 | 41.5 | 31.5 | 41.5 | 14 | 22 | 13 | 6.1 | 0 |
| A2.8 | 41.5 | 36 | 46.5 | 14.5 | 22 | 7.5 | 8.4 | 3.5 |

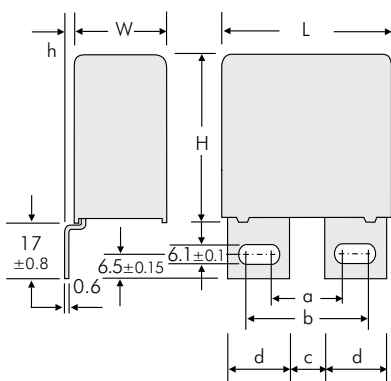

| Version | L | a ±0.5 | b ±0.5 | c ±0.5 | d ±0.15 | h ±0.8 |
|--------------|------|-----------|-----------|-----------|------------|-----------|
| A3 | 41.5 | 17.5 | 27.5 | 7.5 | 15 | 0 |
| A3.5 | 41.5 | 17.5 | 27.5 | 7.5 | 15 | 3 |
| A3.12 | 41.5 | 17.5 | 30 | 7.5 | 16.5 | 0 |

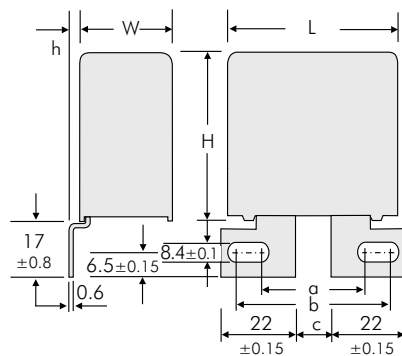

| Version | L | a ±0.5 | b ±0.5 | c ±0.5 | h ±0.8 |
|--------------|------|-----------|-----------|-----------|-----------|
| A3.9 | 41.5 | 40.5 | 46.5 | 14.5 | 0 |
| A3.11 | 41.5 | 40.5 | 46.5 | 14.5 | 3 |

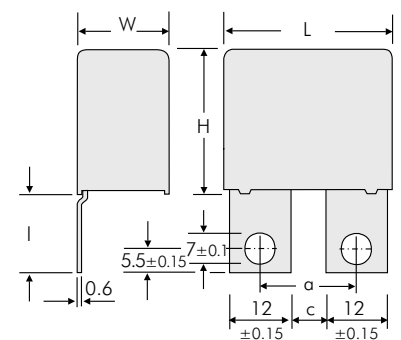

| Version | L | a ±0.5 | c ±0.5 | l ±0.8 |
|---------------|-------------|-----------|-----------|-----------|
| A3.8 | 41.5 W ≥ 17 | 18 | 6 | 23 |
| A3.8.1 | 41.5 W ≥ 17 | 22 | 10 | 17.5 |
| A3.8.2 | 41.5 W ≥ 17 | 22 | 10 | 23 |

Continuation

Plate versions



| Version | L | a ±0.8 | b ±0.8 | f ±0.8 | d ±0.1 |
|--------------|-------------|-----------|-----------|-----------|-----------|
| A4.9 | 31.5 W ≥ 15 | 44 | 47 | 57 | 4.5 |
| A4.10 | 31.5 W ≥ 15 | 43 | 59 | 69 | 6.1 |
| A4.2 | 41.5 W ≥ 15 | 54 | 57 | 67 | 4.5 |
| A4 | 41.5 W ≥ 15 | 53 | 69 | 79 | 6.1 |

Version B



Dims. in mm

| L | PCM | b ±0.15 |
|------|------|------------|
| 31.5 | 28.5 | 8 |
| 41.5 | 38.5 | 8 |

Additional special versions can be realized. Please contact us with your specific needs.

Possible connecting respective plate versions - depending on box size

| Version code | | D2 | D4 | B8 | 1A | 1H | 1I | 1J | 1S | 2A | 2F | 2J | 2K | 2M | 3A | 3G | 3K | 3L | 3M | 3N | 3P | 3Q | 4A | 4C | 4L | 4M |
|------------------|-----------|-------|-------|----|----|------|------|--------|--------|----|--------|--------|--------|------|----|------|------|--------|--------|------|-------|-------|----|------|------|-------|
| W x H x L | Size Code | 2-pin | 4-pin | B8 | A1 | A1.5 | A1.6 | A1.6.1 | A1.6.2 | A2 | A2.4.1 | A2.6.1 | A2.6.2 | A2.8 | A3 | A3.5 | A3.8 | A3.8.1 | A3.8.2 | A3.9 | A3.11 | A3.12 | A4 | A4.2 | A4.9 | A4.10 |
| 9 x 19 x 31.5 | 6A | | | | | | | | | | | | | | | | | | | | | | | | | |
| 11 x 21 x 31.5 | 6B | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 x 24 x 31.5 | 6D | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 x 26 x 31.5 | 6F | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 x 29 x 31.5 | 6G | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 x 34.5 x 31.5 | 6I | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 x 39.5 x 31.5 | 6J | | | | | | | | | | | | | | | | | | | | | | | | | |
| 13 x 24 x 41.5 | 7C | | | | | | | | | | | | | | | | | | | | | | | | | |
| 15 x 26 x 41.5 | 7D | | | | | | | | | | | | | | | | | | | | | | | | | |
| 17 x 29 x 41.5 | 7E | | | | | | | | | | | | | | | | | | | | | | | | | |
| 19 x 32 x 41.5 | 7F | | | | | | | | | | | | | | | | | | | | | | | | | |
| 20 x 39.5 x 41.5 | 7G | | | | | | | | | | | | | | | | | | | | | | | | | |
| 24 x 45.5 x 41.5 | 7H | | | | | | | | | | | | | | | | | | | | | | | | | |
| 28 x 38 x 41.5 | 7L | | | | | | | | | | | | | | | | | | | | | | | | | |
| 31 x 46 x 41.5 | 7I | | | | | | | | | | | | | | | | | | | | | | | | | |
| 35 x 50 x 41.5 | 7J | | | | | | | | | | | | | | | | | | | | | | | | | |
| 40 x 55 x 41.5 | 7K | | | | | | | | | | | | | | | | | | | | | | | | | |

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{\max.} \leq 125^{\circ}\text{C}$
soldering: $T_{\max.} \leq 135^{\circ}\text{C}$

Polypropylene: preheating: $T_{\max.} \leq 100^{\circ}\text{C}$
soldering: $T_{\max.} \leq 110^{\circ}\text{C}$

Single wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $t < 5\text{ sec}$

Double wave soldering

Soldering bath temperature: $T < 260^{\circ}\text{C}$

Dwell time: $\Sigma t < 5\text{ sec}$

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.



WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories by the ifaz (Institut für Auditierung und Zertifizierung) certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- incoming material inspection
- metallization
- film inspection
- schoopage
- pre-healing
- pin attachment
- cast resin preparation/encapsulation
- 100% final inspection
- Testing as per customer requirements

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- Lead
- PCB
- CFC
- Hydrocarbon chloride
- Chromium 6+
- PBB/PBDE
- Arsenic
- Cadmium
- Mercury
- etc.

We merely use pure, recyclable materials for packing our components, such as:

- carton
- cardboard
- adhesive tape made of paper
- polystyrene

We almost completely refrain from using packing materials such as:

- adhesive tapes made of plastic
- metal clips

RoHS Compliance

According to the RoHS Directive 2011/65/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has refrained from using such substances since years already.



WIMA Kondensatoren sind bleifrei konform RoHS 2011/65/EU

WIMA capacitors are lead free in accordance with RoHS 2011/65/EU

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

Typical Dimensions for Taping Configuration



Diagram 1:
PCM 2.5/5/7.5mm

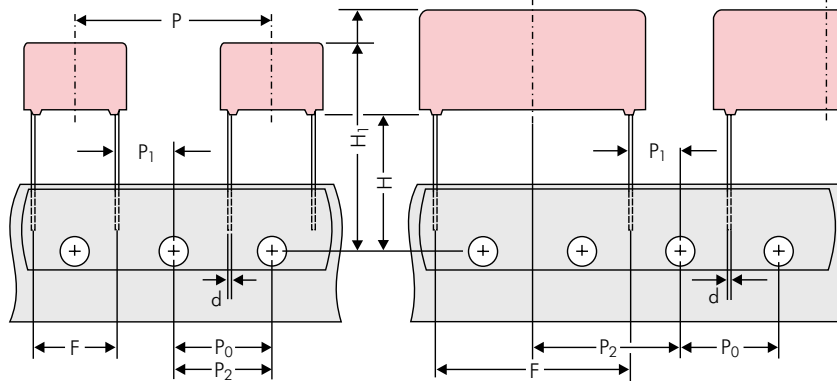


Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm

*PCM 27.5 taping possible with two feed holes between components

| Designation | Symbol | Dimensions for Radial Taping | | | | | | |
|--|----------------|--|--|---|---|---|---|---|
| | | PCM 2.5 taping | PCM 5 taping | PCM 7.5 taping | PCM 10 taping* | PCM 15 taping* | PCM 22.5 taping | PCM 27.5 taping |
| Carrier tape width | W | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 | 18.0 ±0.5 |
| Hold-down tape width | W ₀ | 6.0 for hot-sealing adhesive tape | 6.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape | 12.0 for hot-sealing adhesive tape |
| Hole position | W ₁ | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 | 9.0 ±0.5 |
| Hold-down tape position | W ₂ | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. | 0.5 to 3.0 max. |
| Feed hole diameter | D ₀ | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 | 4.0 ±0.2 |
| Pitch of component | P | 12.7 ±1.0 | 12.7 ±1.0 | 12.7 ±1.0 | 25.4 ±1.0 | 25.4 ±1.0 | 38.1 ±1.5 | 38.1 ±1.5 or 50.8 ±1.5 |
| Feed hole pitch | P ₀ | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch | 12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch |
| Feed hole centre to pin | P ₁ | 5.1 ±0.5 | 3.85 ±0.7 | 2.6 ±0.7 | 7.7 ±0.7 | 5.2 ±0.7 | 7.8 ±0.7 | 5.3 ±0.7 |
| Hole centre to component centre | P ₂ | 6.35 ±1.3 | 6.35 ±1.3 | 6.35 ±1.3 | 12.7 ±1.3 | 12.7 ±1.3 | 19.05 ±1.3 | 19.05 ±1.3 |
| Feed hole centre to bottom edge of the component | H | 16.5 ±0.3 18.5 ±0.5 | 16.5 ±0.3 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 | 16.5 ±0.5 18.5 ±0.5 |
| Feed hole centre to top edge of the component | H ₁ | H+H _{component} < H ₁ 32.25 max. | H+H _{component} < H ₁ 32.25 max. | H+H _{component} < H ₁ 24.5 to 31.5 | H+H _{component} < H ₁ 25.0 to 31.5 | H+H _{component} < H ₁ 26.0 to 37.0 | H+H _{component} < H ₁ 30.0 to 43.0 | H+H _{component} < H ₁ 35.0 to 45.0 |
| Pin spacing at upper edge of carrier tape | F | 2.5 ±0.5 | 5.0 ^{+0.8} _{-0.2} | 7.5 ±0.8 | 10.0 ±0.8 | 15 ±0.8 | 22.5 ±0.8 | 27.5 ±0.8 |
| Pin diameter | d | 0.4 ±0.05 | 0.5 ±0.05 | 0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05} | 0.5 ±0.05 or 0.6 ^{+0.06} _{-0.05} | 0.8 ^{+0.08} _{-0.05} | 0.8 ^{+0.08} _{-0.05} | 0.8 ^{+0.08} _{-0.05} |
| Component alignment | Δh | ± 2.0 max. | ± 2.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. | ± 3.0 max. |
| Total tape thickness | t | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 | 0.6 ±0.2 |
| Package (see also page 162) | | ROLL/AMMO | | | AMMO | | | |
| | | REEL ø 360 max. ø 30 ±1 | B 52 ±2 58 ±2 } depending on comp. dimensions | | REEL ø 360 max. ø 30 ±1 | B 52 ±2 58 ±2 or 66 ±2 | REEL ø 500 max. ø 25 ±1 | B 54 ±2 60 ±2 or 68 ±2 } depending on PCM and component dimensions |
| Unit | | see details page 163. | | | | | | |

Dims in mm.

* Diameter of pins see General Data.

Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.

Position of components according to PCM 7.5 (sketch 11). P₀ = 12.7 or 15.0 is possible

Types of Tape Packaging of Capacitors for Automatic Radial Insertion


■ ROLL Packaging



■ AMMO Packaging



■ REEL Packaging

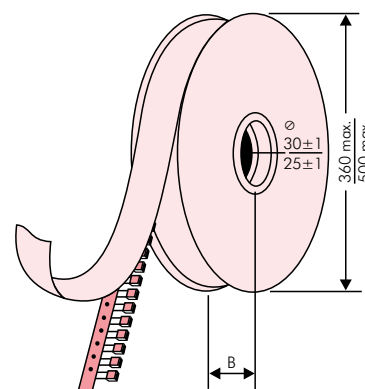

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

- article
- capacitance value
- rated voltage
- dimensions
- technical note
- capacitance tolerance
- packing
- connecting information

| | |
|---|--|
| WIMA Best Capacitors Made in Germany | |
| Werk Aurich | |
| Supplier-ID: LIEF.NR. | Date Code: 20210419 |
|  |  |
| Purchase Order No. (P/O): Bestellung xyz | P/O line: 100 |
|  |  |
| Customer Part No.: KUNDENTEILENUMMER | |
|  | |
| WIMA Part No.: MKP1F041006B00KSSD | Quantity: 459 |
|  |  |
| WIMA Confirmation No.: 0001105072000100 | |
|  | |
| Customer No.: 0000100002 | RoHS 2011/65/EU |
| Gross Weight [g]: 4557 | COO: DE |
|  |  |
| WIMA – MKP 10 WIMA Part No.: MKP1F041006B00KSSD | |
| MKP 10 1.0 µF 250 VDC 11x21x31.5 RM27.5 | |
| Standard 10% | Loss – Standard Drähte 6–2 |
| Vorlage Debitor Inland | |
|  | 0001105072000100 |
| 1002021443 | QTY: 459 Week 19/2021 |

BARCODE PDF417

BARCODE 2D Datamatrix

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm



| PCM | Size | | | | bulk | ROLL | | pcs. per packing unit | | | | AMMO | | | |
|---------|------|------|------|-------|------|-------|-------|-----------------------|-------|-----------|-----------|-------|-------|-------|-------|
| | | | | | | | | REEL | | | | | | | |
| | W | H | L | Codes | | H16.5 | H18.5 | ø 360 | ø 500 | 340 x 340 | 490 x 370 | H16.5 | H18.5 | H16.5 | H18.5 |
| | | | | | S | N | O | F | I | H | J | A | C | B | D |
| 2.5 mm | 2.5 | 7 | 4.6 | 0B | 5000 | 2200 | | 2500 | | – | | 2800 | | – | |
| | 3 | 7.5 | 4.6 | 0C | 5000 | 2000 | | 2300 | | – | | 2300 | | – | |
| | 3.8 | 8.5 | 4.6 | 0D | 5000 | 1500 | | 1800 | | – | | 1800 | | – | |
| | 4.6 | 9 | 4.6 | 0E | 5000 | 1200 | | 1500 | | – | | 1500 | | – | |
| | 5.5 | 10 | 4.6 | 0F | 5000 | 900 | | 1200 | | – | | 1200 | | – | |
| 5 mm | 2.5 | 6.5 | 7.2 | 1A | 5000 | 2200 | | 2500 | | – | | 2800 | | – | |
| | 3 | 7.5 | 7.2 | 1B | 5000 | 2000 | | 2300 | | – | | 2300 | | – | |
| | 3.5 | 8.5 | 7.2 | 1C | 5000 | 1600 | | 2000 | | – | | 2000 | | – | |
| | 4.5 | 6 | 7.2 | 1D | 6000 | 1300 | | 1500 | | – | | 1500 | | – | |
| | 4.5 | 9.5 | 7.2 | 1E | 4000 | 1300 | | 1500 | | – | | 1500 | | – | |
| | 5 | 10 | 7.2 | 1F | 3500 | 1100 | | 1400 | | – | | 1400 | | – | |
| | 5.5 | 7 | 7.2 | 1G | 4000 | 1000 | | 1200 | | – | | 1200 | | – | |
| | 5.5 | 11.5 | 7.2 | 1H | 2500 | 1000 | | 1200 | | – | | 1200 | | – | |
| | 6.5 | 8 | 7.2 | 1I | 2500 | 800 | | 1000 | | – | | 1000 | | – | |
| | 7.2 | 8.5 | 7.2 | 1J | 2500 | 700 | | 1000 | | – | | 1000 | | – | |
| | 7.2 | 13 | 7.2 | 1K | 2000 | 700 | | 950 | | – | | 1000 | | – | |
| | 8.5 | 10 | 7.2 | 1L | 2000 | 600 | | 800 | | – | | 800 | | – | |
| | 8.5 | 14 | 7.2 | 1M | 1500 | 600 | | 800 | | – | | 800 | | – | |
| | 11 | 16 | 7.2 | 1N | 1000 | 500 | | 600 | | – | | 640 | | – | |
| 7.5 mm | 2.5 | 7 | 10 | 2A | 5000 | – | | 2500 | | 4400 | | 2500 | | – | |
| | 3 | 8.5 | 10 | 2B | 5000 | – | | 2200 | | 4300 | | 2300 | | 4150 | |
| | 4 | 9 | 10 | 2C | 4000 | – | | 1700 | | 3200 | | 1700 | | 3000 | |
| | 4.5 | 9.5 | 10.3 | 2D | 3500 | – | | 1500 | | 2900 | | 1400 | | 2700 | |
| | 5 | 10.5 | 10.3 | 2E | 3000 | – | | 1300 | | 2500 | | 1300 | | – | |
| | 5.7 | 12.5 | 10.3 | 2F | 2000 | – | | 1000 | | 2200 | | 1100 | | – | |
| | 7.2 | 12.5 | 10.3 | 2G | 1500 | – | | 900 | | 1800 | | 1000 | | – | |
| 10 mm | 3 | 9 | 13 | 3A | 3000 | – | | 1100 | | 2200 | | – | | 1900 | |
| | 4 | 8.5 | 13.5 | FA | 3000 | – | | 900 | | 1600 | | – | | 1450 | |
| | 4 | 9 | 13 | 3C | 3000 | – | | 900 | | 1600 | | – | | 1450 | |
| | 4 | 9.5 | 13 | 3D | 3000 | – | | 900 | | 1600 | | – | | 1400 | |
| | 5 | 10 | 13.5 | FB | 2000 | – | | 700 | | 1300 | | – | | 1200 | |
| | 5 | 11 | 13 | 3F | 3000 | – | | 700 | | 1300 | | – | | 1100 | |
| | 6 | 12 | 13 | 3G | 2400 | – | | 550 | | 1100 | | – | | 1000 | |
| | 6 | 12.5 | 13 | 3H | 2400 | – | | 550 | | 1100 | | – | | 1000 | |
| 15 mm | 8 | 12 | 13 | 3I | 2000 | – | | 400 | | 800 | | – | | 740 | |
| | 5 | 11 | 18 | 4B | 2400 | – | | 600 | | 1200 | | – | | 1150 | |
| | 5 | 13 | 19 | FC | 1000 | – | | 600 | | 1200 | | – | | 1200 | |
| | 6 | 12.5 | 18 | 4C | 2000 | – | | 500 | | 1000 | | – | | 1000 | |
| | 6 | 14 | 19 | FD | 1000 | – | | 500 | | 1000 | | – | | 1000 | |
| | 7 | 14 | 18 | 4D | 1600 | – | | 450 | | 900 | | – | | 850 | |
| | 7 | 15 | 19 | FE | 1000 | – | | 450 | | 900 | | – | | 850 | |
| | 8 | 15 | 18 | 4F | 1200 | – | | 400 | | 800 | | – | | 740 | |
| | 8 | 17 | 19 | FF | 500 | – | | 400 | | 800 | | – | | 740 | |
| | 9 | 14 | 18 | 4H | 1200 | – | | 350 | | 700 | | – | | 650 | |
| | 9 | 16 | 18 | 4J | 900 | – | | 350 | | 700 | | – | | 650 | |
| 22.5 mm | 10 | 18 | 19 | FG | 500 | – | | 300 | | 650 | | – | | 590 | |
| | 11 | 14 | 18 | 4M | 1000 | – | | 300 | | 600 | | – | | 540 | |
| | 5 | 14 | 26.5 | 5A | 1200 | – | | – | | 800 | | – | | 770 | |
| | 6 | 15 | 26.5 | 5B | 1000 | – | | – | | 700 | | – | | 640 | |
| | 7 | 16.5 | 26.5 | 5D | 760 | – | | – | | 600 | | – | | 550 | |
| | 8 | 20 | 28 | 5H | 500 | – | | – | | 500 | | – | | 480 | |
| | 8.5 | 18.5 | 26.5 | 5F | 500 | – | | – | | 480 | | – | | 450 | |
| 22.5 mm | 10 | 22 | 28 | FI | 570* | – | | – | | 420 | | – | | 380 | |
| | 10.5 | 19 | 26.5 | 5G | 594* | – | | – | | 400 | | – | | 360 | |
| | 10.5 | 20.5 | 26.5 | 5H | 594* | – | | – | | 400 | | – | | 360 | |
| | 11 | 21 | 26.5 | 5I | 561* | – | | – | | 380 | | – | | 350 | |
| | 12 | 24 | 28 | FJ | 480* | – | | – | | 350 | | – | | 310 | |

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions.

Rights reserved to amend design data without prior notification.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

| PCM | Size | | | | bulk | ROLL | | pcs. per packing unit | | | | AMMO | | | |
|----------------|------|------|------|-----------|----------|----------|----------|-----------------------|----------|-----------|-----------|----------|----------|----------|----------|
| | | | | | | | | REEL | | | | | | | |
| | W | H | L | Codes | | H16.5 | H18.5 | ø 360 | ø 500 | 340 × 340 | 490 × 370 | | | | |
| | | | | | S | N | O | F | I | H | J | A | C | B | D |
| 27.5 mm | 9 | 19 | 31.5 | 6A | 567* | – | – | – | – | 460/340* | – | – | – | – | – |
| | 11 | 21 | 31.5 | 6B | 459* | – | – | – | – | 380/280* | – | – | – | – | – |
| | 13 | 24 | 31.5 | 6D | 378* | – | – | – | – | 300 | – | – | – | – | – |
| | 13 | 25 | 33 | FK | 405* | – | – | – | – | – | – | – | – | – | – |
| | 15 | 26 | 31.5 | 6F | 324* | – | – | – | – | 270 | – | – | – | – | – |
| | 15 | 26 | 33 | FL | 324* | – | – | – | – | – | – | – | – | – | – |
| | 17 | 29 | 31.5 | 6G | 198* | – | – | – | – | – | – | – | – | – | – |
| | 17 | 34.5 | 31.5 | 6I | 198* | – | – | – | – | – | – | – | – | – | – |
| | 20 | 32 | 33 | FM | 162* | – | – | – | – | – | – | – | – | – | – |
| | 20 | 39.5 | 31.5 | 6J | 162* | – | – | – | – | – | – | – | – | – | – |
| 37.5 mm | 9 | 19 | 41.5 | 7A | 441* | – | – | – | – | – | – | – | – | – | – |
| | 11 | 22 | 41.5 | 7B | 357* | – | – | – | – | – | – | – | – | – | – |
| | 13 | 24 | 41.5 | 7C | 294* | – | – | – | – | – | – | – | – | – | – |
| | 15 | 26 | 41.5 | 7D | 252* | – | – | – | – | – | – | – | – | – | – |
| | 17 | 29 | 41.5 | 7E | 154* | – | – | – | – | – | – | – | – | – | – |
| | 19 | 32 | 41.5 | 7F | 140* | – | – | – | – | – | – | – | – | – | – |
| | 20 | 39.5 | 41.5 | 7G | 126* | – | – | – | – | – | – | – | – | – | – |
| | 24 | 45.5 | 41.5 | 7H | 112* | – | – | – | – | – | – | – | – | – | – |
| | 28 | 38 | 41.5 | 7L | 84* | – | – | – | – | – | – | – | – | – | – |
| | 31 | 46 | 41.5 | 7I | 84* | – | – | – | – | – | – | – | – | – | – |
| | 35 | 50 | 41.5 | 7J | 35* | – | – | – | – | – | – | – | – | – | – |
| | 40 | 55 | 41.5 | 7K | 28* | – | – | – | – | – | – | – | – | – | – |
| 48.5 mm | 19 | 31 | 56 | 8D | 120* | – | – | – | – | – | – | – | – | – | – |
| | 23 | 34 | 56 | 8E | 80* | – | – | – | – | – | – | – | – | – | – |
| | 27 | 37.5 | 56 | 8H | 84* | – | – | – | – | – | – | – | – | – | – |
| | 33 | 48 | 56 | 8J | 25* | – | – | – | – | – | – | – | – | – | – |
| | 37 | 54 | 56 | 8L | 25* | – | – | – | – | – | – | – | – | – | – |
| 52.5 mm | 25 | 45 | 57 | 9D | 70* | – | – | – | – | – | – | – | – | – | – |
| | 30 | 45 | 57 | 9E | 60* | – | – | – | – | – | – | – | – | – | – |
| | 35 | 50 | 57 | 9F | 25* | – | – | – | – | – | – | – | – | – | – |
| | 45 | 55 | 57 | 9H | 20* | – | – | – | – | – | – | – | – | – | – |
| | 45 | 65 | 57 | 9J | 20* | – | – | – | – | – | – | – | – | – | – |

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

■ Moulded versions. Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
 Field 5 - 6: Rated voltage
 Field 7 - 10: Capacitance
 Field 11 - 12: Size and PCM
 Field 13 - 14: Version code (e.g. Snubber versions)
 Field 15: Capacitance tolerance
 Field 16: Packing
 Field 17 - 18: Pin length (untaped)

| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
|--------------------------|---|---|---|-----------------------|---|---------------------|---|---|----------------------------|----|----|-------------------|----|------------------------|------|------|----|
| M | K | S | 2 | C | 0 | 2 | 1 | 0 | 0 | 1 | A | 0 | 0 | M | S | S | D |
| MKS 2 | | | | 63 VDC | | 0.01 μF | | | 2.5x6.5x7.2 | | | - | | 20% | bulk | 6 -2 | |
| Type description: | | | | Rated voltage: | | Capacitance: | | | Size: | | | Tolerance: | | Packing: | | | |
| SMD-PET = SMDT | | | | 50 VDC = B0 | | 22 pF = 0022 | | | 4.8x3.3x3 Size 1812 = KA | | | ±20% = M | | AMMO H16.5 340x340 = A | | | |
| SMD-PEN = SMDN | | | | 63 VDC = C0 | | 47 pF = 0047 | | | 4.8x3.3x4 Size 1812 = KB | | | ±10% = K | | AMMO H16.5 490x370 = B | | | |
| SMD-PPS = SMDI | | | | 100 VDC = D0 | | 100 pF = 0100 | | | 5.7x5.1x3.5 Size 2220 = QA | | | ±5% = J | | AMMO H18.5 340x340 = C | | | |
| FKP 02 = FKPO | | | | 250 VDC = F0 | | 150 pF = 0150 | | | 5.7x5.1x4.5 Size 2220 = QB | | | ±2.5% = H | | AMMO H18.5 490x370 = D | | | |
| MKS 02 = MKS0 | | | | 400 VDC = G0 | | 220 pF = 0220 | | | 7.2x6.1x3 Size 2824 = TA | | | ±1% = E | | REEL H16.5 360 = F | | | |
| FKS 2 = FKS2 | | | | 450 VDC = H0 | | 330 pF = 0330 | | | 7.2x6.1x5 Size 2824 = TB | | | ... | | REEL H16.5 500 = H | | | |
| FKP 2 = FKP2 | | | | 520 VDC = H2 | | 470 pF = 0470 | | | 10.2x7.6x5 Size 4030 = VA | | | | | REEL H18.5 360 = I | | | |
| FKS 3 = FKS3 | | | | 600 VDC = I0 | | 680 pF = 0680 | | | 12.7x10.2x6 Size 5040 = XA | | | | | REEL H18.5 500 = J | | | |
| FKP 3 = FKPD | | | | 630 VDC = J0 | | 1000 pF = 1100 | | | 15.3x13.7x7 Size 6054 = YA | | | | | ROLL H16.5 = N | | | |
| MKS 2 = MKS2 | | | | 700 VDC = K0 | | 1500 pF = 1150 | | | 2.5x7x4.6 PCM 2.5 = 0B | | | | | ROLL H18.5 = O | | | |
| MKP 2 = MKPD | | | | 800 VDC = L0 | | 2200 pF = 1220 | | | 3x7.5x4.6 PCM 2.5 = 0C | | | | | BLISTER W12 180 = P | | | |
| MKS 4 = MKS4 | | | | 850 VDC = M0 | | 3300 pF = 1330 | | | 2.5x6.5x7.2 PCM 5 = 1A | | | | | BLISTER W12 330 = Q | | | |
| MKP 4 = MKPD | | | | 900 VDC = N0 | | 4700 pF = 1470 | | | 3x7.5x7.2 PCM 5 = 1B | | | | | BLISTER W16 330 = R | | | |
| MKP 10 = MKPD | | | | 1000 VDC = O1 | | 6800 pF = 1680 | | | 2.5x7x10 PCM 7.5 = 2A | | | | | BLISTER W24 330 = T | | | |
| FKP 4 = FKPD | | | | 1100 VDC = P0 | | 0.01 μF = 2100 | | | 3x8.5x10 PCM 7.5 = 2B | | | | | Bulk/TPS Standard = S | | | |
| FKP 1 = FKPD | | | | 1200 VDC = Q0 | | 0.022 μF = 2220 | | | 3x9x13 PCM 10 = 3A | | | | | ... | | | |
| MKP-X2 = MKX2 | | | | 1250 VDC = R0 | | 0.047 μF = 2470 | | | 4x9x13 PCM 10 = 3C | | | | | | | | |
| MKP-X1 R = MKX1 | | | | 1500 VDC = S0 | | 0.1 μF = 3100 | | | 5x11x18 PCM 15 = 4B | | | | | | | | |
| MKP-Y2 = MKY2 | | | | 1600 VDC = T0 | | 0.22 μF = 3220 | | | 6x12.5x18 PCM 15 = 4C | | | | | | | | |
| MP 3-X2 = MPX2 | | | | 1700 VDC = TA | | 0.47 μF = 3470 | | | 5x14x26.5 PCM 22.5 = 5A | | | | | | | | |
| MP 3-X1 = MPX1 | | | | 2000 VDC = U0 | | 1 μF = 4100 | | | 6x15x26.5 PCM 22.5 = 5B | | | | | | | | |
| MP 3-Y2 = MPY2 | | | | 2500 VDC = V0 | | 2.2 μF = 4220 | | | 9x19x31.5 PCM 27.5 = 6A | | | | | | | | |
| MP 3R-Y2 = MPRY | | | | 3000 VDC = W0 | | 4.7 μF = 4470 | | | 11x21x31.5 PCM 27.5 = 6B | | | | | | | | |
| MKP 4F = MKPF | | | | 4000 VDC = X0 | | 10 μF = 5100 | | | 9x19x41.5 PCM 37.5 = 7A | | | | | | | | |
| Snubber MKP = SNMP | | | | 6000 VDC = Y0 | | 22 μF = 5220 | | | 11x22x41.5 PCM 37.5 = 7B | | | | | | | | |
| Snubber FKP = SNFP | | | | 250 VAC = 0V | | 47 μF = 5470 | | | 19x31x56 PCM 48.5 = 8D | | | | | | | | |
| GTO MKP = GTOM | | | | 275 VAC = 1V | | 100 μF = 6100 | | | 25x45x57 PCM 52.5 = 9D | | | | | | | | |
| DC-LINK MKP 4 = DCP4 | | | | 300 VAC = 2V | | 220 μF = 6220 | | | ... | | | | | | | | |
| DC-LINK MKP 6 = DCP6 | | | | 305 VAC = AV | | 1000 μF = 7100 | | | | | | | | | | | |
| DC-LINK HC = DCHC | | | | 350 VAC = BV | | 1500 μF = 7150 | | | | | | | | | | | |
| | | | | 440 VAC = 4V | | ... | | | | | | | | | | | |
| | | | | 500 VAC = 5V | | | | | | | | | | | | | |
| | | | | ... | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | |